

Initial Environmental Examination

Document stage: Draft
Project number: 49329-006
November 2018

BAN: Second City Region Development Project – Dhaka Region Roads (Gazipur City Corporation)

Package No: CRDP-II/LGED/Gazipur/GCC/NCB/2018/W-01

Prepared by the Local Government Engineering Department, Government of Bangladesh for the Asian Development Bank.

This draft initial environmental examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, management, or staff, and may be preliminary in nature. Your attention is directed to the “terms of use” section of this website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

Initial Environmental Examination

Document Stage: Draft
Project Number: 49329-006
November 2018

Second City Region Development Project

Dhaka Region Roads (GCC)

Package No. CRDP-II/LGED/Gazipur/GCC/NCB/2018/W-01

Prepared by Local Government Engineering Department, Government of Bangladesh for the Asian Development Bank.

CURRENCY EQUIVALENTS

(as of 1 December 2018)

Currency Unit = taka (Tk)

Tk1.00 = \$0.0117

\$1.00 = Tk85.15

ABBREVIATION

ADB	-	Asian Development Bank
BOQ	-	Bill of Quantities
CRDP	-	City Region Development Project
DOE	-	Department of Environment
EARF	-	Environmental Assessment and Review Framework
ECC	-	Environmental Clearance Certificate
ECR	-	Environmental Conservation Rules
EIA	-	environmental impact assessment
EMP	-	environmental management plan
GRC	-	Grievance Redress Committee
GRM	-	grievance redress mechanism
IEE	-	initial environmental examination
LGED	-	Local Government Engineering Department
PDSC	-	Preparation, Design and Supervision Consultant
NGO	-	nongovernment organization
NOC	-	no objection certificate
O&M	-	operations and maintenance
PIU	-	Project Implementation Unit
PMCU	-	Project Management and Coordination Unit
REA	-	rapid environmental assessment
ROW	-	right -of -way
SPS	-	safeguard policy statement
WBM	-	water bound macadam

NOTE

In this report, "\$" refers to United States dollar.

This initial environmental examination report is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature. Your attention is directed to the "terms of use" section on ADB's website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

Table of Contents

I. INTRODUCTION	1
II. POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK.....	9
A. ADB Safeguard Policy Statement.....	9
B. National Environmental Impact Assessment Law	12
C. Application for Environmental Clearance.....	15
D. Applicable Environmental Standards.....	17
E. Other Relevant National Laws.....	20
F. International Environmental Agreements.....	21
III. DESCRIPTION OF THE SUBPROJECT.....	23
A. Subproject Scope and Components.....	23
B. Existing Condition of Subproject Components.....	23
C. Proposed Interventions or Development	31
IV. DESCRIPTION OF THE ENVIRONMENT	67
A. Physical Resources.....	68
B. Ecological Resources.....	71
V. ASSESSMENT OF ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES....	78
A. Compliance with subproject selection criteria	78
B. Anticipated Impacts and Mitigation Measures - Planning, Location and Design Phase.....	79
C. Anticipated Impacts and Mitigation Measures – Construction Phase.....	82
D. Anticipated Impacts and Mitigation Measures–Operation & Maintenance Phase ...	90
VI. CONSULTATION, INFORMATION DISCLOSURE, AND GRIEVANCE REDRESS MECHANISM.....	92
A. Consultation.....	92
B. Information Disclosure	92
C. Grievance Redress Mechanism	93
VII. ENVIRONMENTAL MANAGEMENT PLAN	97
A. Institutional Arrangements.....	97
B. Environmental Management Plan	99
C. Environmental Monitoring Program	113
D. Capacity Development Training	90
E. Environmental Management and Monitoring Plan Implementation Cost	92
VIII. MONITORING AND REPORTING	94
IX. CONCLUSION AND RECOMMENDATIONS.....	95

APPENDIXES

Appendix 1: Rapid Environmental Assessment (REA) Checklist	96
Appendix 2: Template for Application for Environmental Clearance Certificate from Bangladesh Department of Environment	100
Appendix 3: Strip Maps of Subproject Alignments Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway from Ch.0+000 km to Ch.3+910 km (Road ID # ORG2).....	102
Appendix 4: Strip Maps of Subproject Alignments Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh from Ch. 0+000 Km to Ch. 1+745 Km, (Road ID # LRG4)	118
Appendix 5: Strip Maps of Subproject Alignments IUT to Icarandi Road And Signboard to Kamarjuri Road (ID- LRG6).....	130
Appendix 6: Sample Spoil Management Plan	144
Appendix 7: LGED Tree Plantation Program Manual (Cover Page and Table of Contents)....	160
Appendix 8: Strip Maps Showing PCRs (Religious Establishments) Along the Road Alignments	168
Appendix 9: Public Consultation.....	174
Appendix 10: Sample Grievance Registration Form.....	192
Appendix 11: Suggested Template for Record-Keeping of Grievances	193
Appendix 12: Indicative Terms of Reference for Safeguards Specialist for PMCU, PIUs and PDSC.....	194
Appendix 13: Traffic Management Plan Template	197
Appendix 14: Sample Daily Monitoring Sheet for Contractors	202
Appendix 15: Sample Inspection Report for PMCU and PIUs	205
Appendix 16: Semi-Annual Environmental Monitoring Template	208

TABLES

Table 1: Summary Environmental Clearance Application Requirements Per Categorya	13
Table 2: Government of Bangladesh Classification of the Subproject	15
Table 3: Ambient Air Quality Standards.....	17
Table 4: Ambient Noise Quality Standards.....	20
Table 5: Summary of Relevant Government Laws, Regulations, & Environmental Standards..	20
Table 6: International Environmental Agreements Relevant to Second CRDP	21
Table 7: Roadway Improvement Components.....	23
Table 8: Locations and Lengths of Proposed Protection Works Along Shahid Niamat Road (Road ID # ORG2)	32
Table 9: Summary of Improvement Works for Shahid Niamat Road (Road ID # ORG2)	33
Table 10: Summary of Proposed Improvement Works for Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh from Ch. 0+000 Km to Ch. 1+745 Km, (Road ID LRG4)	44

Table 11: Locations and Lengths of Proposed Protection Works at IUT to Icharkandi Road including Link Road and Signboard to Kamarjuri road (Road ID LRG6)	51
Table 12: Summary of Proposed Improvement Works for IUT to Icharkandi Road Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and 2.625 km long Signboard to Kamarjuri road (Road ID # LRG6)	52
Table 13: Summary of environmental features around road alignments	74
Table 14: Baseline data and projection for 2050 of Tmax and Rainfall for Gazipur	75
Table 15: Changes of Tmin and Tmax (OC) and Rainfall (mm) in Gazipur	76
Table 16: Compliance matrix with subproject selection criteria	78
Table 17: Issues, Concerns and Mitigation Measures During Design Phase	81
Table 18: Institutional Roles and Responsibilities	98
Table 19: Environmental Management Plan Matrix	101
Table 20: Environmental Monitoring Program	114
Table 21: Training Program for Environmental Management	91
Table 22: Tentative EMP Budget for BOQ	93

FIGURES

Figure 1: Location Map of Subproject (Yellow Lines)	2
Figure 2: Government Environmental Clearance Process	16
Figure 3: Site Photographs from Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka -Mymensingh Highway road	25
Figure 4: Site Photographs from Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh road	28
Figure 5: Site Site Photographs from IUT to Icharkandi Road including Link Road and Signboard to Kamarjuri road	31
Figure 6: Typical cross section (Ch. 0+000 to 1+575 km)	35
Figure 7: Typical cross section (Ch. 1+575 to 2+450 km & Ch. 2+450 to 3+330 km)	37
Figure 8: Typical cross section (Ch. 3+300 to 3+425 km & Ch. 3+725 to 3+910 km)	39
Figure 9: Typical Cross section (Ch. 3+425 km to 3+723 km)	41
Figure 10: Typical cross section (Ch. 0+000 to 0+450 km)	45
Figure 11: Typical cross section (Ch. 0+450 to 1+745 km) & (Ch. 0+000 to 0+395 km (Link 1)	47
Figure 12: Typical cross section (Ch. 0+000 to 0+575 km (Link 2)	49
Figure 13: Typical cross section (Ch. 0+000 to 0+725 km) & (Ch. 3+350 to 4+010 km)	54
Figure 14: Typical cross section (Ch. 0+725 to 2+000 km) & (Ch. 2+575 to 2+900 km)	56
Figure 15: Typical cross section (Ch. 2+000 to 2+575 km) & (Ch. 2+900 to 3+125 km) & (Ch. 3+125 to 3+350 km)	58
Figure 16: Typical cross section (Ch. 4+010 to 4+050 km) & (Ch. 0+000 to 0+200 km (Link -1)	60
Figure 17: Typical cross section (Ch. 0+000 to 0+727 km)	62
Figure 18: Typical cross section (Ch. 0+727 to 1+650 km)	64
Figure 19: Typical cross section (Ch. 1+650 to 2+150 km) & (Ch. 2+150 to 2+625 km)	66
Figure 20: Map showing location of subproject sites relative to Shitalakshya and Meghna rivers	69
Figure 21: Aerial Map Showing the Locations of Cultural Heritage Sites Relative to the Subproject Alignments	73
Figure 22: Project Grievance Redress Mechanism	95

Executive Summary

The Second City Region Development Project (the project) will support development in the city regions of Dhaka and Khulna by building upon infrastructure and capacity building initiatives implemented during the first City Region Development Project (CRDP) funded by the Asian Development Bank (ADB). The project will finance additional crucial infrastructure in urban and peri-urban areas needed to stimulate growth and improve livability Dhaka and Khulna, two densely populated rapidly growing city regions of Bangladesh. The project will also continue strengthening capacity for project development, sustainable service delivery, and community awareness. The project will be implemented over a five-year period.

Subproject Scope. This initial environmental examination (IEE) report has been prepared for one of the subprojects of the project that is covered by Package Number CRDP-II/LGED/GCC/NCB/2018/W-01. This package includes combination of construction and rehabilitation of the following road alignments or components in the Gazipur Sadar Upazila in Dhaka city region: (i) Road 1- ID ORG 2: Improvement of Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway (3.91 km); (ii) Road 2- ID LRG4: Improvement of Ambagh Municipal Road from Dhaka-Tangail Road (Era Filling Station) to Ambagh GP School via Dalai Morh (1.745 km); (iii) Road 3- ID LRG6: Improvement Road from IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and Road from Signboard to Kamarjuri Road (Ch. 0+000km to Ch. 2+625km).

Categorization. ADB requires the consideration of environmental issues in all aspects of ADB's operations, and the requirements for environmental assessment are described in ADB Safeguard Policy Statement (SPS), 2009. Using ADB Rapid Environmental Assessment Checklist, the subproject is classified as Environmental Category B per ADB SPS, 2009 as no diverse, irreversible or unprecedented significant impacts are envisaged. ADB's Environment and Safeguards Division confirmed this categorization on 27 August 2018. Accordingly, this IEE has been undertaken, which assesses in more detail the likely environmental impacts of the subproject and provides an environmental management plan (EMP) specifying the required mitigation and monitoring measures to ensure that these impacts are managed to acceptable levels. This IEE also emphasizes the need to incorporate pollution prevention and control technologies during the design, construction, and operation of the subproject and adhere to internationally recognized standards such as the World Bank Group's Environment, Health and Safety Guidelines.

Environmental Management. The potential impacts and mitigation measures have been identified through review of the subproject designs, discussion with the designers, and stakeholder consultation. An EMP is included as part of this IEE, which discusses the following:

- (i) Mitigation measures for environmental impacts during implementation; and
- (ii) An environmental monitoring program, and the responsible entities for mitigating, monitoring, and reporting .

The total length of the three subproject roads is 13.50 km. The subproject road alignments pass more or less through built-up areas of small and medium enterprises, markets or bazars, agricultural or open fields, sporadically scattered rural human settlements and various ponds, ditches and low-lying areas on both sides; and traverse along and/or cross some canals. These subproject roads are expected to establish more efficient connectivity within the Dhaka city region.

The subproject road alignments are not within or located near any ecologically critical areas, and further development interventions to these roads will not have any significant impact on the physical, biological and social environment. This IEE has been conducted to evaluate any potential environmental impacts of the subproject and propose measures to mitigate these impacts, including monitoring.

The subproject does not involve any special considerations regarding location since the roads occupy existing rights-of-way (ROWs). There will be no road widening beyond these ROWs, and therefore no land acquisition is required. No private property will be affected and the methods to be used for site preparation, construction and commissioning, as well as associated arrangements to ensure sound environmental management and safety at all times, are to be defined by the Contractor in a Site-specific Environmental Management Plan (SEMP) based on the EMP of this IEE. Contractor will submit its SEMP for approval to the project implementation unit (PIU). This will cover the following areas of impact which are potentially significant but can be mitigated by the adoption of good practice: (i) impedance of traffic, (ii) noise pollution and vibration, (iii) waste generation (iv) release of silt from excavations, (v) water pollution, (vi) air and dust pollution, (vii) community health and safety risks, and (viii) occupational health and safety.

Grievance Redress Mechanism. The project will adopt the grievance redress mechanism (GRM) outline of the first CRDP. The GRM shall be set up to register grievances of the people regarding technical, social and environmental aspects. The process will be designed to be transparent, gender responsive, culturally appropriate and commensurate to the risks and adverse impacts of the project, as well as readily accessible to all segments of the affected people. The project GRM will not supersede any legal government grievance procedures. Affected people are to be informed about the mechanism through media and public outlets. This participatory process shall ensure that all views of the people are adequately reviewed and suitably incorporated in the design and implementation process.

Implementation Arrangement. The executing and implementing agency is the Local Government and Engineering Department (LGED) of the Government of Bangladesh. The LGED will establish a Project Management and Coordination Unit (PMCU) comprising officials including an Environmental Safeguard Officer who is a permanent employee of LGED. The PMCU will be strengthened with external experts or consultants in environmental and social safeguards, including experts on finance, procurement, technical areas, and contract management. PIUs will be established at the Upazila or local level where the project subprojects are located. In this subproject, **Savar Upazila** will serve as the PIU. The PMCU and **Savar PIU** will have responsibility for overseeing subproject management, including overseeing EMP implementation.

For civil works, the Contractor will be required to (i) obtain all statutory clearances prior to commencement of civil works; (ii) establish an operational system for managing environmental impacts (iii) prepare a SEMP based on the EMP of this IEE, and submit to PIU for approval; (iv) carry out all of the monitoring and mitigation measures set forth in the approved SEMP; and (v) implement any corrective or preventative actions set out in safeguards monitoring reports that the PMCU will prepare from time to time to monitor implementation of this IEE, EMP, and SEMP. The Contractor shall allocate a budget for compliance with these EMP measures, requirements and actions.

Monitoring and Reporting. The EMP compliance monitoring will be undertaken by the PMCU and PIU, with support of external experts or consultants. Contractors will submit monthly reports to PIU, while PIU submits quarterly reports to the PMCU. Consistent with reporting requirements set out in the Project Administration Manual, PMCU will prepare and submit reports to ADB on a semi-annual basis. The submission of semi-annual environmental monitoring reports to ADB will continue until ADB issues a Project Completion Report for the project.

Conclusion. The overall finding of this IEE is that the subproject will result in significant environmental benefits because the current conditions of roads will be improved and will be much better for local residents. Severe traffic congestion will be lessened and thereby reducing vehicle noise (honking of horns) and air pollution (idling vehicles) in the subproject areas. Ultimately, the subproject will result in significant economic benefit because the road network could cater to more inclusive and environmentally sustainable economic growth in the Dhaka city region. The subproject will not have diverse, irreversible or unprecedented adverse environmental impacts and the potential significant impacts identified are associated with the construction phase, which can be managed through effective implementation of the EMP. No further environmental assessment is therefore required and the classification of Category B per ADB SPS, 2009 is confirmed.

This IEE has been prepared based on preliminary designs of the subproject. The PMCU shall update this draft IEE based on final detailed design and submit to ADB for review and disclosure. The approved updated IEE shall be treated as the final IEE and shall be attached in the bid and contract documents. No works can commence until (i) the final IEE approved by ADB is provided to the Contractor, and (ii) the SEMP prepared by the Contractor is approved by Gazipur PIU. If circumstances would require, the IEE will be further updated for ADB's review during the implementation period. In the event of unanticipated impact or any design change and/or non-compliance during subproject implementation period, the IEE shall be updated to include (i) assessment of the unanticipated impact and corresponding mitigation measures; or (ii) information on the design change and assessment of associated environmental impacts, if any; and/or (iii) corrective actions, associated cost and schedule; respectively.

I. INTRODUCTION

A. Background

1. The Second City Region Development Project (the project) will support development in the city regions of Dhaka and Khulna by building upon infrastructure and capacity building initiatives implemented during the first City Region Development Project (CRDP)¹ funded by the Asian Development Bank (ADB). The project will finance additional crucial infrastructure in urban and peri-urban areas needed to stimulate growth and improve livability in Dhaka and Khulna, two densely populated rapidly growing city regions of Bangladesh. The project will also continue strengthening capacity for project development, sustainable service delivery, and community awareness. The project will be implemented over a five-year period. Specifically, the project will support the (i) construction, upgrade and rehabilitation of selected Dhaka city region roads, bridges and culverts, including drainage; (ii) construction, upgrade and rehabilitation of drainage in Khulna city region; and (iii) development of a Khulna city corporation comprehensive solid waste management plan and small works.

2. The project will be implemented over a five-year period. The indicative list of subprojects is summarized in the environmental assessment and review framework drafted for the project. The subprojects are largely built around 'integrated area planning' which seeks to enhance economic activity in the city regions and provides opportunities for investment, including (i) transport infrastructure upgrading; and (ii) solid waste management.

3. The project has been classified as environmental category B per ADB Safeguard Policy Statement (SPS), 2009.² Project preparation was supported by (i) A project preparatory technical assistance (TA);³ and (ii) a project design advance loan of \$5 million to finance preparation, design and supervision consultancy services. Part of the preparatory work was the preparation of the environmental assessment and review framework (EARF) and initial environmental examination (IEE) reports in accordance with the requirements of ADB SPS, 2009. Further support was provided by ADB in preparing the EARF and IEE reports for sample subprojects to meet the requirements for projects proposed under a sector loan modality.

This IEE report has been prepared for the subproject covered by Package Number CRDP-II/LGED/Gazipur/GCC/NCB/2018/W-01, which includes combination of construction and rehabilitation of the following road alignments or components in the Gazipur Sadar Upazila in Dhaka city region: (i) Road 1- ID ORG 2: Improvement of Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway (3.91 km); (ii) Road 2- ID LRG4: Improvement of

¹ ADB. 2010. [People's Republic of Bangladesh: City Region Development Project](#). Manila.

² ADB's Environment and Safeguards Division confirmed the Category B classification of the project on 27 August 2018. A project's category is determined by the category of its most environmentally sensitive component, including direct, indirect, cumulative, and induced impacts in the project's area of influence. Each proposed project is scrutinized as to its type, location, scale, and sensitivity and the magnitude of its potential environmental impacts. Projects are assigned to one of the following four categories: (i) **Category A**. A proposed project is classified as category A if it is likely to have significant adverse environmental impacts that are irreversible, diverse, or unprecedented. These impacts may affect an area larger than the sites or facilities subject to physical works. An environmental impact assessment is required. (ii) **Category B**. A proposed project is classified as category B if its potential adverse environmental impacts are less adverse than those of category A projects. These impacts are site-specific, few if any of them are irreversible, and in most cases mitigation measures can be designed more readily than for category A projects. An initial environmental examination is required. (iii) **Category C**. A proposed project is classified as category C if it is likely to have minimal or no adverse environmental impacts. No environmental assessment is required although environmental implications need to be reviewed. (iv) **Category FI**. A proposed project is classified as category FI if it involves investment of ADB funds to or through a financial intermediary. ADB Environment and Safeguards Division confirmed this categorization on 27 August 2018.

³ ADB. [People's Republic of Bangladesh: City Region Development Project II](#).

Ambagh Municipal Road from Dhaka-Tangail Road (Era Filling Station) to Ambagh GP School via Dalai Morh (1.745 km); (iii) Road 3- ID LRG6: Improvement Road from IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road & Road from Signboard to Kamarjuri Road (Ch. 0+000km to Ch. 2+625km).

4. Purpose of the Initial Environmental Examination

5. The purpose of this IEE is to describe the assessment of environmental impacts due to the proposed subproject based on the detailed design produced under the project, and to specify measures to address impacts. This IEE is based on engineering design information, a field visit, and secondary data to characterize the environment. It contains the results of interviews and consultations with stakeholders. This IEE includes an environmental management plan (EMP) outlining mitigation measures and monitoring requirements, and environmental specifications to be appended to contract documents.

6. Screening using ADB's Rapid Environmental Assessment Checklist for Road (**Appendix 1**) was initially conducted, and results of the rapid assessment show that the project is unlikely to cause any diverse, irreversible or unprecedented significant impacts, and therefore classified under Category B per ADB SPS, 2009. ADB's Environment and Safeguards Division confirmed this categorization on 27 August 2018. Thus, this IEE has been prepared in accordance with ADB SPS, 2009 requirements for environment category B projects. The location of the subproject is shown in **Figure 1(a & b)**.

Figure 1a: Location Map on Google Earth (Red Lines)

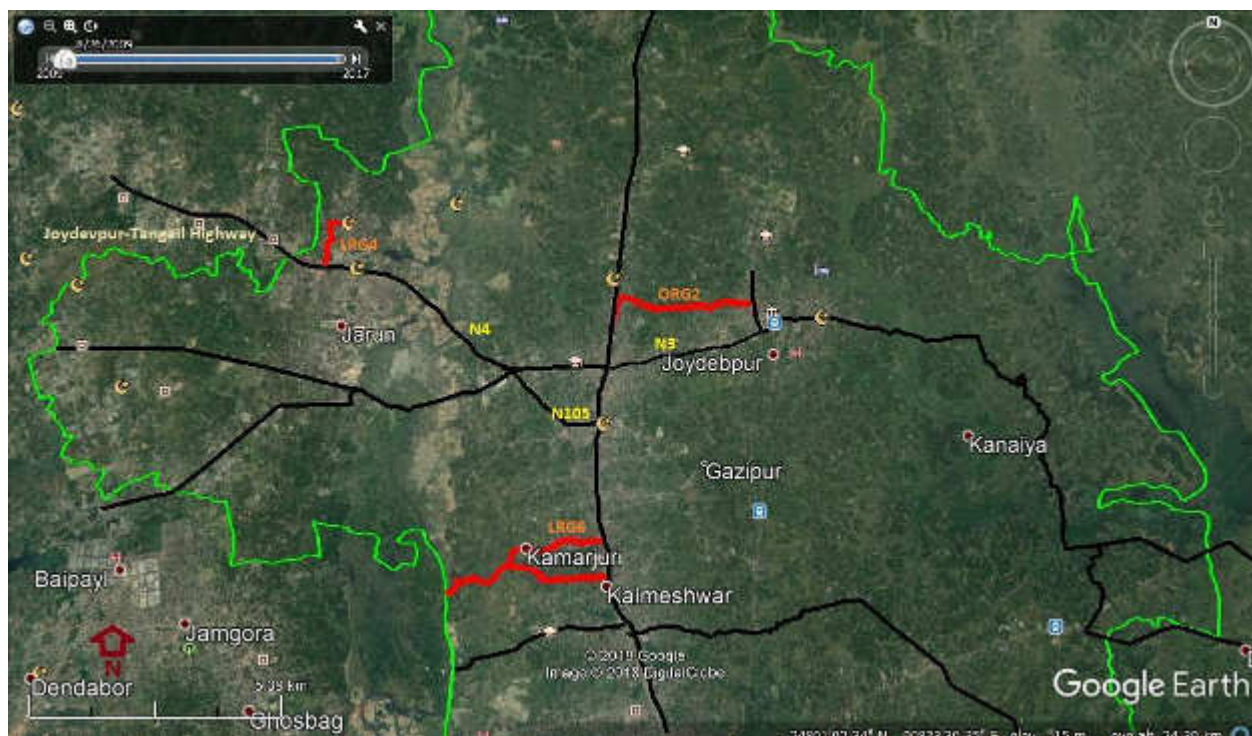


Figure: 1 b: The Location Map of the SubProject

Figure: 1 b: The Location Map of the SubProject

B. Extent of the Study

7. This IEE has been carried out based on most up-to-date subproject details and designs provided by the design team during the preparation of this report. Minor changes may occur in the structural component of the subprojects at the detailed designing stage. The scope of the IEE study has been confined to project related activities associated with design, construction (e.g., site clearing, earth borrowing, quarrying, material transportation, paving, camping) and operation stages.

C. Methodology

8. This IEE has been carried out using reconnaissance survey, field visits, consultation with stakeholders and others, Non-Government Organizations (NGOs), review of existing data, assessment to identify adverse impacts and preparation of EMP and monitoring program at all stages of subproject implementation. Physical assessments were made for entire corridors with

respect to terrestrial and aquatic resources, including physical cultural resources and other natural and man-made structures.

II. POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK

9. ADB will not finance any project if it does not comply with ADB SPS, 2009 nor will it finance any project if it does not comply with its host country's environmental and social safeguard laws. Where discrepancy between ADB and Government policies exist, the stricter policy will prevail. Moreover, ADB SPS, 2009 applies to all ADB-financed and/or ADB-administered sovereign projects, and their components regardless of the source of financing, including investment projects funded by a loan; and/or a grant; and/or other means.

A. ADB Safeguard Policy Statement

10. ADB SPS, 2009 requires borrowers to meet a set of requirements (Safeguards Requirements 1) when delivering environmental safeguards for projects supported by ADB. The objectives are to ensure the environmental soundness and sustainability of projects, and to support the integration of environmental considerations into the project decision-making process. Hence, the project is required to comply with these requirements. Summary of the step by step process is discussed below in this section. Detailed discussions are provided in the ADB SPS, 2009.⁴

11. **Screening and Categorization.** Subprojects are to be screened for their expected environmental impacts and are assigned to a specific category (footnote 3). Categorization is to be based on the most environmental sensitive component. However, for subproject(s) with component(s) that can trigger Category A or with potentially significant adverse impacts that are diverse, irreversible, or unprecedented, project management and coordination unit (PMCU) shall examine alternatives to the subproject's location, design, technology, and components that would avoid, and, if avoidance is not possible, minimize adverse environmental impacts and risks, and to meet Category B categorization. The rationale for selecting the subproject location, design, technology, and components will be properly documented, including, cost-benefit analysis, taking environmental costs and benefits of the various alternatives considered into account. The "no action" alternative will be also considered. In general, criteria that can trigger subproject's 'Category A' are discussed in Section II of the EARF.

12. **Environmental Assessment.** Environmental assessment shall include description of environmental and social baseline to provide an understanding of current conditions forming the benchmark against which subproject impacts are assessed. Environmental impacts and risks will be analyzed for all relevant stages of the project cycle, including design and planning stage, construction, operations, decommissioning, and post-closure activities such as rehabilitation or restoration. This IEE may be used as model document for other future roads subprojects.

13. **Environmental Planning and Management.** The PMCU shall prepare environmental management plan (EMP) to be included in the IEE report. The EMP shall describe and address the potential impacts and risks identified by the environmental assessment. The level of detail and complexity of the EMP and the priority of the identified measures and actions will be commensurate with the subproject's impact and risks. The EMP shall include the proposed mitigation measures, environmental monitoring and reporting requirements, emergency response procedures, related institutional or organizational arrangements, capacity development and training measures, implementation schedule, cost estimates, and performance indicators.

⁴ ADB. 2009. [Safeguard Policy Statement](#). Manila.

14. **Public Disclosure.** The Local Government Engineering Department (LGED), through PMCU, shall submit to ADB for disclosure on ADB website so affected people, other stakeholders, and the public can provide meaningful inputs into the subproject design and implementation: ⁵

- (i) final IEE upon receipt;
- (ii) a new or updated IEE and corrective action plan prepared during subproject implementation, if any; and
- (iii) environmental monitoring reports submitted during subproject implementation upon receipt.

15. **Consultation and Participation.** The PMCU and Gazipur PIU shall carry out meaningful consultation⁶ with affected people and other concerned stakeholders, including civil society, and facilitate their informed participation. The consultation process and its results are to be documented and reflected in the environmental assessment report.

16. **Grievance Redress Mechanism.** The LGED, through PMCU, shall establish a mechanism to receive and facilitate resolution of affected peoples' concerns, complaints, and grievances about the subproject's environmental performance. The grievance mechanism shall be scaled to the risks and adverse impacts of the subproject. As of the ADB loan processing for the project, a grievance redress mechanism (GRM) has been established and discussed in detail in Section VI below.

17. **Monitoring and Reporting.** The PMCU shall monitor, measure and document the progress of implementation of the EMP. If necessary, PMCU will identify the necessary corrective actions, and reflect them in a corrective action plan. PMCU will prepare and submit to ADB semi-annual environmental monitoring reports that describe progress with implementation of the EMP and compliance issues and corrective actions, if any. For subprojects likely to have significant adverse environmental impacts during operation, reporting will continue until ADB issues a project completion report.

18. **Unanticipated Environmental Impacts.** Where unanticipated environmental impacts become apparent during subproject implementation, PMCU shall update the environmental assessment and EMP or prepare a new environmental assessment and EMP to assess the potential impacts, evaluate the alternatives, and outline mitigation measures and resources to address those impacts.

19. **Pollution Prevention and Control Technologies.** During the design, construction, and operation of the subproject the PMCU and Gazipur PIU shall apply pollution prevention and

⁵ Per ADB SPS, 2009, prior to disclosure on ADB website, ADB reviews the "borrower's/client's social and environmental assessment and plans to ensure that safeguard measures are in place to avoid, wherever possible, and minimize, mitigate, and compensate for adverse social and environmental impacts in compliance with ADB's safeguard policy principles and Safeguard Requirements 1-4."

⁶ Per ADB SPS, 2009, meaningful consultation means a process that (i) begins early in the project preparation stage and is carried out on an ongoing basis throughout the project cycle; (ii) provides timely disclosure of relevant and adequate information that is understandable and readily accessible to affected people; (iii) is undertaken in an atmosphere free of intimidation or coercion; (iv) is gender inclusive and responsive, and tailored to the needs of disadvantaged and vulnerable groups; and (v) enables the incorporation of all relevant views of affected people and other stakeholders into decision making, such as project design, mitigation measures, the sharing of development benefits and opportunities, and implementation issues.

control technologies and practices consistent with international good practice, as reflected in internationally recognized standards such as the World Bank Group's Environmental, Health and Safety Guidelines. These standards contain performance levels and measures that are normally acceptable and applicable to subprojects. When the Government regulations differ from these levels and measures, the subproject shall achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific subproject circumstances, LGED through PMCU will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS, 2009.

20. **Occupational Health and Safety.** PMCU⁷ shall ensure that workers⁸ are provided with a safe and healthy working environment, considering risks inherent to the sector and specific classes of hazards in the subproject work areas, including physical, chemical, biological, and radiological hazards. PMCU shall ensure to take steps to prevent accidents, injury, and disease arising from, associated with, or occurring during the course of work by (i) identifying and minimizing, so far as reasonably practicable, the causes of potential hazards to workers; (ii) providing preventive and protective measures, including modification, substitution, or elimination of hazardous conditions or substances; (iii) providing appropriate equipment to minimize risks and requiring and enforcing its use; (iv) training workers and providing them with appropriate incentives to use and comply with health and safety procedures and protective equipment; (v) documenting and reporting occupational accidents, diseases, and incidents; and (vi) having emergency prevention, preparedness, and response arrangements in place.

21. PMCU shall ensure to apply preventive and protective measures consistent with international good practice, as reflected in internationally recognized standards such as the World Bank Group's Environmental, Health and Safety Guidelines.⁹

22. **Community Health and Safety.** The PMCU shall ensure to identify and assess the risks to, and potential impacts on, the safety of affected communities during the design, construction, operation, and decommissioning of the subproject, and will establish preventive measures and plans to address them in a manner commensurate with the identified risks and impacts. This includes specific community road safety especially for children and elderly persons.

23. **Physical Cultural Resources.** The PMCU is responsible for siting and designing the subproject to avoid significant damage to physical cultural resources. Such resources likely to be affected by the subproject will be identified, and qualified and experienced experts will assess the subproject's potential impacts on these resources using field-based surveys as an integral part of the environmental assessment process. When the proposed location of a subproject component is in areas where physical cultural resources are expected to be found as determined during the environmental assessment process, chance finds procedures shall be included in the EMP.

24. **Environmental Audit.** When the subproject involves existing activities or facilities, PMCU is responsible to ensure that relevant external experts will perform environmental audits to determine the existence of any areas where the subproject may cause or is causing

⁷In case where responsibility is delegated to subproject contractors during construction phase, project management and coordination unit (PMCU) shall ensure that the responsibilities on occupational health and safety as described herein are included in the contract documents.

⁸Including nonemployee workers engaged by Local Government Engineering Department (LGED) through contractors or other intermediaries to work on project sites or perform work directly related to the project's core functions.

⁹World Bank Group, 2007. *Environmental, Health, and Safety General Guidelines*. Washington, DC.

environmental risks or impacts. If the subproject does not foresee any new major expansion, the audit constitutes the environmental assessment for the subproject.

25. **Bidding and Contract Documents.** IEE, which contain the EMP, shall be included in bidding and contract documents and verified by Gazipur PIU. The PMCU and Gazipur PIU shall also ensure that bidding and contract documents include specific provisions requiring contractors to (i) comply with all other conditions required by ADB;¹⁰ and (ii) to submit to Gazipur PIU, for review and approval, a site-specific environmental management plan (SEMP), including (i) proposed sites/locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid and hazardous wastes; (ii) specific mitigation measures following the approved EMP; (iii) monitoring program as per EMP; and (iv) budget for SEMP implementation, among others as may be required. No works can commence prior to approval of SEMP. A copy of the EMP and/or approved SEMP will be kept on site during the construction period at all times. Non-compliance with, or any deviation from, the conditions set out in the EMP and/or SEMP constitutes a failure in compliance and shall require corrective actions.

26. **Conditions for Award of Contract and Commencement of Work.** PMCU shall not award any Works contract under the subproject until (i) relevant provisions from the EMP are incorporated into the Works contract; (ii) this IEE is updated to reflect subproject's detailed design and PMCU has obtained ADB's clearance of such updated IEE; and (iii) IEE (i.e., IEE in compliance with Environmental Conservation Rules [ECR], 1997) approved by the Department of Environment (DOE) and other necessary permits from relevant government agencies have been obtained. For "design, build, and operate" type contracts, PMCU shall ensure no works for a subproject which involves environmental impacts shall commence until (i) relevant provisions from the EMP are incorporated into the Works contract; and (ii) this IEE is updated to reflect subproject's detailed design and PMCU has obtained ADB's clearance for such updated IEE.

B. National Environmental Impact Assessment Law

27. **Environmental Conservation Act (ECA), 1995.** Provides for the conservation of environment, improvement of environmental standards and control and mitigation of environmental pollution. In line with these provisions of the Act, the Environmental Conservation Rules, 1997 have been framed. This act provides for (i) remedial measures for injury to ecosystem; (ii) provides for any affected person due to environmental pollution to apply to DOE for remediation of the damage; (iii) discharge of excessive environmental pollutants; (iv) inspection of any activity for testing any equipment or plant for compliance to the environment act, including power to take samples for compliance; (v) power to make rules and standards with reference to environment; and (vi) penalty for non-conformance to environment act under the various sections.

28. **Environmental Conservation Rules, 1997.** The Rules outline the processes and requirements of environmental clearances for specific type of projects indicated therein and stipulates that "no industrial unit or project shall be established or undertaken without obtaining, in the manner prescribed by rules, an Environmental Clearance Certificate (ECC) from the Director General" of the DOE. Schedule 1 of the Rules classifies industrial units and projects into four categories according to their site and impact on the environment, namely (i) green, (ii) orange-A,

¹⁰ Contractors to comply with (i) all applicable labor laws and core labor standards on (a) prohibition of child labor as defined in national legislation for construction and maintenance activities; (b) equal pay for equal work of equal value regardless of gender, ethnicity, or caste; and (c) elimination of forced labor; and with (ii) the requirement to disseminate information on sexually transmitted diseases, including HIV/AIDS, to employees and local communities surrounding the project sites.

(iii) orange–B, and (iv) red. The rules specify the procedures for issuing ECC for the various categories of projects. **Table 1:** summarizes the requirements for environmental clearance application for each category.

Table 1: Summary Environmental Clearance Application Requirements Per Category^a

Category	Requirements
Green	(i) Completed Application for Environmental Clearance Certificate (ECC); (ii) Payment of the appropriate fee based on Schedule 3 of Environmental Conservation Rules (ECR), 1997; (iii) General information about the project; (iv) Exact description of the raw materials to be used and the product to be manufactured (where relevant); and (v) No objection certificate from the local authority.
Orange-A	(i) Completed Application for ECC; (ii) Payment of the appropriate fee based on Schedule 3 of ECR, 1997; (iii) General information about the project; (iv) Exact description of the raw materials to be used and the product to be manufactured (where relevant); (v) No objection certificate from the local authority; (vi) Prior issued location clearance certificate (LCC) from Department of Environment (DOE); (vii) Process flow diagram; (viii) Layout plan (showing location of Effluent Treatment Plant (ETP)); (ix) Effluent discharge arrangement; and (x) Outlines of the plan for relocation and rehabilitation (if applicable).
Orange-B	(i) Completed Application for ECC; (ii) Payment of the appropriate fee based on Schedule 3 of ECR, 1997; (iii) Report on the feasibility of the project (if still being proposed); (iv) Report on the initial environmental examination (IEE) of the project, including process flow diagram, layout plan (showing ETP), design of ETP of the project (if still being proposed); (v) Report on the environmental management plan (EMP); (vi) No objection certificate from the local authority; (vii) Prior issued LCC from DOE; (viii) Emergency plan relating to adverse environmental impact and plan for mitigation of the effect of pollution; (ix) Outline of the relocation and rehabilitation plan (where applicable); and (x) Other necessary information as may be required.
Red	(i) Completed Application for ECC; (ii) Payment of the appropriate fee based on Schedule 3 of ECR, 1997; (iii) Report on the feasibility of the project (if still being proposed); (iv) Report on the IEE of the project and the terms of reference (TOR) for environmental impact assessment of the project; or environmental impact assessment (EIA) report on the basis of the TOR previously approved by DOE, including process flow diagram, layout plan (showing ETP), design of ETP of the project (if still being proposed); (v) Report on the EMP; (vi) No objection certificate from the local authority; (vii) Prior issued LCC from DOE; (viii) Emergency plan relating to adverse environmental impact and plan for mitigation of the effect of pollution; (ix) Outline of the relocation and rehabilitation plan (where applicable); and (x) Other necessary information as may be required.

DOE = Department of Environment, ECC = Environmental Clearance Certificate, ECR = Environmental Conservation Rules, EIA = environmental impact assessment, EMP = environmental management plan, ETP = Effluent Treatment Plant, IEE = initial environmental examination, LCC = location clearance certificate, TOR = term of reference.

^a A Guide to Environmental Clearance Procedure, DOE, Bangladesh Ministry of Environment and Forests, August 2010.

29. Schedule 1 of ECR, 1997 provides the classification for industrial projects and types of development that are common in Bangladesh. **Table 2** indicates the subproject's category and its likely classifications based on this schedule.

Table 2: Government of Bangladesh Classification of the Subproject

	Subproject	Component	Equivalent in Schedule I of Environmental Conservation Rules	Department of Environment Classification
1.	Roads	Roads	Construction, re-construction and extension of road (feeder road, local road)	Orange – B
		Bridges and culverts	Construction, re-construction and extension of bridge/culvert (length below 100 meters)	Orange – B

C. Application for Environmental Clearance

30. The application and requirement for issuance of ECC are described in the ECR, 1997 and summarized in **Table 1:** . This involves the completion and submission of an application using a form available from the DOE website,¹¹ which is revised from time to time. See **Appendix 2** for template being used of this date. The accomplished application form is submitted to DOE together with requirements as enumerated in **Table 1:** . The proponent is also required to pay equivalent application fee prescribed in Schedule 13 of ECR, 1997.


31. The ECC is issued within 30 days from receipt of the application by DOE. Such ECC is required to be renewed every year from the date of its effectivity. For the project, PMCU is responsible for application for ECC. This ECC will cover all subprojects identified under the project. Application for said ECC is ongoing.¹²


Figure 2 shows the summary of review process and timelines set under ECR, 1997, leading to the issuance of ECC by DOE.

¹¹ Government of Bangladesh. .

¹²Per information from project management and coordination unit (PMCU), the required fee for Environmental Clearance Certificate (ECC) application and other necessary documents have been submitted to Department of Environment (DOE) as of July 2018. Once approved for Asian Development Bank (ADB) project processing, this initial environmental examination (IEE) will be used in the ECC application with DOE.

Figure 2: Government Environmental Clearance Process

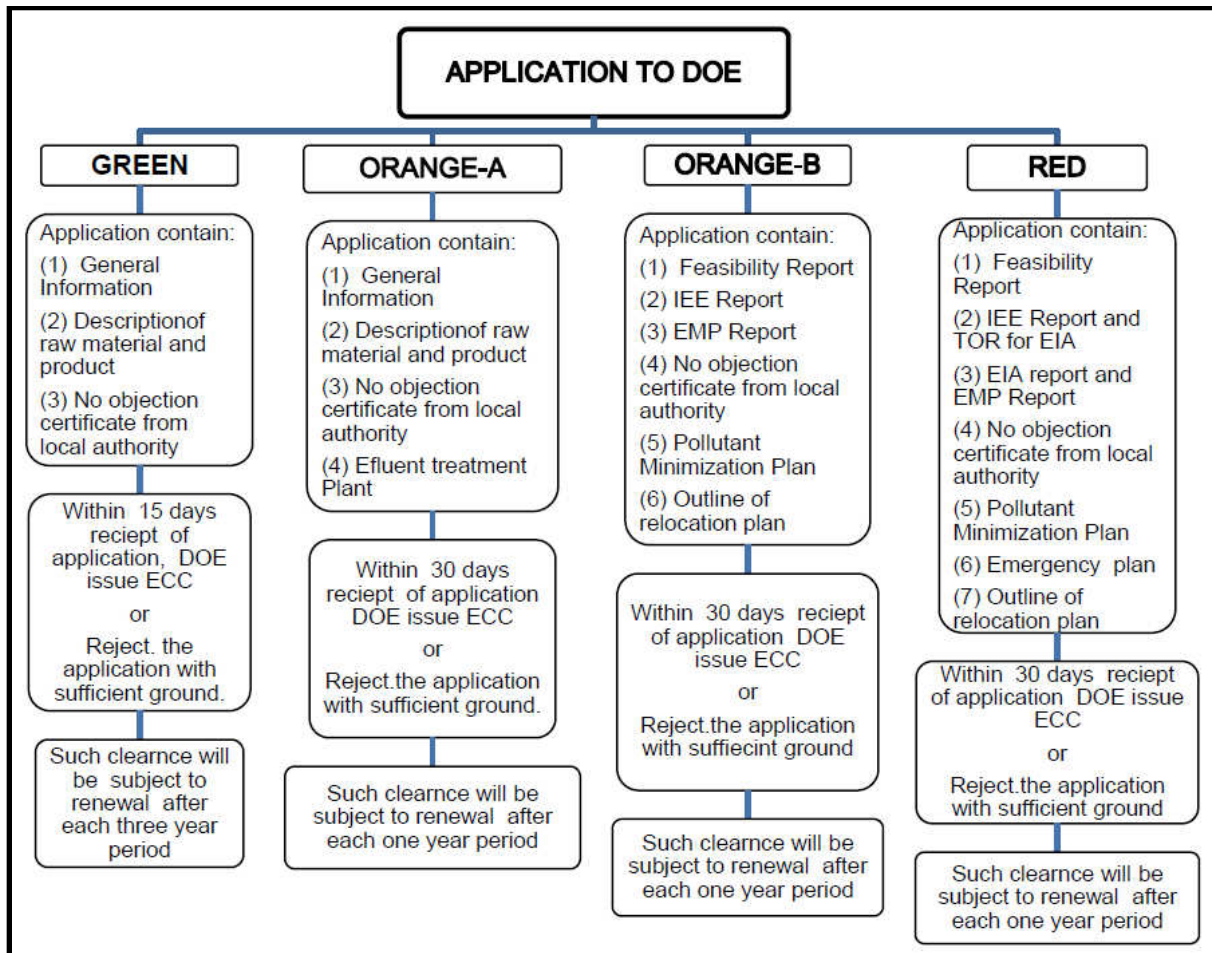

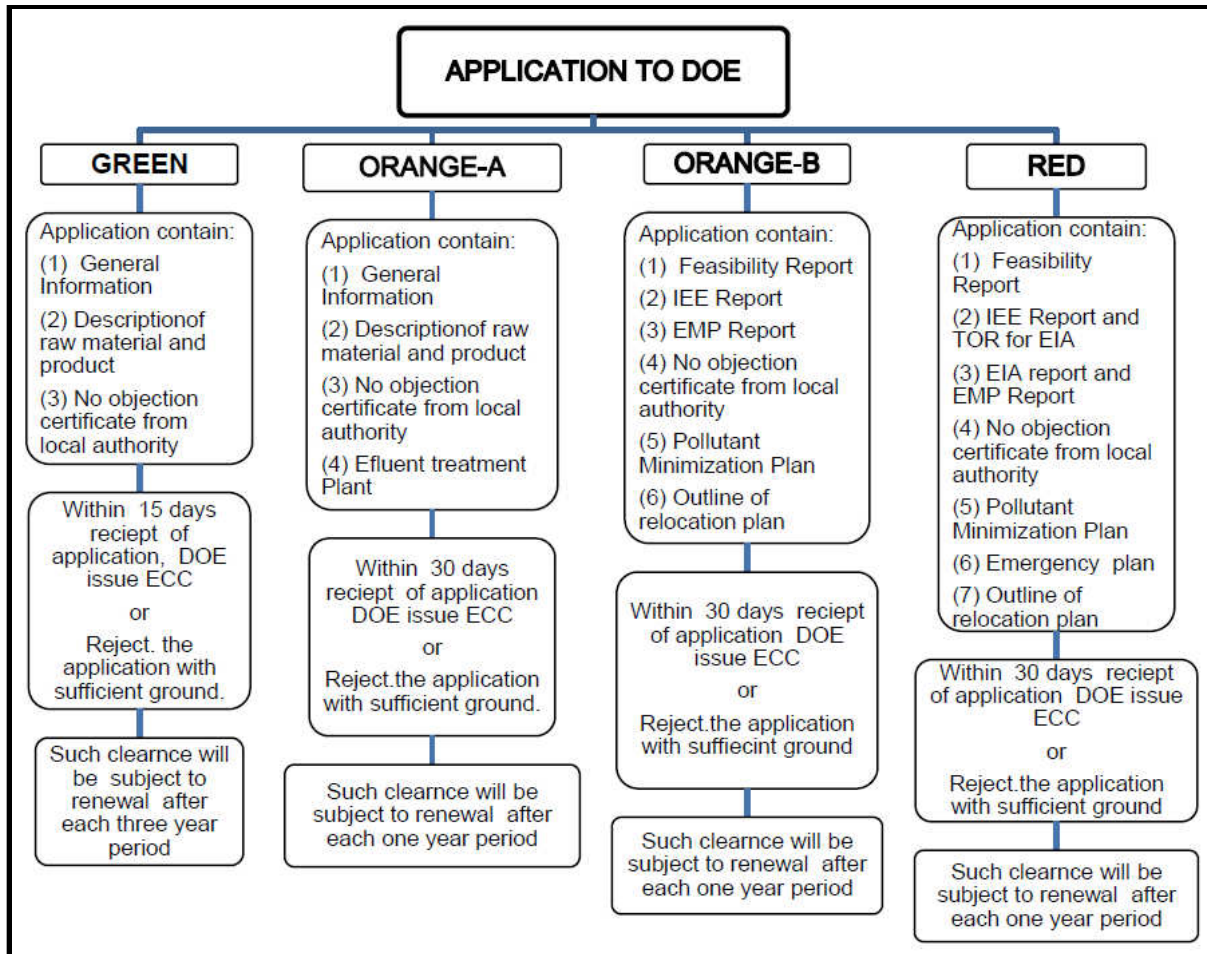

D. Applicable Environmental Standards

32. The ECR, 1997 also provides the environmental standards applicable to . Schedule 2 of the ECR presents the national standards for ambient air quality and Schedule 4 of the ECR presents the national standards for ambient noise. Following requirements of ADB SPS, 2009, the subproject shall apply pollution prevention and control technologies and practices consistent with international good practice, as reflected in EHS Guidelines. When the Government regulations differ from these levels and measures, the subproject shall achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific subproject circumstances, LGED through PMCU will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS, 2009. and . In view of this, **Table 3** & **Table 4** show the ambient air quality standards and noise level standards to be followed by the subproject.

Table 3: Ambient Air Quality Standards

Parameter	Location	Bangladesh Ambient Air Quality Standard ($\mu\text{g}/\text{m}^3$) ^a	WHO Air Quality Guidelines ($\mu\text{g}/\text{m}^3$)		Applicable to Subproject Per ADB Safeguard Policy Statement ^d ($\mu\text{g}/\text{m}^3$)
			Global Update ^b 2005	Second Edition ^c 2000	
TSP	Industrial and Mixed	500	-	-	500
	Commercial and Mixed	400			400
	Residential and Rural	200			200
	Sensitive	100	-	-	100
PM ₁₀	Industrial and Mixed	-	50 (24-h)	-	50 (24-h)
	Commercial and Mixed	-	50 (24-h)		50 (24-h)
	Residential and Rural	-	50 (24-h)		50 (24-h)
	Sensitive	-	50 (24-h)	-	50 (24-h)
PM _{2.5}	Industrial and Mixed	-	25 (24-h)	-	25 (24-h)
	Commercial and Mixed	-	25 (24-h)		25 (24-h)
	Residential and Rural	-	25 (24-h)		25 (24-h)
	Sensitive	-	25 (24-h)	-	25 (24-h)
SO ₂	Industrial and Mixed	120	20 (24-h)	-	20 (24-h)
	Commercial and Mixed	100	20 (24-h)	-	20 (24-h)
	Residential and Rural	80	20 (24-h)		20 (24-h)
	Sensitive	30	20 (24-h)	-	20 (24-h)
NO ₂	Industrial and Mixed	100	200 (1-h)	-	100
	Commercial and Mixed	100	200 (1-h)	-	100
	Residential and Rural	80	200 (1-h)		80
	Sensitive	30	200 (1-h)	-	30
CO	Industrial and Mixed	5,000	-	10,000 (8-h) 100,000 (15-min)	5,000
	Commercial and Mixed	5,000	-	10,000 (8-h) 100,000 (15-min)	5,000
	Residential and Rural	2,000	-	10,000 (8-h) 100,000 (15-min)	2,000
	Sensitive	1,000	-	10,000 (8-h) 100,000 (15-min)	1,000

ADB = Asian Development Bank, CO = carbon oxide, h = hour, $\mu\text{g}/\text{m}^3$ = microgram per cubic meter, min = minute, NO₂ = nitrogen dioxide, PM_{2.5} = particulate matter 2.5, PM₁₀ = particulate matter 10, SO₂ = sulfur dioxide, TSP = total suspended particle, WHO = World Health Organization.

^a Schedule 2 of ECR, 1997.

^b IFC World Bank Group. 2007. Environmental, Health and Safety General Guidelines. Washington, D.C.

^c

WHO Regional Office for Europe. 2000. Air Quality Guidelines for Europe,

Second Edition. Copenhagen.

^dIf less stringent levels or measures are appropriate in view of specific project circumstances, PMCU will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS, 2009.

Table 4: Ambient Noise Quality Standards

Receptor/ Source	National Noise Standard Guidelines, 1997 ^a (dB)		WHO Guidelines Value For Noise Levels Measured Out of Doors ^b (One Hour LA ₉₀ in dBA)		Applicable to Subproject Per ADB Safeguard Policy Statement ^c (dBA)	
	Day	Night	07:00 – 22:00	22:00 – 07:00	Day time	Night time
Industrial area	75	70	70	70	70	70
Commercial area	70	60	70	70	70	60
Mixed Area	60	50	55	45	55	45
Residential Area	50	40	55	45	50	40
Silent Zone	45	35	55	45	45	35

^a Schedule 4 of ECR, 1997.

^b World Health Organization . 1999. Guidelines for Community Noise; World Bank Group. 2007. Environmental, Health and Safety General Guidelines. Washington, D.C.

^c If less stringent levels or measures are appropriate in view of specific project circumstances, PMCU will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS, 2009.

E. Other Relevant National Laws

33. The implementation of subprojects proposed under the project will be governed by Government Environmental Acts, Rules, Policies, and Regulations. **Table 5** summarizes the applicable national and local laws, regulations, and standards for environmental assessment and management, including applicable international environmental agreements.

Table 5: Summary of Relevant Government Laws, Regulations, and Environmental Standards

Laws, Regulations, and Standards	Details	Relevance to Subproject
Environmental Court Act, 2000	Enacted to establish environment courts and make rules for protection of environmental pollution. Environment Courts are situated at the District level but Government may by notification in the official Gazette, establish such courts outside the districts. Environment Courts were given power to directly take into cognizance of any offence relating to environmental pollution. Proceeding of this Court will be similar to criminal courts. One important feature of this Act is that it has been given retrospective effect of any crime committed under environment laws and thus any crime previously committed but is not taken before any court can be taken before the Environment Court or any special Magistrate.	Environmental court has been established in Dhaka where the subproject is located. This court has jurisdiction over any subproject-related environmental cases or litigations or complaints elevated to it.
The Pourashava (Municipality) Ordinance of 1977, the City Corporation Ordinances of 1983 and the recently revised unified ordinance for all City Corporations of 14 May 2008 (Local Government Ordinances 16, and 17 of 2008); City Corporation Act 2009, 15	These ordinances have clearly assigned responsibilities to the LGIs to ensure the provision of a wide range of primary and public health services including primary health care, sanitation, water supply, drainage, food and drink, birth and death registration, vector and infectious disease control, etc. for the residents. LGIs have the authority to address all related issues within their legal and administrative mandate.	The subproject aims to help Gazipur Upazila (as the LGI) achieve or fulfill these mandates.

Laws, Regulations, and Standards	Details	Relevance to Subproject
Oct 2009, and; Pourashava Act 2009, 6 Oct 2009.		
National Forestry Policy, 2016	This policy specifically states the following relevant objectives (among many other objectives): (i) to arrest deforestation, and degradation of forest resources, enrich and extend areas under tree cover, through appropriate programs and projects, to ensure that at least 20% of the country comes under tree cover by 2035, with at least a canopy density of 50%; and (ii) to significantly increase tree cover outside state forest, through appropriate mechanisms, in both public and private land including urban areas.	The subproject will have potential tree cutting activities during construction or rehabilitation works. However, the subproject EMP will ensure to implement measures to comply with and support the policy objectives.
Bangladesh Labor Act, 2006	The Bangladesh Labor Act, 2006 provides the guidance of employer's extent of responsibility and workmen's extent of right to get compensation in case of injury by accident while working.	Provides for security and safety of work force during construction period. Compliance with this law will be included in the responsibility of the Contractor.

EMP = environmental management plan, LGI = local government institutions.

F. International Environmental Agreements

34. **Table 6** below lists the relevant international environmental agreements that the government is party to, and their relevance to the subproject.

Table 6: International Environmental Agreements Relevant to Second City Region Development Project

International Environmental Agreement	Year Ratified	Details	Relevance
United Nations Framework Convention on Climate Change (UNFCCC)	1997	Parties to take precautionary measures to anticipate, prevent or minimize the causes of climate change and mitigate its adverse effects.	The subproject is subject to impact of climate change. Engineering designs of the subproject consider climate change impacts, such as flooding and river water level rise. A climate change vulnerability assessment has been conducted for the geographic coverage of the entire Second City Region Development Project (the project), which covers the location of the subproject.
Paris Convention on	1983	Parties to ensure the protection and conservation of the cultural	There is no World Heritage Site within or near any of the

International Environmental Agreement	Year Ratified	Details	Relevance
Protection of the World Cultural and Natural Heritage, 1972		and natural heritage situated on territory of, and primarily belonging to, the State	subproject alignments. However, The road and drainage works may impact undiscovered underground cultural and natural heritage relics during construction phase. The subproject environmental management plan (EMP) ensures measures for chance finds.
Ramsar Convention on Wetlands of International Importance, 1971	1992	Parties to conserve and wisely use wetlands (i.e., maintaining their ecological character) as a contribution towards achieving sustainable development locally and throughout the world	Road and drainage construction works may impact wetlands. The subproject EMP ensures measures are in place to protect significant wetland and prevent draining or filling into the wetlands during construction.
Convention on Biological Diversity, 1992	1997	Parties to require the environmental assessment of projects that are likely to have significant adverse effects on biological diversity with a view of avoiding or minimizing such effects	Biodiversity sites and species not previously identified might be discovered during construction works along the alignments. The subproject EMP ensures measures to protect biodiversity, if any, during construction and post-construction activities.

EMP = environmental management plan, UNFCCC = United Nations Framework Convention on Climate Change.

III. DESCRIPTION OF THE SUBPROJECT

A. Subproject Scope and Components

35. The proposed subproject is a combination of construction and rehabilitation of the following road alignments or components: (i) Road 1: Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway from Ch.0+000 km to Ch.3+910 km (Road ID # ORG2); (ii) Road 2 Ambagh Municipal Road from Dhaka-Tangail Road (Era Filling Station) to Ambagh GP School via Dalai Morh from Ch. 0+000 Km to Ch. 1+745 Km, (Road ID # LRG4); (iii) Road 3: IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and Road from Signboard to Kamarjuri Road from Ch.0+000 km to Ch.2+625 km (ID # LRG6)..Description of road works is presented in **Table 7**. All construction works and improvements will be conducted within existing rights-of-way (ROWS).The road widths along the alignments will be varied at different chainage depending on the available space within the existing ROWs to ensure that no encroachment to private properties.

Table 7: Roadway Improvement Components

Package No.	Road	Description	Length (km/m)	Existing Carriage way Width (m)	Existing Road Width (m)
CRDP-III/LGED/ GCC/Gazipur Sadar/ NCB/2018/W-01	Road-1	Improvement of Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway from Ch.0+000 km to Ch.3+910 km (Road ID # ORG2)	3.910 km	3.0 ~ 5.2	4.3 – 11.4
		i) U-Drain at Ch.1+973 m over a Khal (Size- 1.00m x 1.20m) - to be constructed ii) Box Culvert at Ch.2+161 (size- 2 x 3.0 m x 3.0 m) – in good condition			
	Road-2	Improvement of Ambagh Municipal Road from Dhaka-Tangail Road (Era Filling Station) to Ambagh GP School via Dalai Morh from Ch. 0+000 Km to Ch. 1+745 Km Road. (Road ID # LRG4)	1.745 km	3.3 – 7.0	5.0 – 10.7
		1) Construction of 15.0m Bridge at Ch.0+259 2) Construction of 20.0m Bridge at Ch.0+700			
	Road-3	Improvement Road from IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and Road from Signboard to Kamarjuri Road from Ch.0+000 km to Ch.2+625 km (ID # LRG6)	6.875 km	1.8 ~ 5.5	4.1 – 11.7

B. Existing Condition of Subproject Components

1. Road-1: Shahid Niamat Road starting from BADC Road to TNT Morh at Dhaka-Mymensingh Highway (Road ID # ORG2)

36. The subproject is 3.910 km long, which stretches from BADC road at Dhaka Mymensingh Highway point (starting coordinates of N 24°0'2.67" and E 90°22'59.65) to Shibbari More to

Shimultali Road at Pachim Bilashpur (ending coordinates N24°0'11.57" and E90°24'55.28"). This road passes through villages (Telipara, Teknogopara, Bariali, Mariali, Tekbararia and Pachim Bilashpur), markets or bazars and open agricultural fields. This road stretches along various ponds, ditches and low-lying areas on both sides; and traverses along and crosses khal and canal at two sections. This canal only serves as rainwater conveyance or passageway during monsoon seasons and practically dry grassy ditches during summer seasons.

37. **Road Condition:** The proposed road subproject is an important existing rural or Upazila road that connects the urban and peri-urban areas, and growth centers. This road has varying carriageway width ranging from 3.0 m to 5.2 m in different sections (carriageway widths of 3.0 m from 1+575 to 3+300 m and 5.2 m from Ch 3+425 to 3+725 km). The road condition is varying in different section. Entire portion of the road is bituminous carpet, and most of the road has suffered wear and tear with cracks, pot-holes, broken edges and depressions. The distressed condition of the road is mainly due to improper drainage facilities and movement of heavy vehicular traffic for a long time without any proper maintenance work. There are several sub-standard horizontal curves. **Figure 3** shows some of the existing conditions of this road.

38. **Drains:** There is no functional roadside drain along the alignment of this road, but one U-Drain at Ch.1+973 km which is in poor condition and requires replacement. Currently, rain water during monsoon season flows toward the side of the road which have lower elevation and then flows to nearby canals or ponds. These canals or ponds only serve as rainwater conveyance, passageway, waterlogging areas during monsoon seasons and practically dry grassy ditches or fields during summer seasons.


39. **Structures:** There is a 2-vent box-culvert (size: 3.0 m x 3.0 m) at Ch. 2+126 km for cross drainage purpose, The box culvert is in good condition.

40. **Existing Alignment and Rights-of-Way.** The subproject road is 2-lane road, and it will be improved within existing alignment RoW. The existing road width is varying between 4.3~11.4 m and the carriageway between 3.0~5.2 m. The proposed road width shall vary between 4.3~7.3 m and will include carriageway of which width varies between 3.0~4.5 m. The side slope of road embankment will be of 1:1.5. From field investigation, no tree is found along the proposed carriageway. No trees will be cut and all trees found along the sides of the proposed carriageway will be preserved per detailed design.

41. **Strip Map.** The strip map showing the locations of the structures along this alignment is in **Appendix 3**. The strip map was drawn as a result of the field surveys conducted along the alignment and show that no physical cultural resources will be encroached or affected.

42. **GIS Map.** The GIS map site photographs of Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway road are displayed here below to exhibit the environmental attributes alongside the road.

GIS maps showing Environmental Features around the existing Road sides

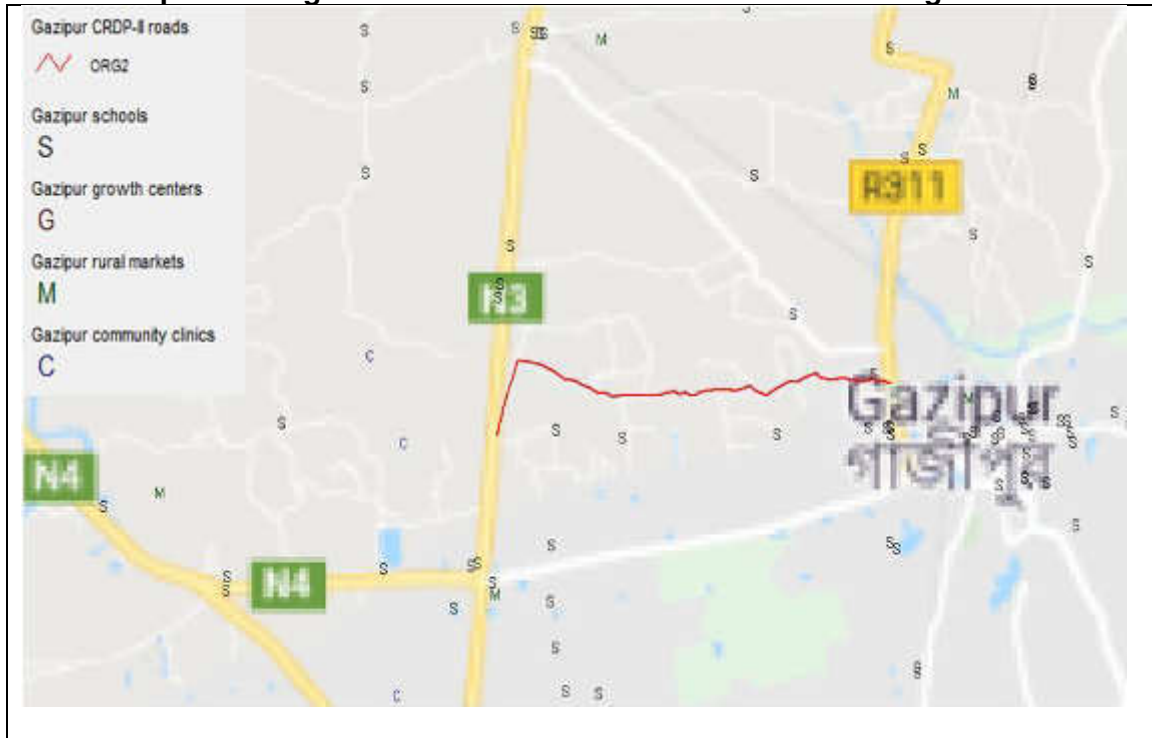

Location of schools, commercial areas, community clinics, streams and canals

43. As regards the Environmental Features, namely school, growth centre, market, community clinic etc. around the existing road alignment of Ambagh Municipal Road, GIS map shows that there are no such environmental features are found to exist at the close vicinity of the road alignment. There are only 5 (five) schools which are not within the 50 meter (core zone) area on both sides of the road. Hence no environmental impact issue is envisaged due to the above mentioned environmental attributes.

Figure 3: Site Photographs from Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka -Mymensingh Highway road





Existing Road at Pachim Bilashpur



Existing Bridge at Bariali

2. Road-2: Ambagh Municipal Road from Era Filling Station on Road Dhaka-Tangail to Ambagh GP School via Dalai Morh (Road ID # LRG 4)

45. The subproject is 1.745 km long, which stretches from Era Filling Station on Dhaka-Tangail Highway Road (starting coordinates of N 24°0'42.43" and E 90°18'57.43") to Ambagh GP School via Dalai Morh (ending coordinates N 24°1'5.31" and E 90°19'15.54"). This road passes through different mahallas of Ambagh village covering dense areas of small industries, markets and homesteads.

44. **Road Condition:** The proposed road subproject is an important existing upazila road that connects the urban/peri-urban areas and growth centers. This road is of varying carriageway width ranging from 3.5 m to 7.0 m in different sections. The road condition is varying in different section. Entire portion of the road is BC (bituminous carpeting), and most of the road has suffered wear and tear with cracks, pot-holes, broken edges and depressions. The distressed condition of the road is due to mainly improper drainage facilities and movement of heavy vehicular traffic for a long time without any proper maintenance work. There are several sub-standard horizontal curves. **Figure 4** shows some of the existing conditions of this road.

45. **Drains:** There is no functional roadside drain along the alignment of the road. Noted water logging in different segments of the road and the adjacent areas which indicate the necessity of the proposed pipe drains in few segments.


46. **Drainage Structures:** There is a 12 m RCC Girder Bridge at Ch.0+259 km which is in poor condition and its replacement with 15 m Bridge has proposed. Additionally, a 20 m Bridge at Ch.0+700 km has been proposed for the cross drainage of the area.

47. **Existing Alignment and Rights-of-Way.** The subproject road is 2-lane road, and it will be improved within existing alignment RoW. The existing road width is varying between 5.0~10.7 m and the carriageway between 3.3~7.0 m. The road width varies between 5.0~7.3 m and will include carriageway of which width varies between 3.7~ 5.5 m. The side slope of road embankment will be of 1:1.5. From field investigation, no tree is found along the proposed carriageway. No trees will be cut and all trees found along the sides of the proposed carriageway will be preserved per detailed design.

48. **Strip Map.** The strip map showing the locations of the structures along this alignment is in **Appendix 4**. The strip map was drawn as a result of the field surveys conducted along the alignment and show that no physical cultural resources will be encroached or affected.

49. **GIS Map.** The GIS map of Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh road is displayed here below to exhibit the environmental attributes alongside the road.


GIS maps showing Environmental Features around the existing Road sides

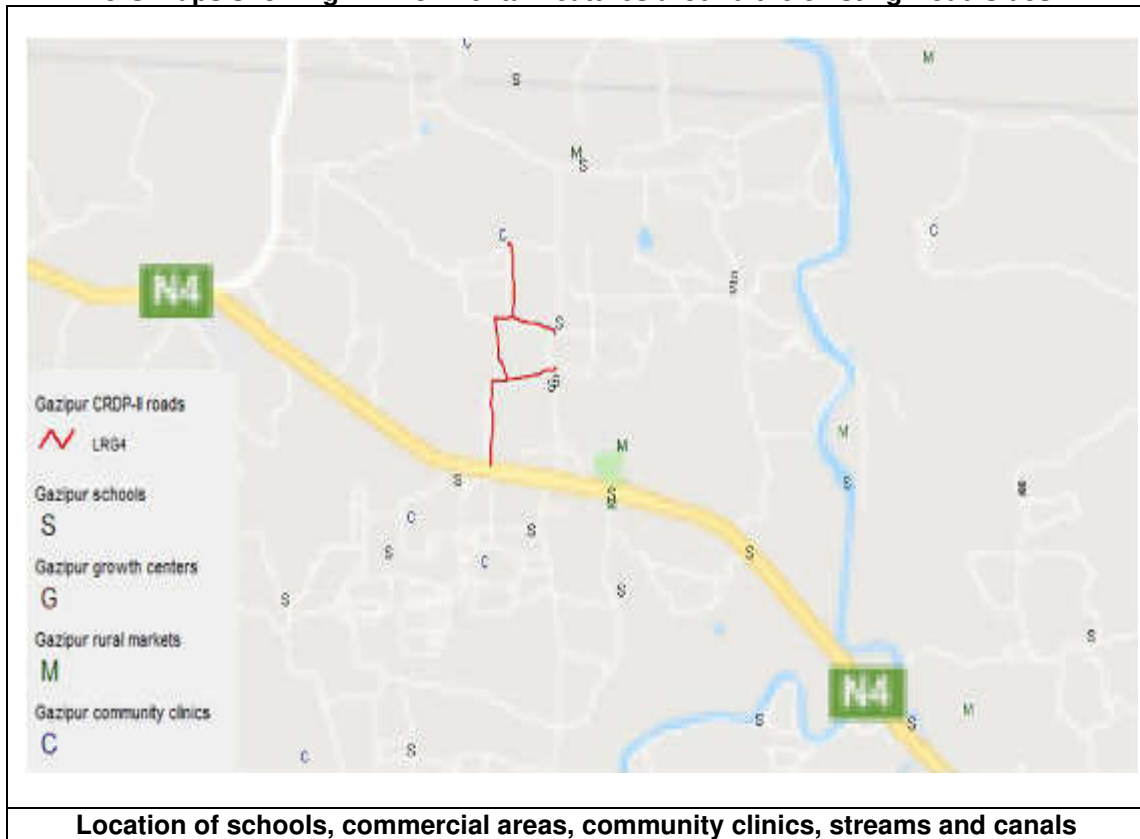

As regards the Environmental Features, namely school, growth centre, market, community clinic etc. around the existing road alignment of Ambagh Municipal Road, GIS map shows that there are no such environmental features are found to exist at the close vicinity of the road alignment. There are only 3 (three) schools and 1 (one) community clinic alongside the road alignment which are not within the 50 meter (core zone) area on both sides of the road. Hence no environmental impact issue is envisaged due to the above mentioned environmental attributes.

Figure 4: Site Photographs from Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh road



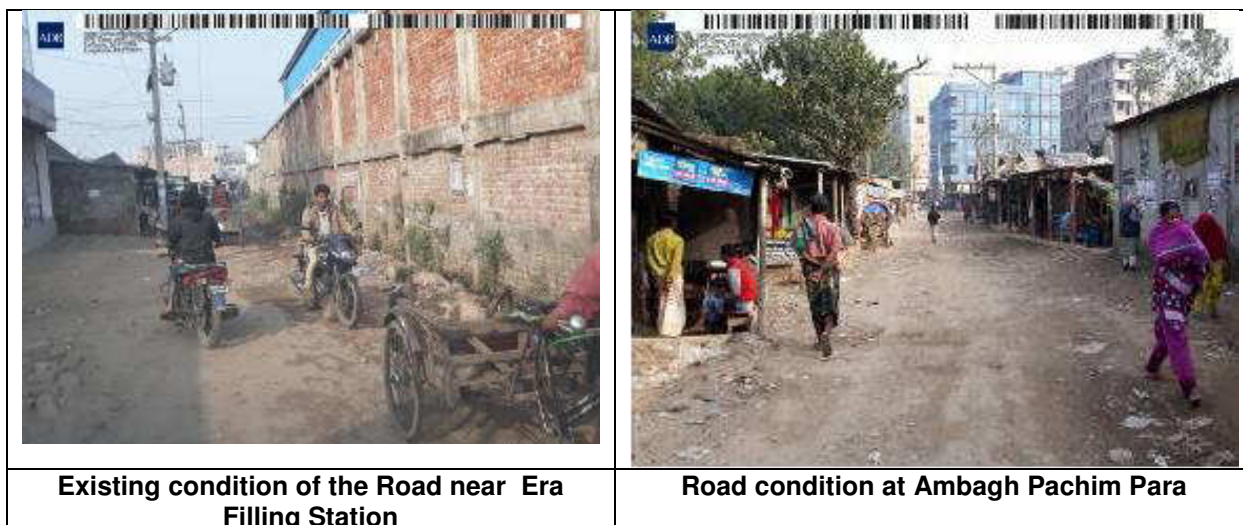

3. Road-3: IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and 2.625 km long Signboard to Kamarjuri road (Road ID # LRG6)

50. The total length of the subproject road is 6.875 km, which stretches 4.050 km from IUT to Icharkandi road plus 0.200 km link road (starting coordinates of N 23°56'48.99" and E 90°22'54.69") and ends at Turag River point (ending coordinates N 23°56'36.79" and E 90°20'51.32"). Another stretch of 2.625 km Signboard to Kamarjuri road starts from Dhaka-Mymensingh Highway at point, (starting coordinates of N 23°95'36.21" and E 90°38'11.52") and ends at a point on IUT to Icharkandi road (ending coordinates N 23°56'55.68"; E90°21'37.89"). This road subproject passes through homesteads, big and small bazaars paddy lands and wetlands. The localities it passes through are IUT, Kalmeshor, Kathora, Kamarjuri, Ichorkandi and Bathe Kalmeshor. Besides there are bazars, low-lying agricultural or open fields sporadically scattered, rural/urban residential settlements and some low-lying ditches/ponds on both sides of the road alignment. The ditches only serve as rainwater conveyance or passageway during monsoon seasons and practically dry grassy areas during summer seasons. Likewise, the ponds are only rainwater containment ponds during monsoon seasons and practically grassy or dry open fields during summer seasons.

51. **Road Condition:** The proposed road subproject is an important existing rural/upazila road that connects the urban/peri-urban areas and growth centers. The road has varying carriageway width ranging from 1.8 ~5.5 m in different sections (carriageway width 2.3 m is from Ch 0+000 - 0+200 km(Link-01) and 3.7 - 5.5 m width is from Ch 0+000 - 0+725 km). The road condition is varying at different sections. Entire portion of the road is bituminous carpet except a section of 1.1 km brick solling (from Ch.3+125 – 4+250 km); and most part of the road has suffered wear and tear with cracks, pot-holes, broken edges and depressions. The distressed condition of the road is mainly due to poor drainage system and movement of heavy vehicular traffic for a long time without any proper maintenance work. There are several sub-standard horizontal curves. **Figure 5** shows some of the existing conditions of this road.

52. **Drains:** There is a drain at Kamarjuri from chainage 0+ 725 to chainage 1+ 100 km, but not functioning well. At other sections of road there is no functional roadside drain along the existing alignment of the above mentioned road. There are water logging in different segments of the roads and the adjacent areas which indicate the necessity of the proposed pipe drains in few segments.


53. **Drainage Structures:** There are 2 (two) RCC Girder Bridges of lengths 12.0 m and 7.5 m at Ch. 0+894 and 2+161 km respectively, also there are 2 (two) Box culverts of sizes 5.0 m x 5.0 m and 2 x 4.50 m x 4.50 m at Ch. 0+727 km and 2+652 km respectively; and all these structures are in poor condition and require replacement.

54. **Existing Alignment and Rights-of-Way.** The subproject road is 2-lane road, and it will be improved within existing alignment/RoW. The existing road width is varying between 4.1~11.7 m and the carriageway between 1.8~5.5 m. The road width is varying in between 4.1~7.3 m and will include carriageway of which width will vary between 3.0~ 5.5 m. The side slope of road embankment will be of 1:1.5. From field investigation, no tree is found along the proposed carriageway. No trees will be cut and all trees found along the sides of the proposed carriageway will be preserved per detailed design.

55. **Strip Map.** The strip map showing the locations of the structures along this alignment is in **Appendix 5**. The strip map was drawn as a result of the field surveys conducted along the alignment and show that no physical cultural resources will be encroached or affected.

56. **GIS Map.** The GIS map of IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and 2.625 km long Signboard to Kamarjuri road are displayed here below to exhibit the environmental attributes alongside the road

GIS maps showing Environmental Features around the existing subproject Road

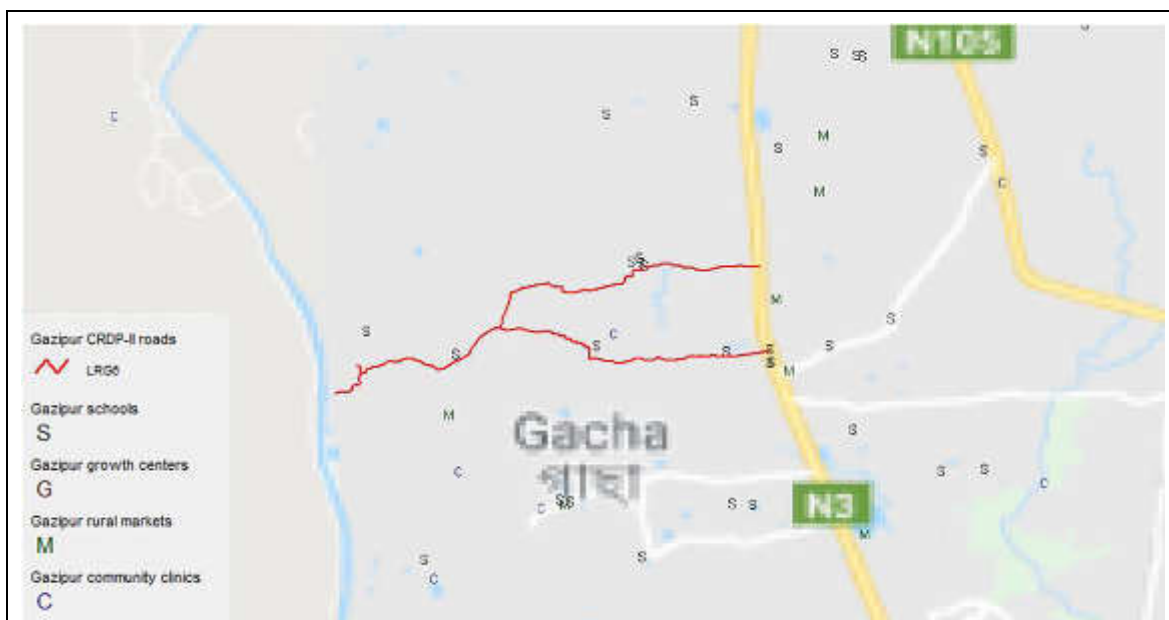




Location of schools, commercial areas, community clinics, streams and canals

57. As regards the Environmental Features, namely school, growth centre, market, community clinic etc. around the existing road alignment of IUT to Icharkandi Road including Link Road and Signboard to Kamarjuri road, GIS map shows that there are no such environmental features are found to exist at the close vicinity of the road alignment. There are only 7 (seven) schools and 1 (one) community clinic alongside the road alignment which are not within the 50 meter (core zone) area on both sides of the road. Hence no environmental impact issue is envisaged due to the above mentioned environmental attributes.

Figure 5: Site Site Photographs from IUT to Icharkandi Road including Link Road and Signboard to Kamarjuri road

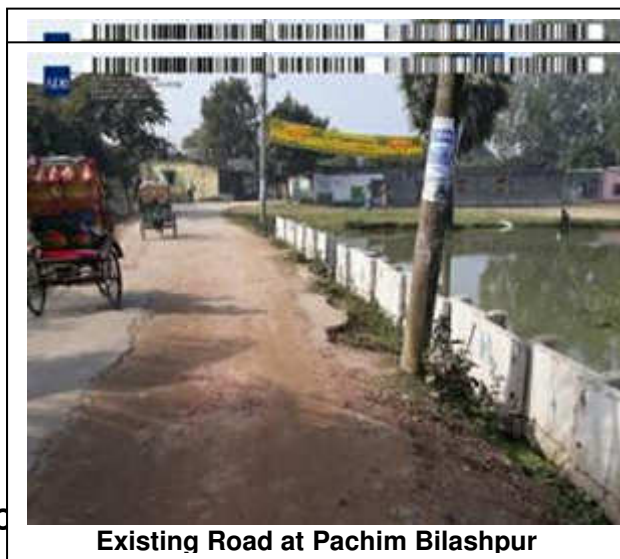

Existing Road at Pachim Bilashpur



Existing Bridge at Bariali

Road-1: Improvement of Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway from Ch.0+000 km to Ch.3+910 km (Road ID # ORG2)

58. Proposed interventions planned for the Existing Road (ID No. ORG2) Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway from Ch.0+000 km to Ch.3+910 km are as follows:

- (i) Improvement of the existing 2-lane road, including footpath on both sides of the road within the ROW;
- (ii) Reconstruction and replacement of the existing U-Drain;
- (iii) Pavement works comprising construction of sub-grade, sub-base, base binder course and wearing course;
- (iv) Road improvement based on design that considers road safety requirement per LGED published guidelines and standards. This includes planning of cross section, bus and truck stand; and
- (v) Protection works (pallisading) to be undertaken at locations where ditches and ponds adjacent to the road embankment are found. These will protect road edges from being eroded or sliding. Locations and lengths of proposed protection works at different sections are shown in Table 8 below.

Table 8: Locations and Lengths of Proposed Protection Works Along Shahid Niamat Road (Road ID # ORG2)

Sl.no	Left side Chainage and Length	Right side Chainage and Length
1	1+200 - 1+235 (35 m)	1+355 - 1+375 (20 m)
2	1+420 - 1+450 (30 m)	2+030 - 2+055 (25 m)
3	3+225 - 3+245 (20 m)	2+060 - 2+090 (30 m)
Total length	85 m	75 m

59. The existing status with proposed development interventions of this road component is summarized in Error! Reference source not found..


Table 9: Summary of Improvement Works for Shahid Niamat Road (Road ID # ORG2)

Road/Drainage Improvement Components	Length to be Improved (km)	Chainage (m)	Present condition	Existing/Proposed Carriageway Width (m)	Existing/Proposed Road Width (m)	Proposed Development
Road (1) Improvement of Road Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway from Ch.0+000 km to Ch.3+910 km (Road ID # ORG2)	3.910	0+000 - 1+575	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	4.0~5.0 / 4.5	5.8~9.1/5.8 ~ 6.7 (include hard shoulder of width .075 ~ 1.000 m hard shoulder on both side of the pavement)	100 mm CC & 200mm RCC pavement on existing BC road 750-1000mm interlocking Uni-block shoulders both side
		1+575 - 2+450	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	3.0~3.3 / 3.0	5.5~7.8/5.5~7.3 (include hard shoulder of width 1250 mm hard shoulder & 675 mm soft shoulders both side of the pavement)	200mm RCC pavement on existing BC road 1250mm interlocking Uni-block shoulders & 800 mm soft shoulders both side
		2+450 - 3+3300	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	3.0~3.8 / 3.0	4.3~8.6/4.3~7.3 (include hard shoulder of width 1.250 m hard shoulder & 0.800 m soft shoulders both side of the pavement)	150 mm WBM & 40mm asphalt wearing course on existing BC road. 1250mm interlocking Uni-block shoulders & 675 mm soft shoulders both side
		3+300 - 3+425 3+725 - 3+910	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	3.3~3.8 / 3.7	7.0~11.4/6.0~7.3 (include hard shoulder of width 1150~2150 mm hard shoulder & 1500 mm cc footpaths both side of the pavement)	200mm RCC pavement on existing BC road including 1150~2150 mm hard shoulder & 1500 mm cc footpaths on both side of the pavement.

Road/Drainage Improvement Components	Length to be Improved (km)	Chainage (m)	Present condition	Existing/Proposed Carriageway Width (m)	Existing/Proposed Road Width (m)	Proposed Development
		3+425 - 3+725		3.6~5,2 / 3.7	6.5~11.3/6.0~7.3 (include hard shoulder of width 1150~2150 mm hard shoulder & 1500 mm cc footpaths both side of the pavement)	200mm RCC pavement on 250 mm compacted sand improved sub grade. 1150~2150 mm hard shoulder & 1500 mm cc footpaths on both side of the pavement.
<u>Drain</u> Construction of drain on both sides of the subproject road at Ch.0+000- 2+125 km	2.125	a) 0+000 - 0+600 b) 0+600 - 1+075 c) 1+075 - 1+800 d) 1+800 - 2+125	There is no functional drain		<u>RCC pipe drain</u> a) 1000 mm dia b) 1200 mm dia c) 1400 mm dia d) 1600 mm dia	Drain proposed under the road carriageway with drain pit and catchment

The typical section for the roadway design considerations with their cross-sections are shown in **Figures 6, 7, 8 and 9.**

Figure 6: Typical cross section (Ch. 0+000 to 1+575 km)

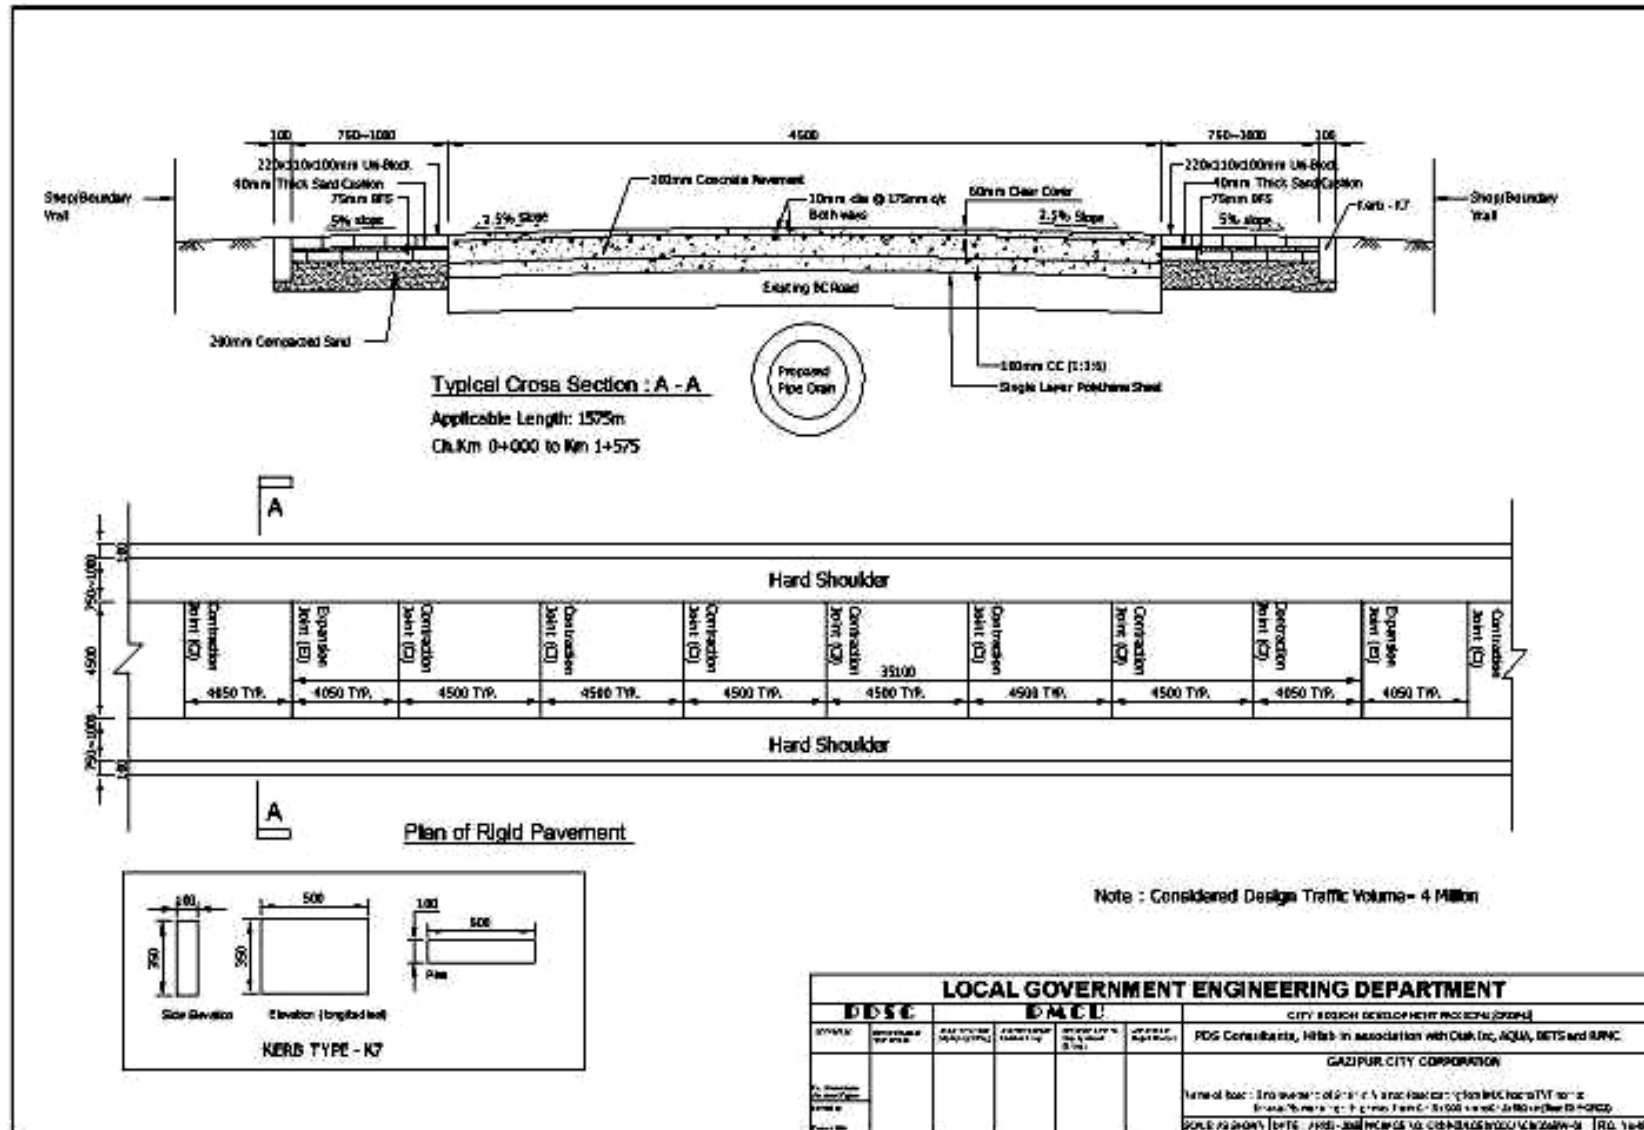





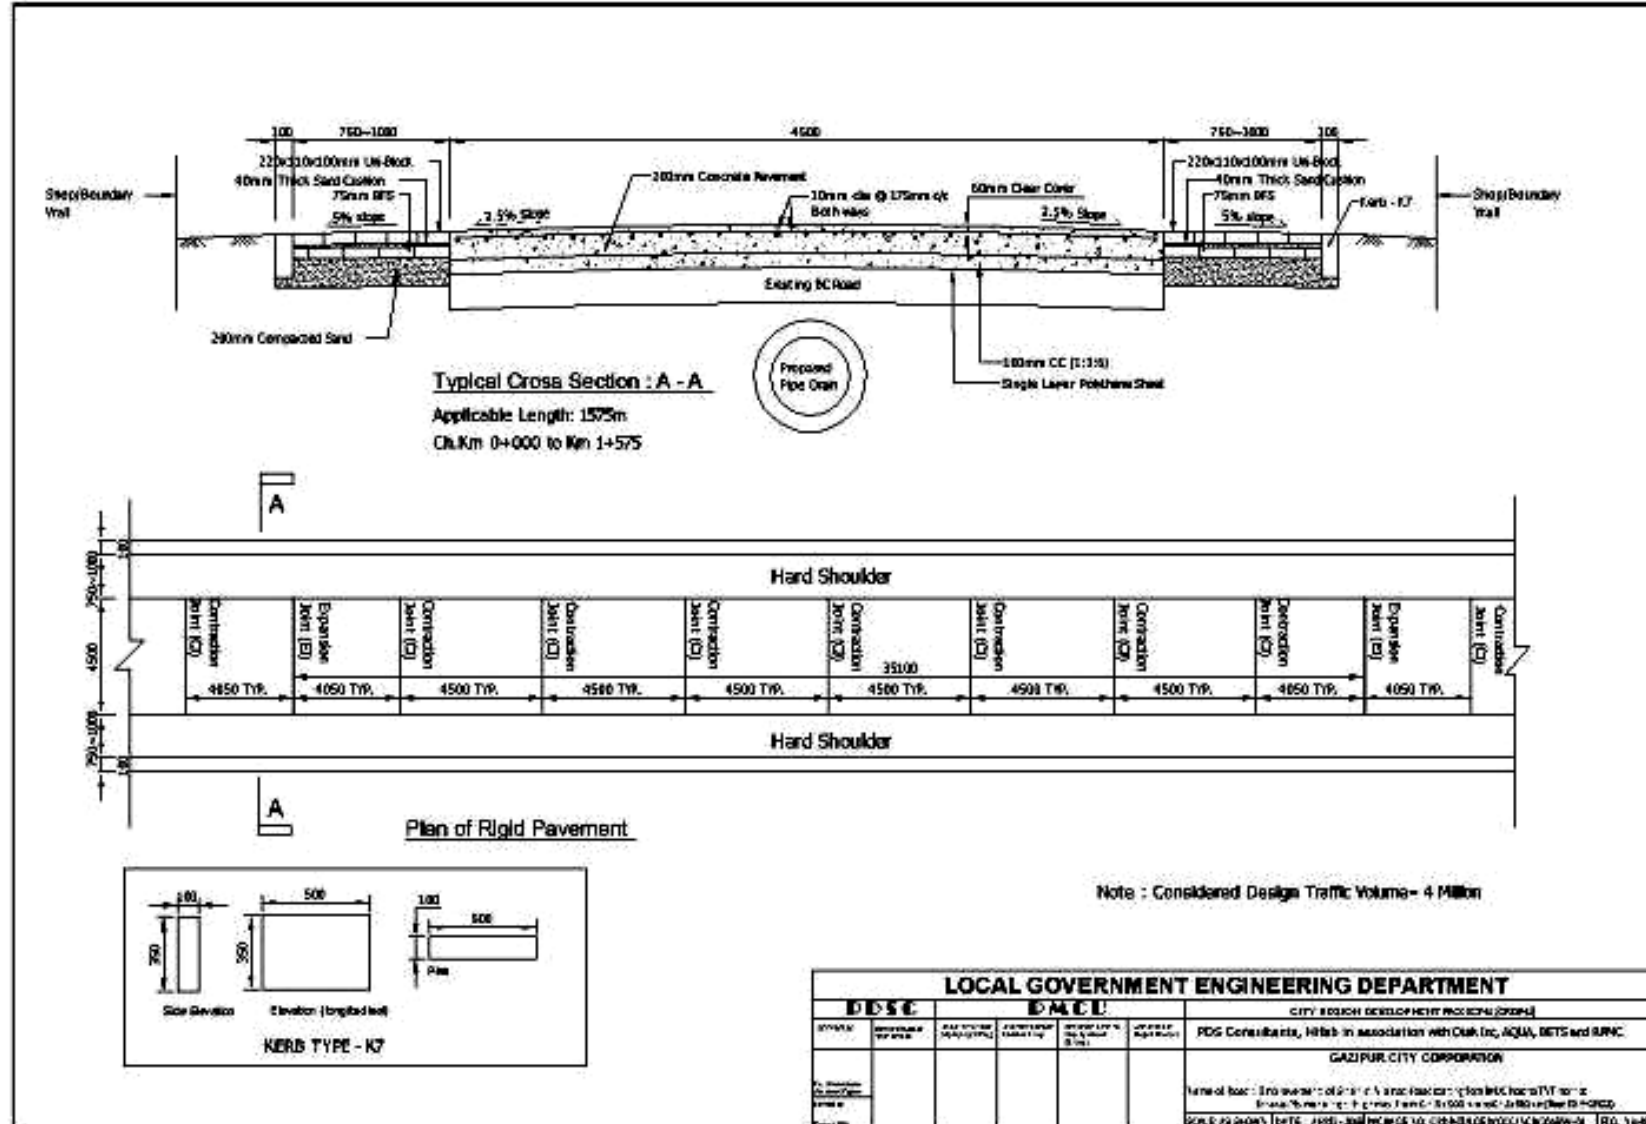


Figure 7: Typical cross section (Ch. 1+575 to 2+450 km & Ch. 2+450 to 3+330 km)

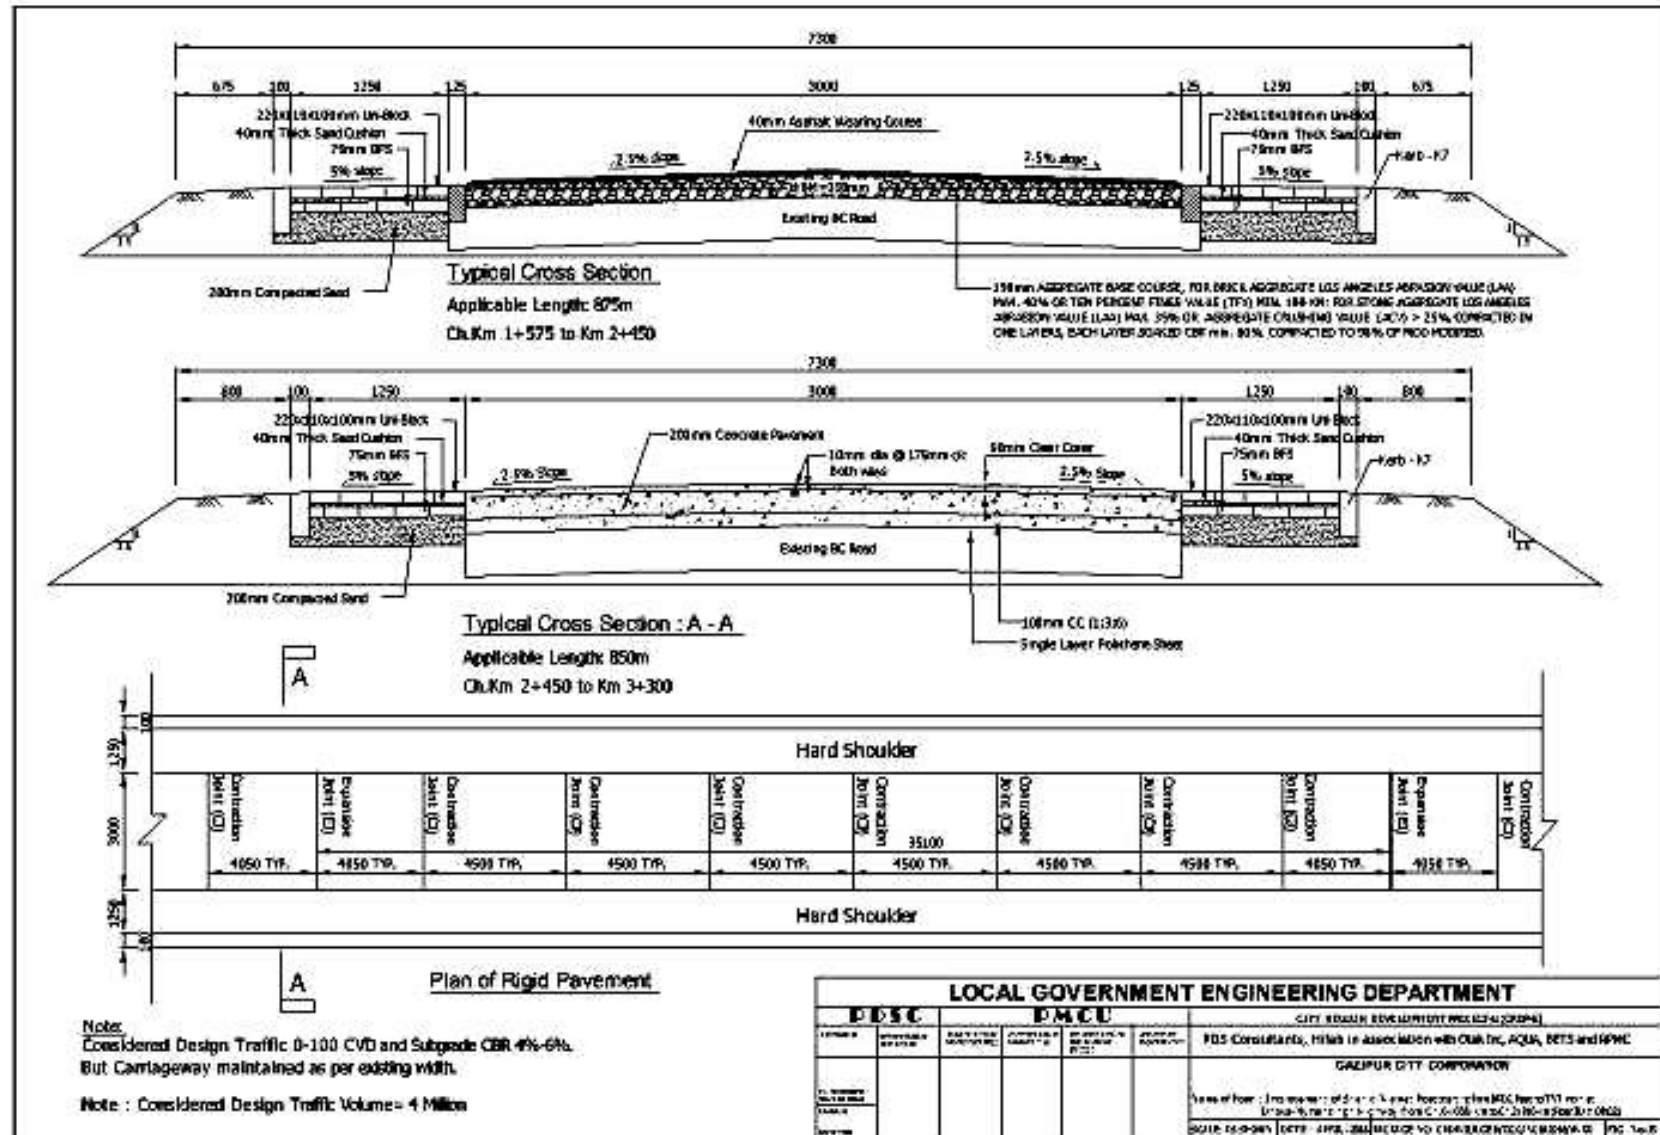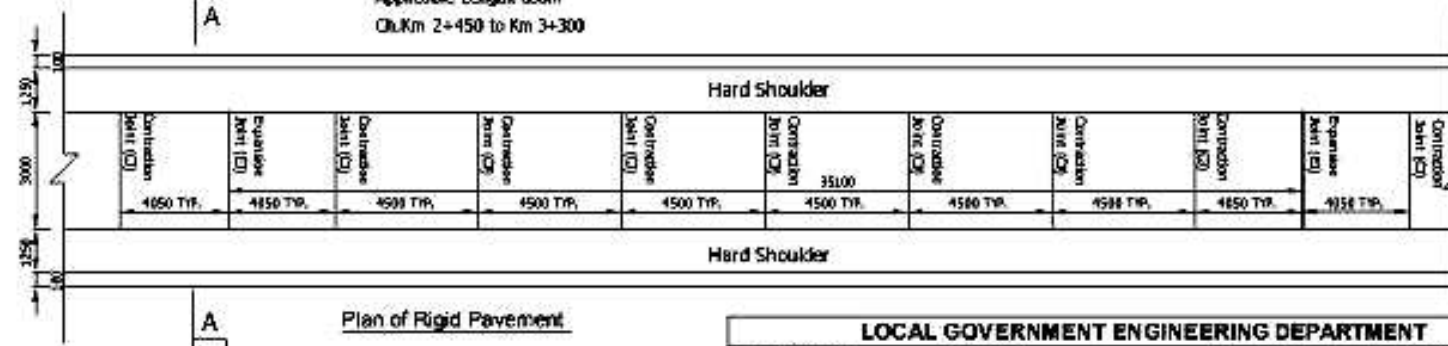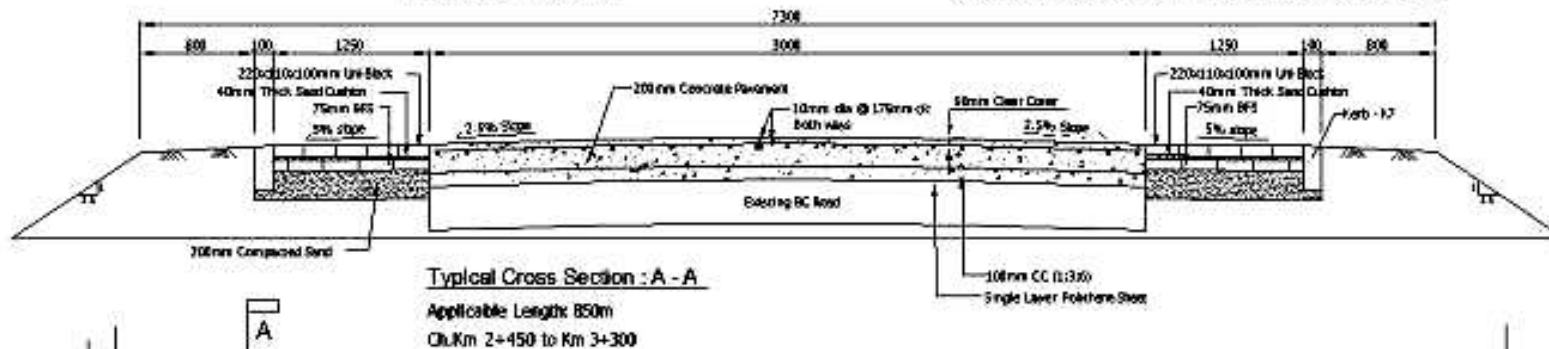

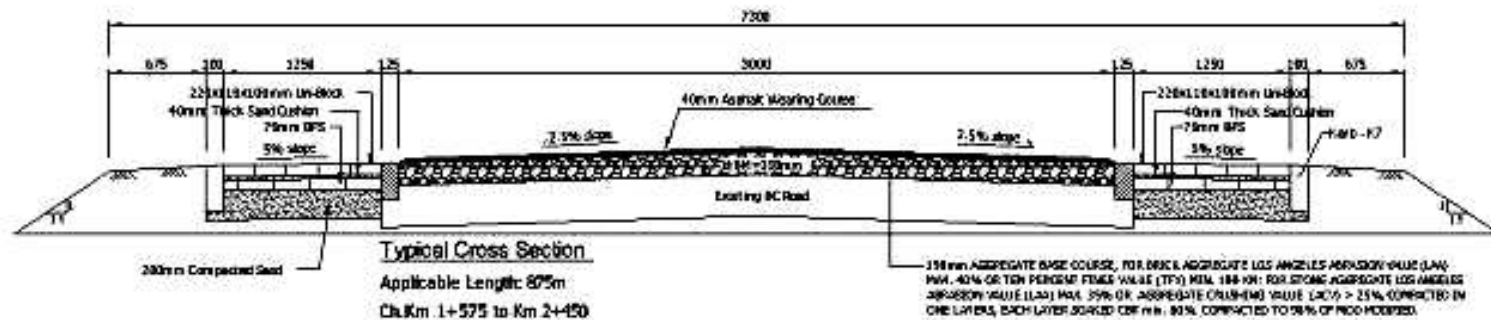

Note:
Considered Design Traffic 0-100 CVD and Subgrade CBR 4%-6%.
But Carriageway maintained as per existing width.

Note : Considered Design Traffic Volume= 4 Million




LOCAL GOVERNMENT ENGINEERING DEPARTMENT					
PDS			PMU		
Sl. No.	Project Name	Project Location	Project Status	Project Value	Project Date
1
2
3
4
5
6
7
8
9
10

Typical Cross Section : A - A
 Applicable Length: 310m
 Ch.Km 3+300 to Km 3+425
 Ch.Km 3+725 to Km 3+910

Plan of Rigid Pavement

Note : Considered Design Traffic Volume = 4 Million




LOCAL GOVERNMENT ENGINEERING DEPARTMENT
D.M.C.
D.M.C.
 CITY REGION DEVELOPMENT PROJECT (SR-02)
 POS Consultants, I/Fair in association with DCM Inc, AQUA, BETS and RPMC
GADPUR CITY CORPORATION
 Name of the Project: Improvement of G.P. A. and B. and C. and D. and E. and F. and G. and H. and I. and J. and K. and L. and M. and N. and O. and P. and Q. and R. and S. and T. and U. and V. and W. and X. and Y. and Z. and AA. and AB. and AC. and AD. and AE. and AF. and AG. and AH. and AI. and AJ. and AK. and AL. and AM. and AN. and AO. and AP. and AQ. and AR. and AS. and AT. and AU. and AV. and AW. and AX. and AY. and AZ. and BA. and BB. and BC. and BD. and BE. and BF. and BG. and BH. and BI. and BJ. and BK. and BL. and BM. and BN. and BO. and BP. and BQ. and BR. and BS. and BT. and BU. and BV. and BW. and BX. and BY. and BZ. and CA. and CB. and CC. and CD. and CE. and CF. and CG. and CH. and CI. and CJ. and CK. and CL. and CM. and CN. and CO. and CP. and CQ. and CR. and CS. and CT. and CU. and CV. and CW. and CX. and CY. and CZ. and DA. and DB. and DC. and DD. and DE. and DF. and DG. and DH. and DI. and DJ. and DK. and DL. and DM. and DN. and DO. and DP. and DQ. and DR. and DS. and DT. and DU. and DV. and DW. and DX. and DY. and DZ. and EA. and EB. and EC. and ED. and EE. and EF. and EG. and EH. and EI. and EJ. and EK. and EL. and EM. and EN. and EO. and EP. and EQ. and ER. and ES. and ET. and EU. and EV. and EW. and EX. and EY. and EZ. and FA. and FB. and FC. and FD. and FE. and FF. and FG. and FH. and FI. and FJ. and FK. and FL. and FM. and FN. and FO. and FP. and FQ. and FR. and FS. and FT. and FU. and FV. and FW. and FX. and FY. and FZ. and GA. and GB. and GC. and GD. and GE. and GF. and GG. and GH. and GI. and GJ. and GK. and GL. and GM. and GN. and GO. and GP. and GQ. and GR. and GS. and GT. and GU. and GV. and GW. and GX. and GY. and GZ. and HA. and HB. and HC. and HD. and HE. and HF. and HG. and HH. and HI. and HJ. and HK. and HL. and HM. and HN. and HO. and HP. and HQ. and HR. and HS. and HT. and HU. and HV. and HW. and HX. and HY. and HZ. and IA. and IB. and IC. and ID. and IE. and IF. and IG. and IH. and II. and IJ. and IK. and IL. and IM. and IN. and IO. and IP. and IQ. and IR. and IS. and IT. and IU. and IV. and IW. and IX. and IY. and IZ. and JA. and JB. and JC. and JD. and JE. and JF. and JG. and JH. and JI. and JJ. and JK. and JL. and JM. and JN. and JO. and JP. and JQ. and JR. and JS. and JT. and JU. and JV. and JW. and JX. and JY. and JZ. and KA. and KB. and KC. and KD. and KE. and KF. and KG. and KH. and KI. and KJ. and KK. and KL. and KM. and KN. and KO. and KP. and KQ. and KR. and KS. and KT. and KU. and KV. and KW. and KX. and KY. and KZ. and LA. and LB. and LC. and LD. and LE. and LF. and LG. and LH. and LI. and LJ. and LK. and LL. and LM. and LN. and LO. and LP. and LQ. and LR. and LS. and LT. and LU. and LV. and LW. and LX. and LY. and LZ. and MA. and MB. and MC. and MD. and ME. and MF. and MG. and MH. and MI. and MJ. and MK. and ML. and MM. and MN. and MO. and MP. and MQ. and MR. and MS. and MT. and MU. and MV. and MW. and MX. and MY. and MZ. and NA. and NB. and NC. and ND. and NE. and NF. and NG. and NH. and NI. and NJ. and NK. and NL. and NM. and NN. and NO. and NP. and NQ. and NR. and NS. and NT. and NU. and NV. and NW. and NX. and NY. and NZ. and OA. and OB. and OC. and OD. and OE. and OF. and OG. and OH. and OI. and OJ. and OK. and OL. and OM. and ON. and OO. and OP. and OQ. and OR. and OS. and OT. and OU. and OV. and OW. and OX. and OY. and OZ. and PA. and PB. and PC. and PD. and PE. and PF. and PG. and PH. and PI. and PJ. and PK. and PL. and PM. and PN. and PO. and PP. and PQ. and PR. and PS. and PT. and PU. and PV. and PW. and PX. and PY. and PZ. and QA. and QB. and QC. and QD. and QE. and QF. and QG. and QH. and QI. and QJ. and QK. and QL. and QM. and QN. and QO. and QP. and QQ. and QR. and QS. and QT. and QU. and QV. and QW. and QX. and QY. and QZ. and RA. and RB. and RC. and RD. and RE. and RF. and RG. and RH. and RI. and RJ. and RK. and RL. and RM. and RN. and RO. and RP. and RQ. and RR. and RS. and RT. and RU. and RV. and RW. and RX. and RY. and RZ. and SA. and SB. and SC. and SD. and SE. and SF. and SG. and SH. and SI. and SJ. and SK. and SL. and SM. and SN. and SO. and SP. and SQ. and SR. and SS. and ST. and SU. and SV. and SW. and SX. and SY. and SZ. and TA. and TB. and TC. and TD. and TE. and TF. and TG. and TH. and TI. and TJ. and TK. and TL. and TM. and TN. and TO. and TP. and TQ. and TR. and TS. and TT. and TU. and TV. and TW. and TX. and TY. and TZ. and UA. and UB. and UC. and UD. and UE. and UF. and UG. and UH. and UI. and UJ. and UK. and UL. and UM. and UN. and UO. and UP. and UQ. and UR. and US. and UT. and UY. and UZ. and VA. and VB. and VC. and VD. and VE. and VF. and VG. and VH. and VI. and VJ. and VK. and VL. and VM. and VN. and VO. and VP. and VQ. and VR. and VS. and VT. and VU. and VV. and VW. and VX. and VY. and VZ. and WA. and WB. and WC. and WD. and WE. and WF. and WG. and WH. and WI. and WJ. and WK. and WL. and WM. and WN. and WO. and WP. and WQ. and WR. and WS. and WT. and WU. and WV. and WW. and WX. and WY. and WZ. and XA. and XB. and XC. and XD. and XE. and XF. and XG. and XH. and XI. and XJ. and XK. and XL. and XM. and XN. and XO. and XP. and XQ. and XR. and XS. and XT. and XU. and XV. and XW. and XX. and XY. and XZ. and YA. and YB. and YC. and YD. and YE. and YF. and YG. and YH. and YI. and YJ. and YK. and YL. and YM. and YN. and YO. and YP. and YQ. and YR. and YS. and YT. and YU. and YV. and YW. and YX. and YY. and YZ. and ZA. and ZB. and ZC. and ZD. and ZE. and ZF. and ZG. and ZH. and ZI. and ZJ. and ZK. and ZL. and ZM. and ZN. and ZO. and ZP. and ZQ. and ZR. and ZS. and ZT. and ZU. and ZV. and ZW. and ZX. and ZY. and ZZ.

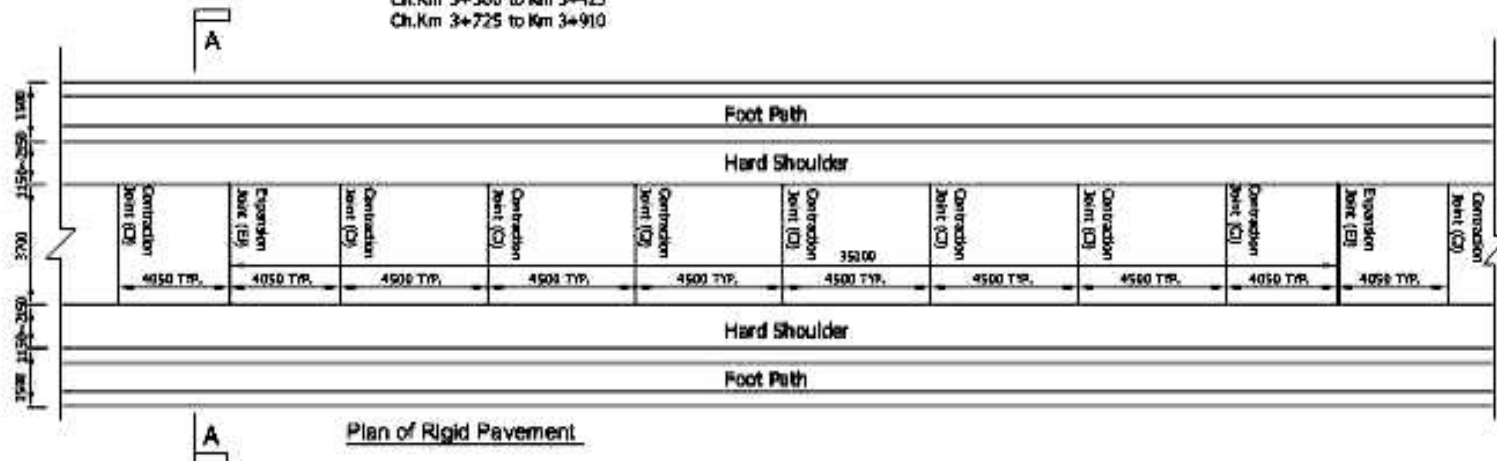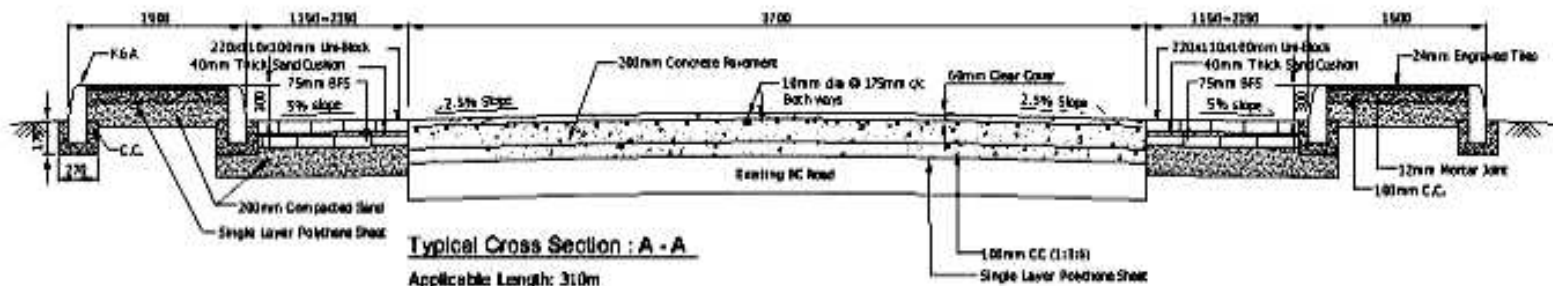

Note : Considered Design Traffic Volume = 4 Million

LOCAL GOVERNMENT ENGINEERING DEPARTMENT					
D.S.E.		D.M.E.U.		CITY REGION DEVELOPMENT PROJECTS GROUP	
PROJECT NO.	PROJECT NAME	PROJECT LOCATION	PROJECT TYPE	PROJECT STATUS	PROJECT DESCRIPTION
					POD Consultants, H&E in association with DM&I, AQUA, BETS and AM&C
					GADPUR CITY CORPORATION
					Sanitation - Improvement of Sanitation and Water Supply in the City of Gadpur

Figure 9: Typical Cross section (Ch. 3+425 km to 3+723 km)

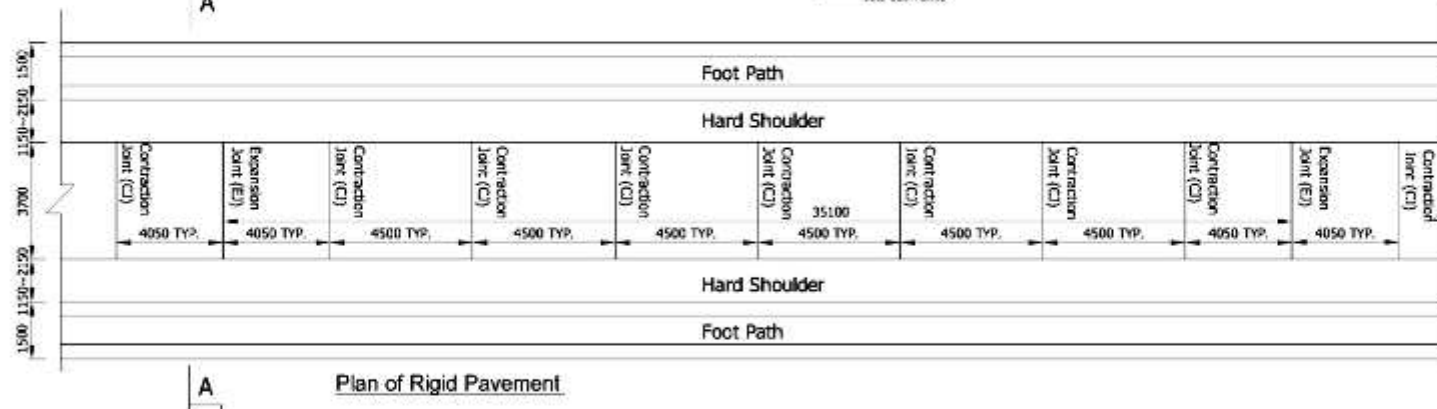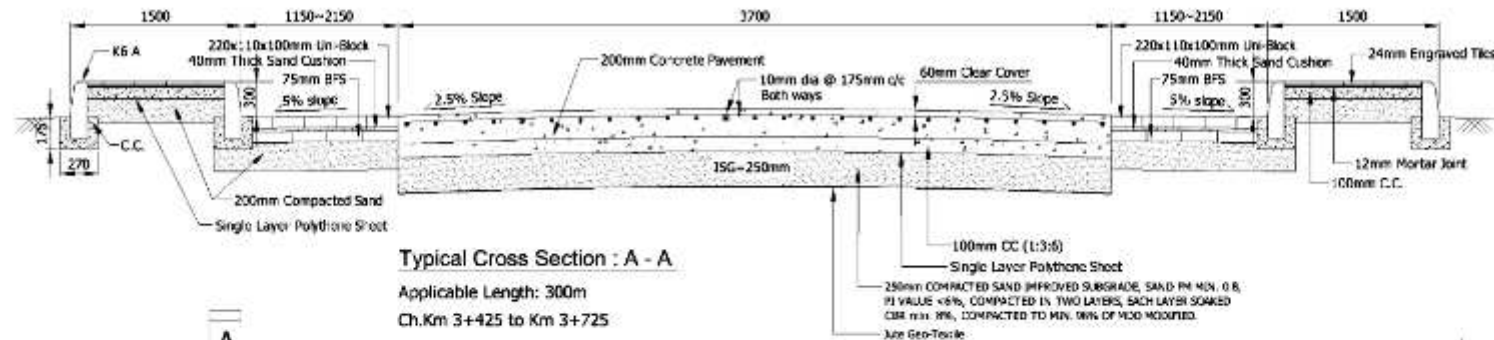

Note : Considered Design Traffic Volume= 4 Million

[illegible]

60. **Road-2: Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh from Ch. 0+000 Km to Ch. 1+745 Km, Roads (Road ID LRG4).**

Proposed interventions planned for the Existing Road (ID No. LRG4) Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh from Ch. 0+000 Km to Ch. 1+745 Km, are as follows:

- (i) Improvement of the existing 2-lane road, including footpaths at both sides of the road within ROW;
- (ii) Construction of 1 (one) 15 m bridge to replace the existing 12 m RCC Girder Bridge, and construction of a new 20 m bridge ;
- (iii) Pavement works comprising construction of sub-grade, sub-base, base binder course and wearingcourse;
- (iv) Road improvement based on design that considers the road safety requirements per LGED published guidelines and standards. This includes planning of cross section, bus and truck stand; and


61. The existing status with proposed development interventions of this road component is summarized in **Table 10**.


Table 10: Summary of Proposed Improvement Works for Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh from Ch. 0+000 Km to Ch. 1+745 Km, (Road ID LRG4)

Road/Drainage Improvement Components	Length to be Improved (km)	Chainage (m)	Present condition	Existing/Proposed Carriageway Width (m)	Existing/Proposed Road Width (m)	Proposed Development
Package W-01						
Road (2) Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh from Ch. 0+000 Km to Ch. 1+745 Km, Road. (Road ID # LRG4)	1.745	0+000 - 0+450	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	5.1~5.2/5.5	6.5~10.7/6.5~7.3	5.5m wide RCC carriage way with 1200mm CC footpath at left and 1000-1500mm interlocking Uni-block hard shoulder at right side
		0+450 - 1+745	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	3.5~7.0/5.5	5.0~10.3 /5.0~7.1	5.5m wide RCC carriage way with 1200 mm CC footpath at left and 1000-1500mm interlocking Uni-block hard shoulder at right side
Drain Construction of drain on both sides of the subproject main road at Ch.0+000-0+250 & 0+300-1+745 km; and at Ch. 0+000-0+395 km (Link Road -01)	a) 0.250 b)1.445 c) 0.395	a) 0+000 - 0+250 b) 0+300 - 1+745 c) 0+000 - 0+395 (link-1)	There is no functional drain		RCC pipe drain	Drain proposed under the footpath with Drain Pit & Catch Pit a) 1200mm dia b) 1200mmdia Drain proposed on both side of Link-01 with Drain Pit & Catch Pit c) 1000mm dia


62. The typical section for the roadway design considerations with their cross-sections are exhibited in the following Figures 10 to12.

Figure 10: Typical cross section (Ch. 0+000 to 0+450 km)

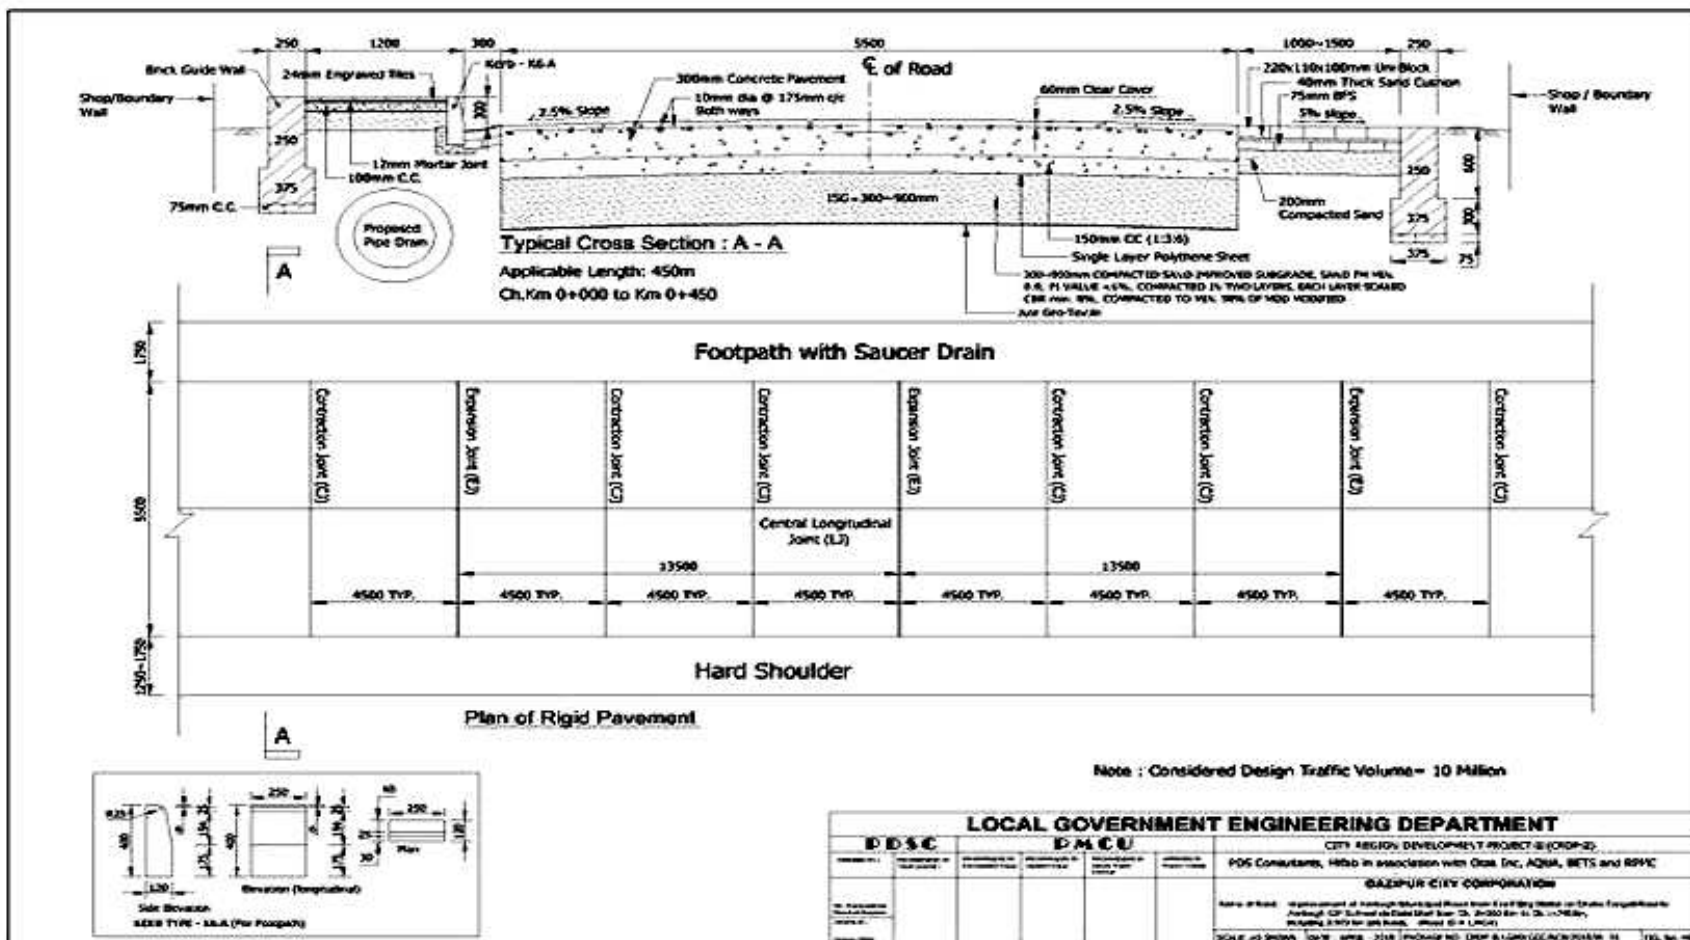

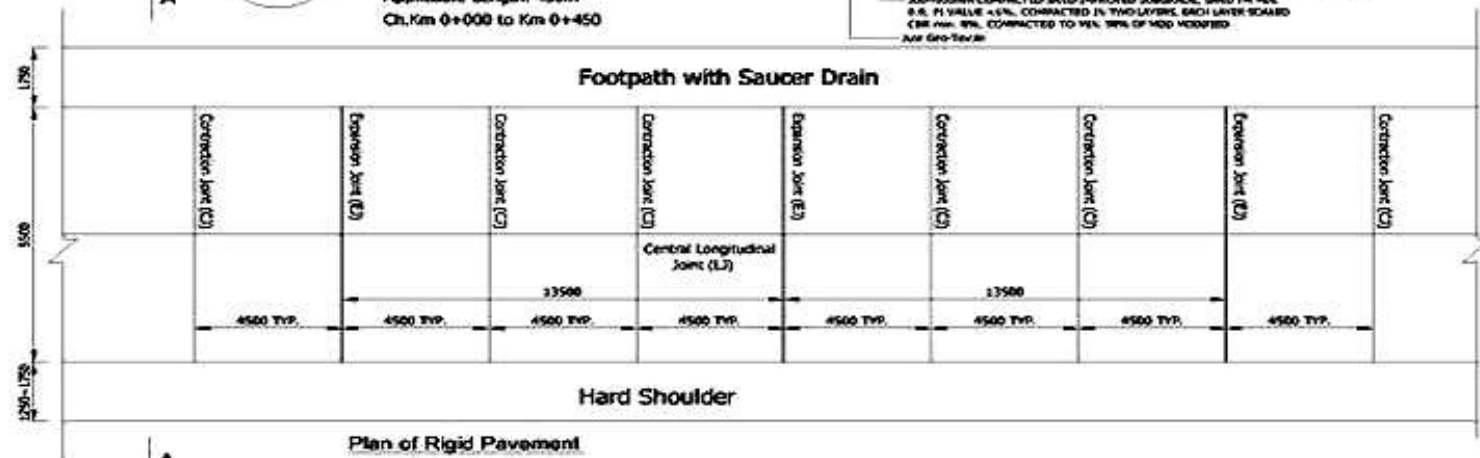


Note : Considered Design Traffic Volume= 10 Million



LOCAL GOVERNMENT ENGINEERING DEPARTMENT					CITY REGION DEVELOPMENT PROJECT (CRDP-2)	
DMU			POC Consultants, Helth in association with Olan, Inc, AQHA, BETS and RPPC			
DMU (1)	DMU (2)	DMU (3)	DMU (4)	DMU (5)	DMU (6)	DMU (7)
DMU (1)	DMU (2)	DMU (3)	DMU (4)	DMU (5)	DMU (6)	DMU (7)

Figure 11: Typical cross section (Ch. 0+450 to 1+745 km)

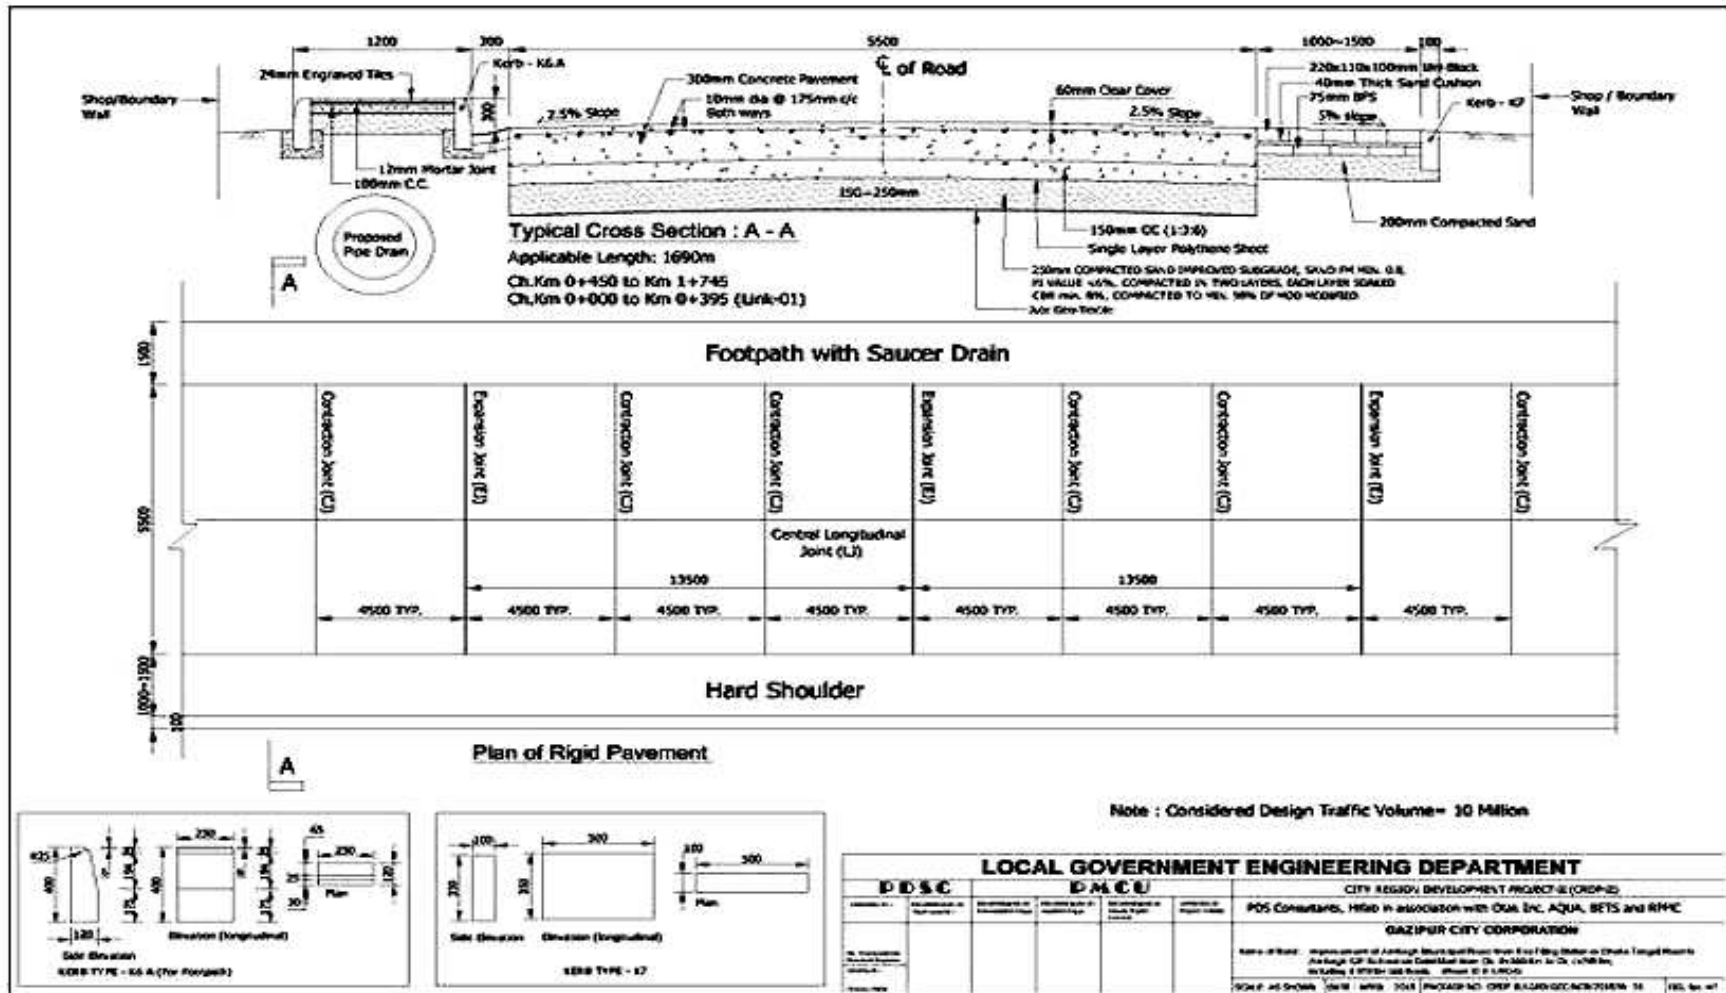



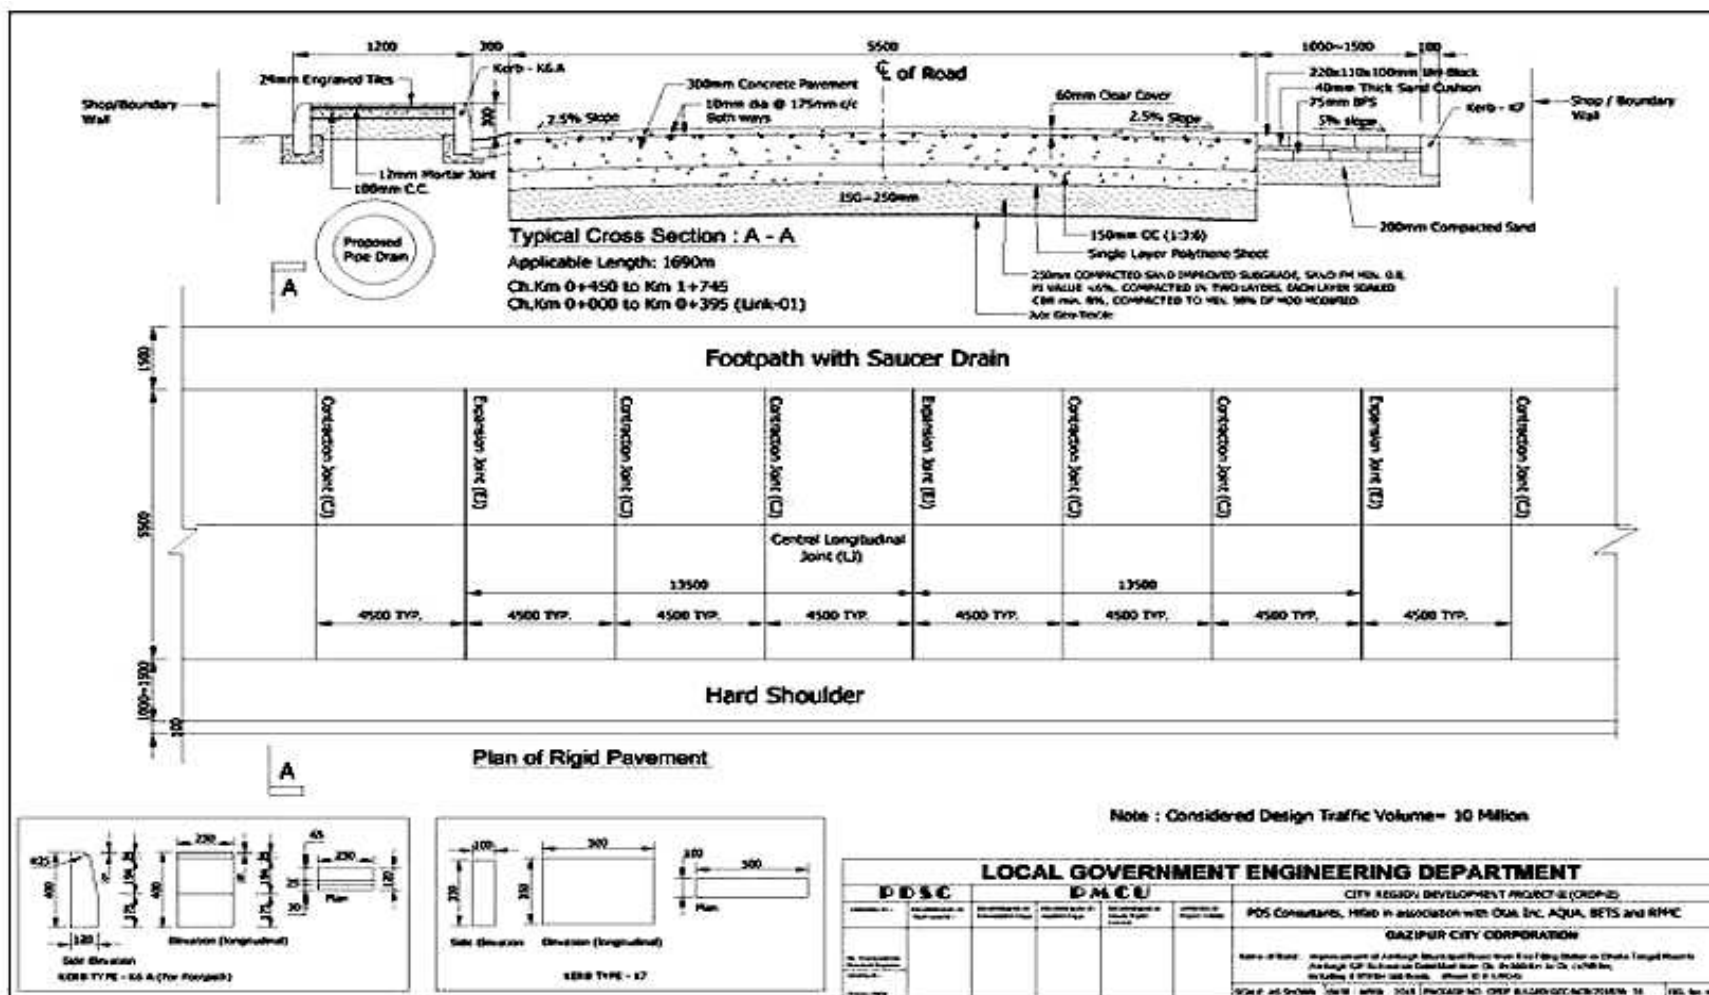


Figure 12: Typical cross section (Ch. 0+000 to 0+575 km (Link 2))

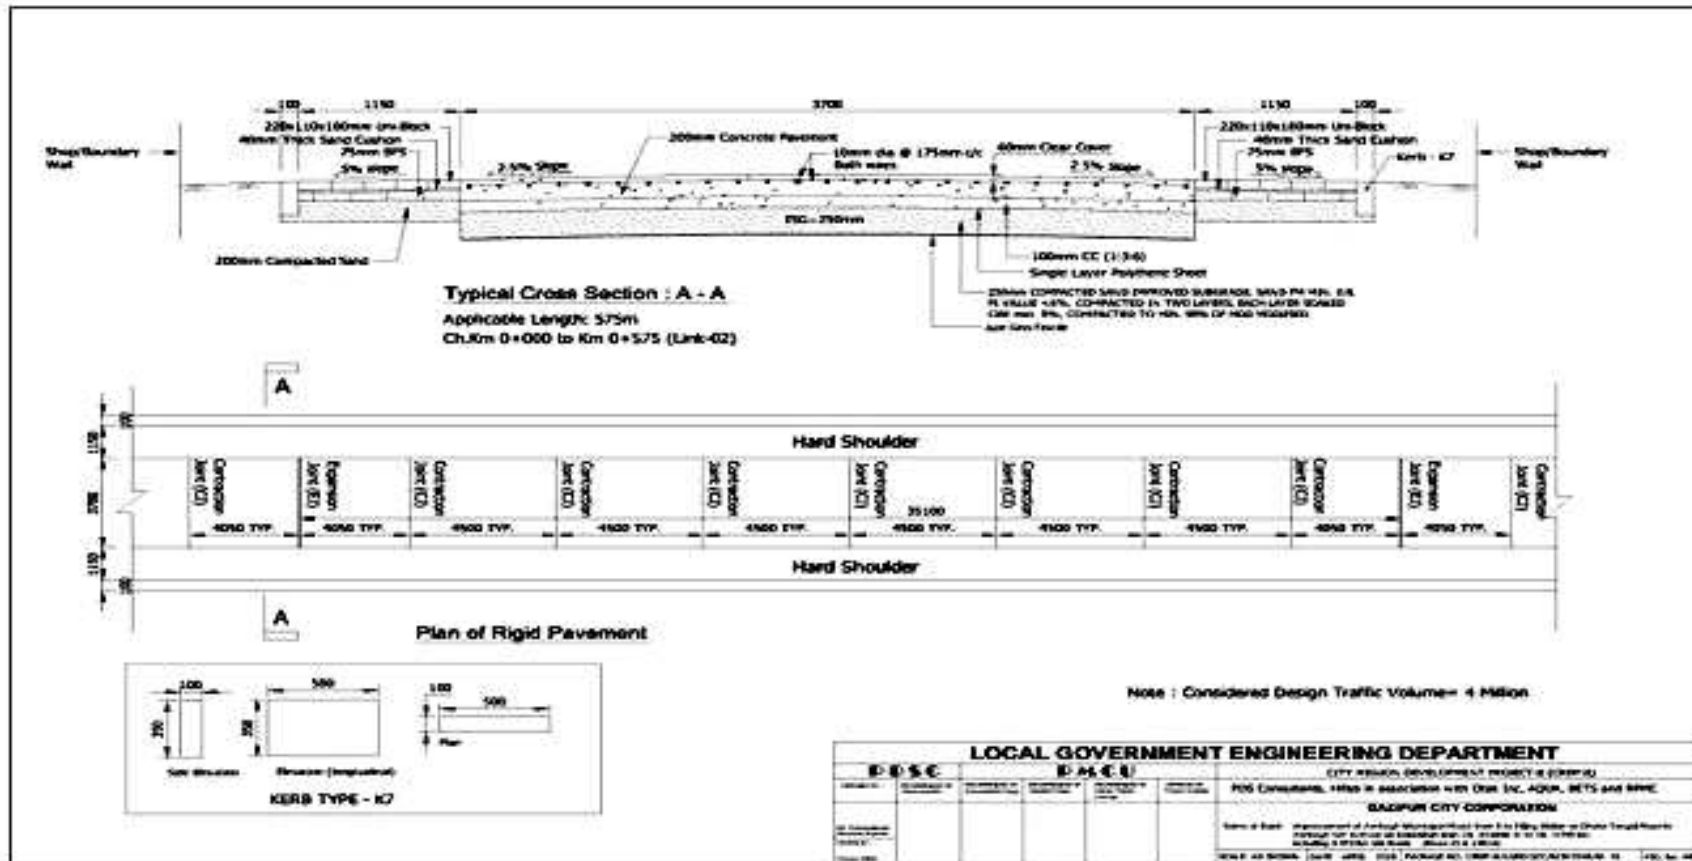

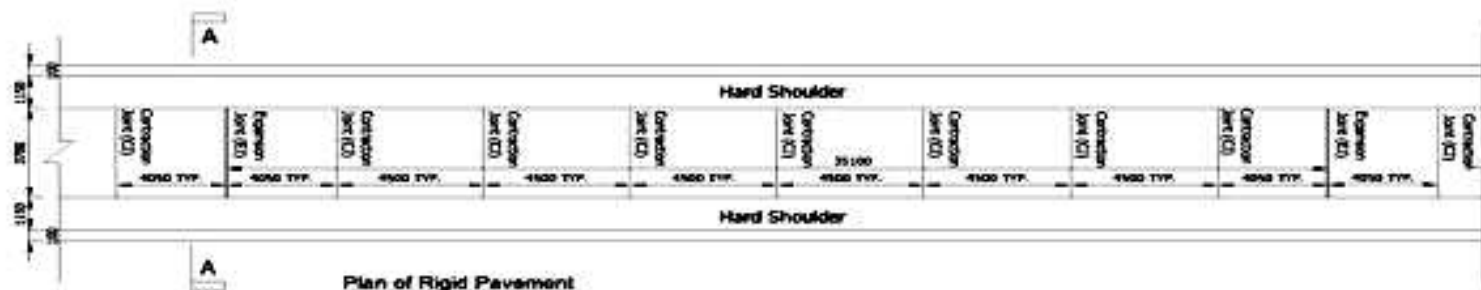

Side Elevation: A vertical rectangle with a width of 200 and a height of 250.

Elevation (frontal view): A horizontal rectangle with a width of 500 and a height of 250.

Plan: A horizontal rectangle with a width of 500 and a depth of 100.

KERB TYPE - K7

[illegible]

63. Road-3: IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and 2.625 km long Signboard to Kamarjuri road (Road ID LRG6).

Proposed interventions planned for the Existing Road (ID No. LRG6) IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and 2.625 km long Signboard to Kamarjuri road are as follows:

- (i) Improvement of the existing 2-lane road, including footpaths on both sides which are within ROW;
- (ii) Construction of a 14 m bridge at Ch. 894 m, a box culvert of size 2 x 4.5m x 4.5 m at Ch. 2161 m, a larger box culvert of size 2 x 5.0m x 5.0m box culvert at Ch. 2652 m and another box culvert of size 2 x 3.5m x 3.5m box culvert at Ch. 727 m
- (iii) Pavement works comprising construction of sub-grade, sub-base, base binder course and wearing course;
- (iv) Road improvement based on design that considers the road safety requirements per LGED published guidelines and standards. This includes planning of cross section, bus and truck stand; and
- (v) Protection works (pallisading) undertaken at locations where ditches and ponds adjacent to the road embankment are found. These will protect road edges from being eroded or sliding. Locations and lengths of proposed protection works at different sections are shown in **Table 11** below.

Table 11: Locations and Lengths of Proposed Protection Works at IUT to Icharkandi Road including Link Road and Signboard to Kamarjuri road (Road ID LRG6)

Sl.no	Left side (Chainage)	Right side (Chainage)
1	2+632 - 2+652 (20 m)	2+632 - 2+652 (20 m)
2	2+662 - 2+682 (20 m)	2+662 - 2+682 (20 m)
3	3+035 - 3+175 (40 m)	3+120 - 3+140 (20 m))
Total length of Pallisading= 80 m		= 60 m

64. The existing status with proposed development interventions of this road component is summarized in Error! Reference source not found.**2.**


Table 12: Summary of Proposed Improvement Works for IUT to Icharkandi Road Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and 2.625 km long Signboard to Kamarjuri road (Road ID # LRG6)



Road/Drainage Improvement Components	Length to be Improved (km)	Chainage (m)	Present condition	Existing/Proposed Carriageway Width (m)	Existing/Proposed Road Width (m)	Proposed Development
Package W-01						
<u>Road (3)</u>						
Road from IUT to Icharkandi Road from Ch.0+000 km to Ch.4+050 km, including 0.200 km Link Road and 2.625 km long Signboard to Kamarjuri road (Road ID # LRG6)	6.875	0+000 -0+725 3+350 -4+010 0+725-2+000 2+575 -2+900	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	2.6~5.5/3.0	4.5~10.0/4.5~7.3	3.0m RCC carriageway with 1250mm interlocking Uni-block) hard shoulder & 800mm soft shoulder at both side RCC drain one side under hard shoulder
		2+000 - 2+575 2+900 -3+125 3+125 -3+350	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	3.2~3.4/3.0	6.7~11.7/6.7~7.3	150mm WBM & 40mm asphalt wearing course on existing BC road. 1250mm interlocking CC block shoulders & 675 mm soft shoulders both side
		4+010 - 4+050	Earthen Road	1.8~3.4/3.0	7.0~9.3/7.0 - 7.3	3000mm interlocking Uni-block carriageway and 2050mm soft shoulders both side
		0+000 -0+200 (Link-1)	Earthen Road	2.3~2.7/3.0	5.5~6.1/5.5	3000mm RCC carriageway with 1150mm soft shoulder at both side
		0+000 -0+727 (signboard –kamarjuri) 0+727- 1+650 (signboard –kamarjuri)	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	3.5~4.7/5.5	5.6~10.6/5.6~6.6	5.5 m RCC carriageway with 1200 mm CC footpath at one side and 500-1000 mm interlocking CC block (Uni-block) hard shoulder at other side RCC drain one side under hard shoulder
		1+650 – 2+150 (signboard –kamarjuri)	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	3.3/3.0	6.3~8.0/6.3~7.3	100 mm WBM & 40mm asphalt wearing course on existing BC road. 1250mm interlocking CC block shoulders & 675 mm soft shoulders both side

		2+150 – 2+265 (signboard –kamarjuri)	Partial or full damaged BC, brick soling, cracks, potholes, broken edge and depressions	3.0/3.0	4.1~7.0/4.1~7.0	RCC on existing BC road. 1250mm interlocking CC block shoulders & 675 mm soft shoulders both side
<u>Drain</u> Construction of drain on IUT- Icharkandi road : a) at Ch.0+500- 0+900, b) 0+000-0+500 km; and on Signboard - Kamarjuri : c) 0+000-1+375 km	a) 0.40 b) 0.50 c)1.375	a).0+500- 0+900 b) 0+000-0+500 c) 0+000-1+375	There is no functional drain		a) RCC pipe drain b) RCC pipe drain c) RCC U-Drain	Drain with Drain Pit and Catch Pit a) 1200mm dia b) 1000mm dia c) Drain under the footpath with Drain Pit and Catch Pit

65. The typical section for the roadway design considerations with their cross-sections are exhibited in the following **Figures 13 to 19**

Figure 13: Typical cross section (Ch. 0+000 to 0+725 km) & (Ch. 3+350 to 4+010 km)

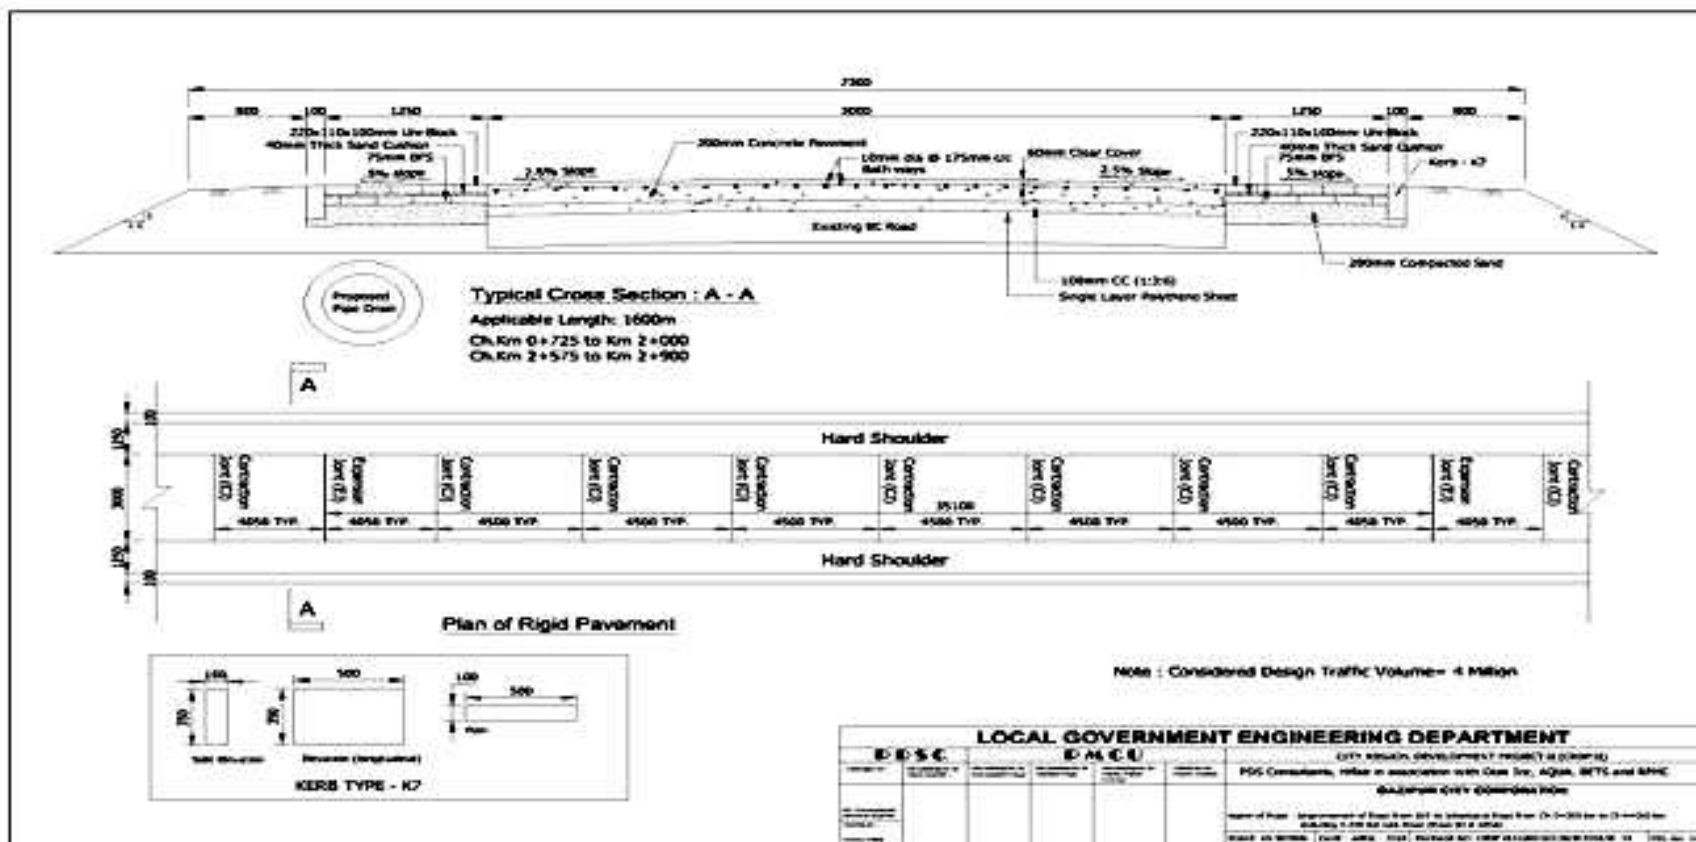


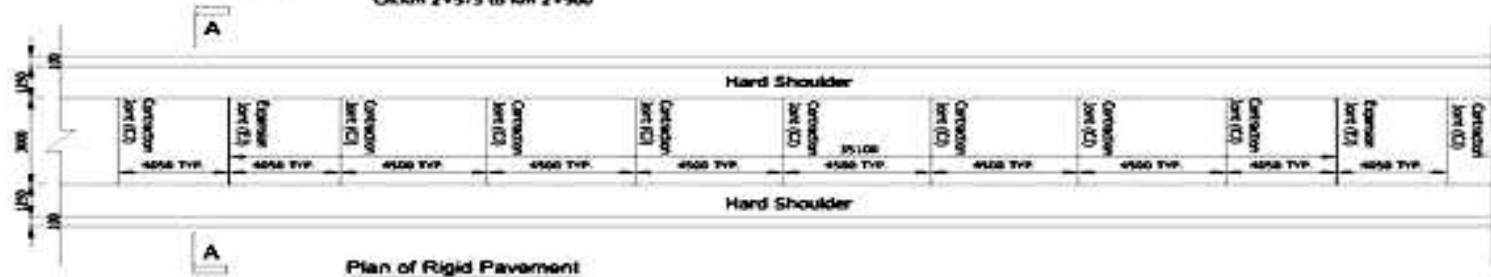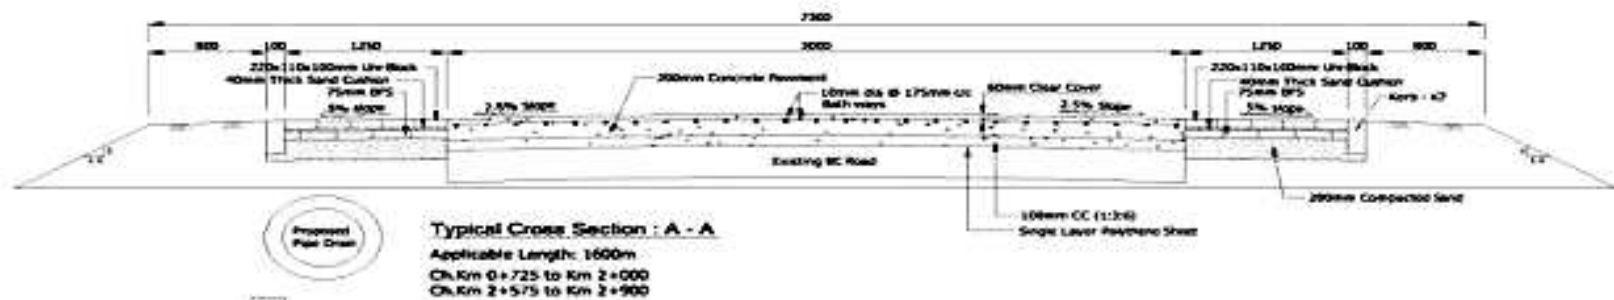


Note : Considered Design Traffic Volume= 4 Million

LOCAL GOVERNMENT ENGINEERING DEPARTMENT					
DESIGN		PROJECT			
PROJECT NAME	PROJECT LOCATION	PROJECT NO.	PROJECT YEAR	PROJECT STATUS	PROJECT OWNER
PROJECT DESCRIPTION	PROJECT LOCATION	PROJECT NO.	PROJECT YEAR	PROJECT STATUS	PROJECT OWNER
PROJECT DESCRIPTION	PROJECT LOCATION	PROJECT NO.	PROJECT YEAR	PROJECT STATUS	PROJECT OWNER
PROJECT DESCRIPTION	PROJECT LOCATION	PROJECT NO.	PROJECT YEAR	PROJECT STATUS	PROJECT OWNER


Figure 14: Typical cross section (Ch. 0+725 to 2+000 km) & (Ch. 2+575 to 2+900 km)

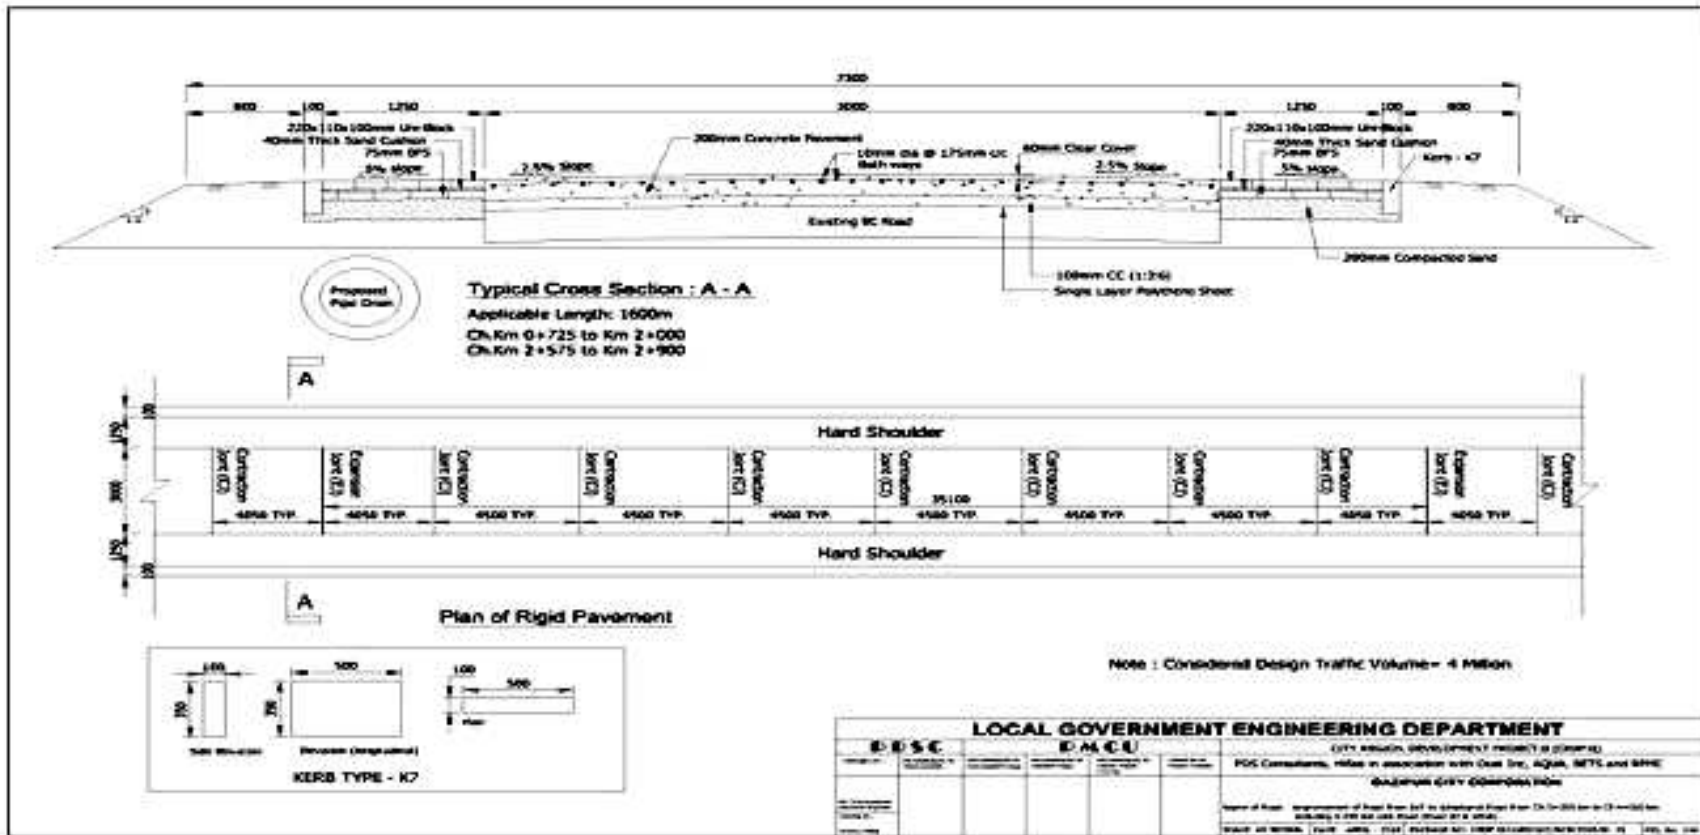


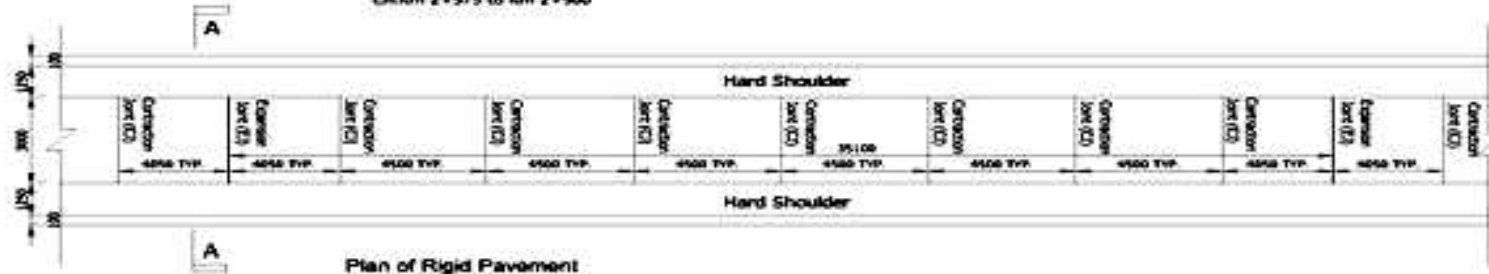

LOCAL GOVERNMENT ENGINEERING DEPARTMENT				
B O S C		P A M C U		
POSITION	EDUCATION	EXPERIENCE	EXPERIENCE	NOTES
				<p>CITY REGION DEVELOPMENT PLANNING (CRDP)</p> <p>POC Consultants, in association with Doug Lee, AGPS, MPTG and BME</p> <p>Full-time City Engineer, 1980</p> <p>Open to those who have completed a full-time 4-year engineering program from 1970 to 1980 or 1981 to 1982 or 1983 to 1984 or 1985 to 1986 or 1987 to 1988 or 1989 to 1990 or 1991 to 1992 or 1993 to 1994 or 1995 to 1996 or 1997 to 1998 or 1999 to 2000 or 2001 to 2002 or 2003 to 2004 or 2005 to 2006 or 2007 to 2008 or 2009 to 2010 or 2011 to 2012 or 2013 to 2014 or 2015 to 2016 or 2017 to 2018 or 2019 to 2020 or 2021 to 2022 or 2023 to 2024 or 2025 to 2026 or 2027 to 2028 or 2029 to 2030 or 2031 to 2032 or 2033 to 2034 or 2035 to 2036 or 2037 to 2038 or 2039 to 2040 or 2041 to 2042 or 2043 to 2044 or 2045 to 2046 or 2047 to 2048 or 2049 to 2050 or 2051 to 2052 or 2053 to 2054 or 2055 to 2056 or 2057 to 2058 or 2059 to 2060 or 2061 to 2062 or 2063 to 2064 or 2065 to 2066 or 2067 to 2068 or 2069 to 2070 or 2071 to 2072 or 2073 to 2074 or 2075 to 2076 or 2077 to 2078 or 2079 to 2080 or 2081 to 2082 or 2083 to 2084 or 2085 to 2086 or 2087 to 2088 or 2089 to 2090 or 2091 to 2092 or 2093 to 2094 or 2095 to 2096 or 2097 to 2098 or 2099 to 2100 or 2101 to 2102 or 2103 to 2104 or 2105 to 2106 or 2107 to 2108 or 2109 to 2110 or 2111 to 2112 or 2113 to 2114 or 2115 to 2116 or 2117 to 2118 or 2119 to 2120 or 2121 to 2122 or 2123 to 2124 or 2125 to 2126 or 2127 to 2128 or 2129 to 2130 or 2131 to 2132 or 2133 to 2134 or 2135 to 2136 or 2137 to 2138 or 2139 to 2140 or 2141 to 2142 or 2143 to 2144 or 2145 to 2146 or 2147 to 2148 or 2149 to 2150 or 2151 to 2152 or 2153 to 2154 or 2155 to 2156 or 2157 to 2158 or 2159 to 2160 or 2161 to 2162 or 2163 to 2164 or 2165 to 2166 or 2167 to 2168 or 2169 to 2170 or 2171 to 2172 or 2173 to 2174 or 2175 to 2176 or 2177 to 2178 or 2179 to 2180 or 2181 to 2182 or 2183 to 2184 or 2185 to 2186 or 2187 to 2188 or 2189 to 2190 or 2191 to 2192 or 2193 to 2194 or 2195 to 2196 or 2197 to 2198 or 2199 to 2200 or 2201 to 2202 or 2203 to 2204 or 2205 to 2206 or 2207 to 2208 or 2209 to 2210 or 2211 to 2212 or 2213 to 2214 or 2215 to 2216 or 2217 to 2218 or 2219 to 2220 or 2221 to 2222 or 2223 to 2224 or 2225 to 2226 or 2227 to 2228 or 2229 to 2230 or 2231 to 2232 or 2233 to 2234 or 2235 to 2236 or 2237 to 2238 or 2239 to 2240 or 2241 to 2242 or 2243 to 2244 or 2245 to 2246 or 2247 to 2248 or 2249 to 2250 or 2251 to 2252 or 2253 to 2254 or 2255 to 2256 or 2257 to 2258 or 2259 to 2260 or 2261 to 2262 or 2263 to 2264 or 2265 to 2266 or 2267 to 2268 or 2269 to 2270 or 2271 to 2272 or 2273 to 2274 or 2275 to 2276 or 2277 to 2278 or 2279 to 2280 or 2281 to 2282 or 2283 to 2284 or 2285 to 2286 or 2287 to 2288 or 2289 to 2290 or 2291 to 2292 or 2293 to 2294 or 2295 to 2296 or 2297 to 2298 or 2299 to 2300 or 2301 to 2302 or 2303 to 2304 or 2305 to 2306 or 2307 to 2308 or 2309 to 2310 or 2311 to 2312 or 2313 to 2314 or 2315 to 2316 or 2317 to 2318 or 2319 to 2320 or 2321 to 2322 or 2323 to 2324 or 2325 to 2326 or 2327 to 2328 or 2329 to 2330 or 2331 to 2332 or 2333 to 2334 or 2335 to 2336 or 2337 to 2338 or 2339 to 2340 or 2341 to 2342 or 2343 to 2344 or 2345 to 2346 or 2347 to 2348 or 2349 to 2350 or 2351 to 2352 or 2353 to 2354 or 2355 to 2356 or 2357 to 2358 or 2359 to 2360 or 2361 to 2362 or 2363 to 2364 or 2365 to 2366 or 2367 to 2368 or 2369 to 2370 or 2371 to 2372 or 2373 to 2374 or 2375 to 2376 or 2377 to 2378 or 2379 to 2380 or 2381 to 2382 or 2383 to 2384 or 2385 to 2386 or 2387 to 2388 or 2389 to 2390 or 2391 to 2392 or 2393 to 2394 or 2395 to 2396 or 2397 to 2398 or 2399 to 2400 or 2401 to 2402 or 2403 to 2404 or 2405 to 2406 or 2407 to 2408 or 2409 to 2410 or 2411 to 2412 or 2413 to 2414 or 2415 to 2416 or 2417 to 2418 or 2419 to 2420 or 2421 to 2422 or 2423 to 2424 or 2425 to 2426 or 2427 to 2428 or 2429 to 2430 or 2431 to 2432 or 2433 to 2434 or 2435 to 2436 or 2437 to 2438 or 2439 to 2440 or 2441 to 2442 or 2443 to 2444 or 2445 to 2446 or 2447 to 2448 or 2449 to 2450 or 2451 to 2452 or 2453 to 2454 or 2455 to 2456 or 2457 to 2458 or 2459 to 2460 or 2461 to 2462 or 2463 to 2464 or 2465 to 2466 or 2467 to 2468 or 2469 to 2470 or 2471 to 2472 or 2473 to 2474 or 2475 to 2476 or 2477 to 2478 or 2479 to 2480 or 2481 to 2482 or 2483 to 2484 or 2485 to 2486 or 2487 to 2488 or 2489 to 2490 or 2491 to 2492 or 2493 to 2494 or 2495 to 2496 or 2497 to 2498 or 2499 to 2500 or 2501 to 2502 or 2503 to 2504 or 2505 to 2506 or 2507 to 2508 or 2509 to 2510 or 2511 to 2512 or 2513 to 2514 or 2515 to 2516 or 2517 to 2518 or 2519 to 2520 or 2521 to 2522 or 2523 to 2524 or 2525 to 2526 or 2527 to 2528 or 2529 to 2530 or 2531 to 2532 or 2533 to 2534 or 2535 to 2536 or 2537 to 2538 or 2539 to 2540 or 2541 to 2542 or 2543 to 2544 or 2545 to 2546 or 2547 to 2548 or 2549 to 2550 or 2551 to 2552 or 2553 to 2554 or 2555 to 2556 or 2557 to 2558 or 2559 to 2560 or 2561 to 2562 or 2563 to 2564 or 2565 to 2566 or 2567 to 2568 or 2569 to 2570 or 2571 to 2572 or 2573 to 2574 or 2575 to 2576 or 2577 to 2578 or 2579 to 2580 or 2581 to 2582 or 2583 to 2584 or 2585 to 2586 or 2587 to 2588 or 2589 to 2590 or 2591 to 2592 or 2593 to 2594 or 2595 to 2596 or 2597 to 2598 or 2599 to 2600 or 2601 to 2602 or 2603 to 2604 or 2605 to 2606 or 2607 to 2608 or 2609 to 2610 or 2611 to 2612 or 2613 to 2614 or 2615 to 2616 or 2617 to 2618 or 2619 to 2620 or 2621 to 2622 or 262</p>

Figure 15: Typical cross section (Ch. 2+000 to 2+575 km) & (Ch. 2+900 to 3+125 km) & (Ch. 3+125 to 3+350 km)

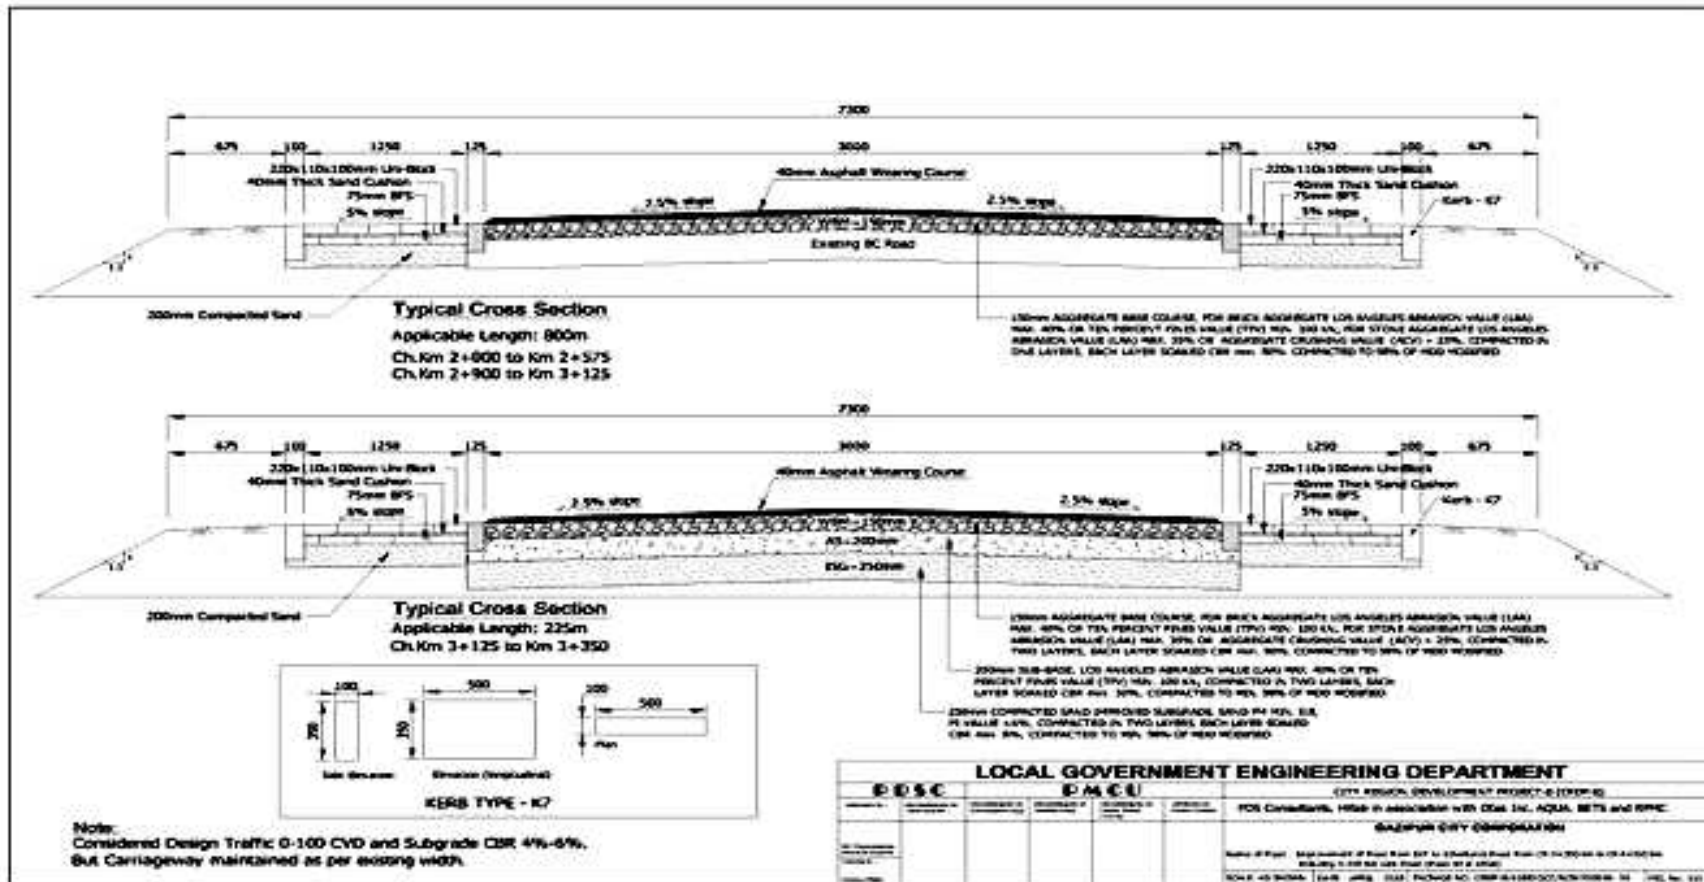

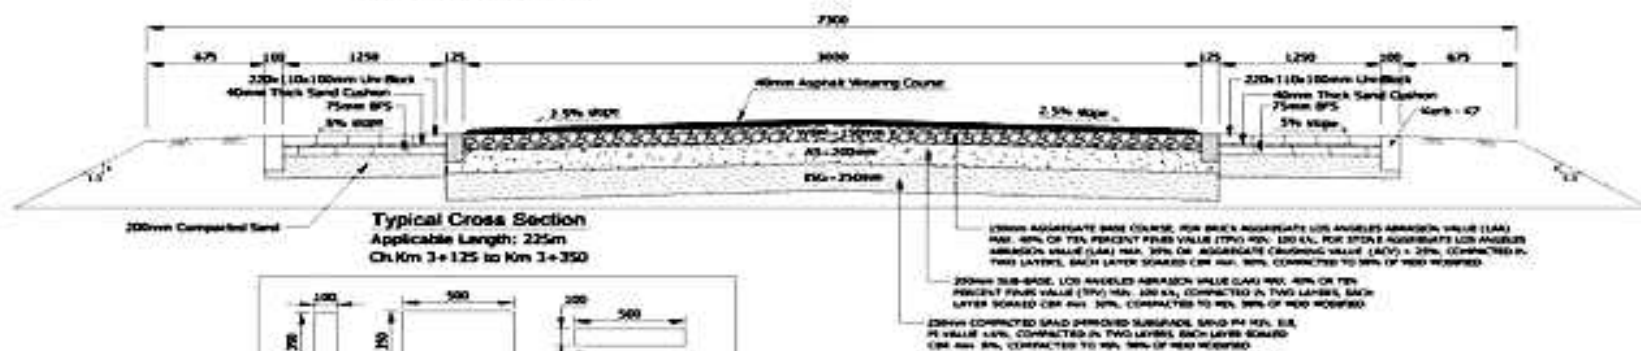

Note:
Considered Design Traffic 0-100 CVD and Subgrade CSR 4%-6%,
But Carriageway maintained as per existing width.

[illegible]

Figure 16: Typical cross section (Ch. 4+010 to 4+050 km) & (Ch. 0+000 to 0+200 km (Link -1)


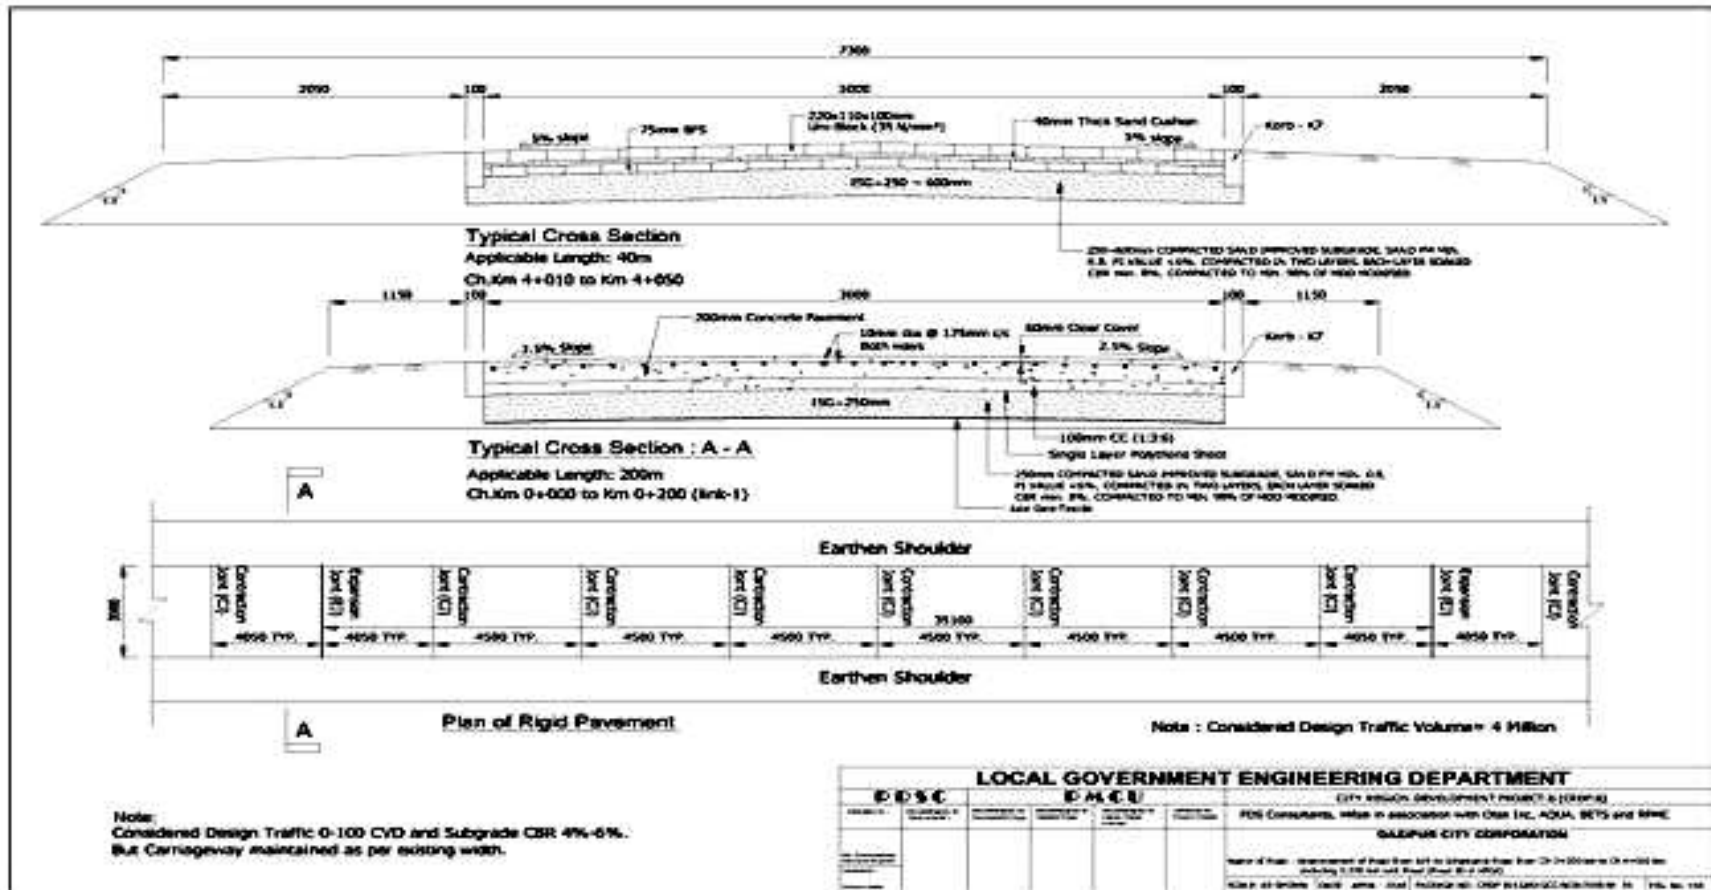


Figure 17: Typical cross section (Ch. 0+000 to 0+727 km)



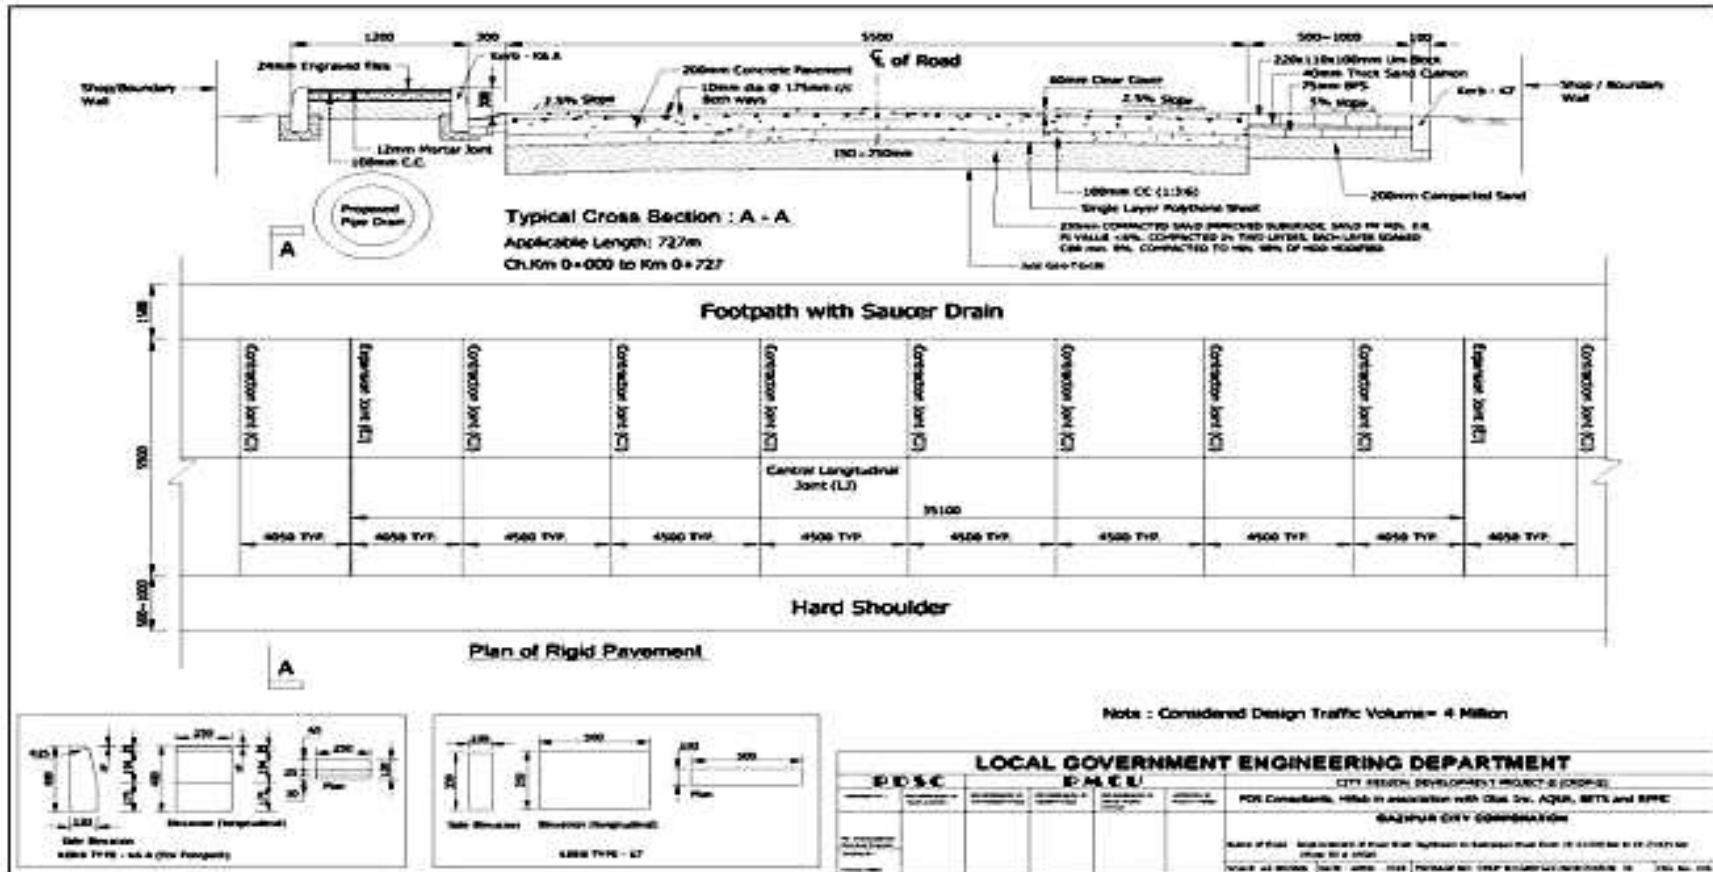

Side View

Inscribed (Horizontal)

20

1.5

6.5

10

1.5


270





40

Figure 1 shows the dimensions of the test specimens. The Side View shows a height of 100 mm and a width of 100 mm. The Top View shows a length of 300 mm and a width of 100 mm. The Plan view shows a length of 300 mm and a width of 100 mm.

[illegible]

Figure 18: Typical cross section (Ch. 0+727 to 1+650 km)

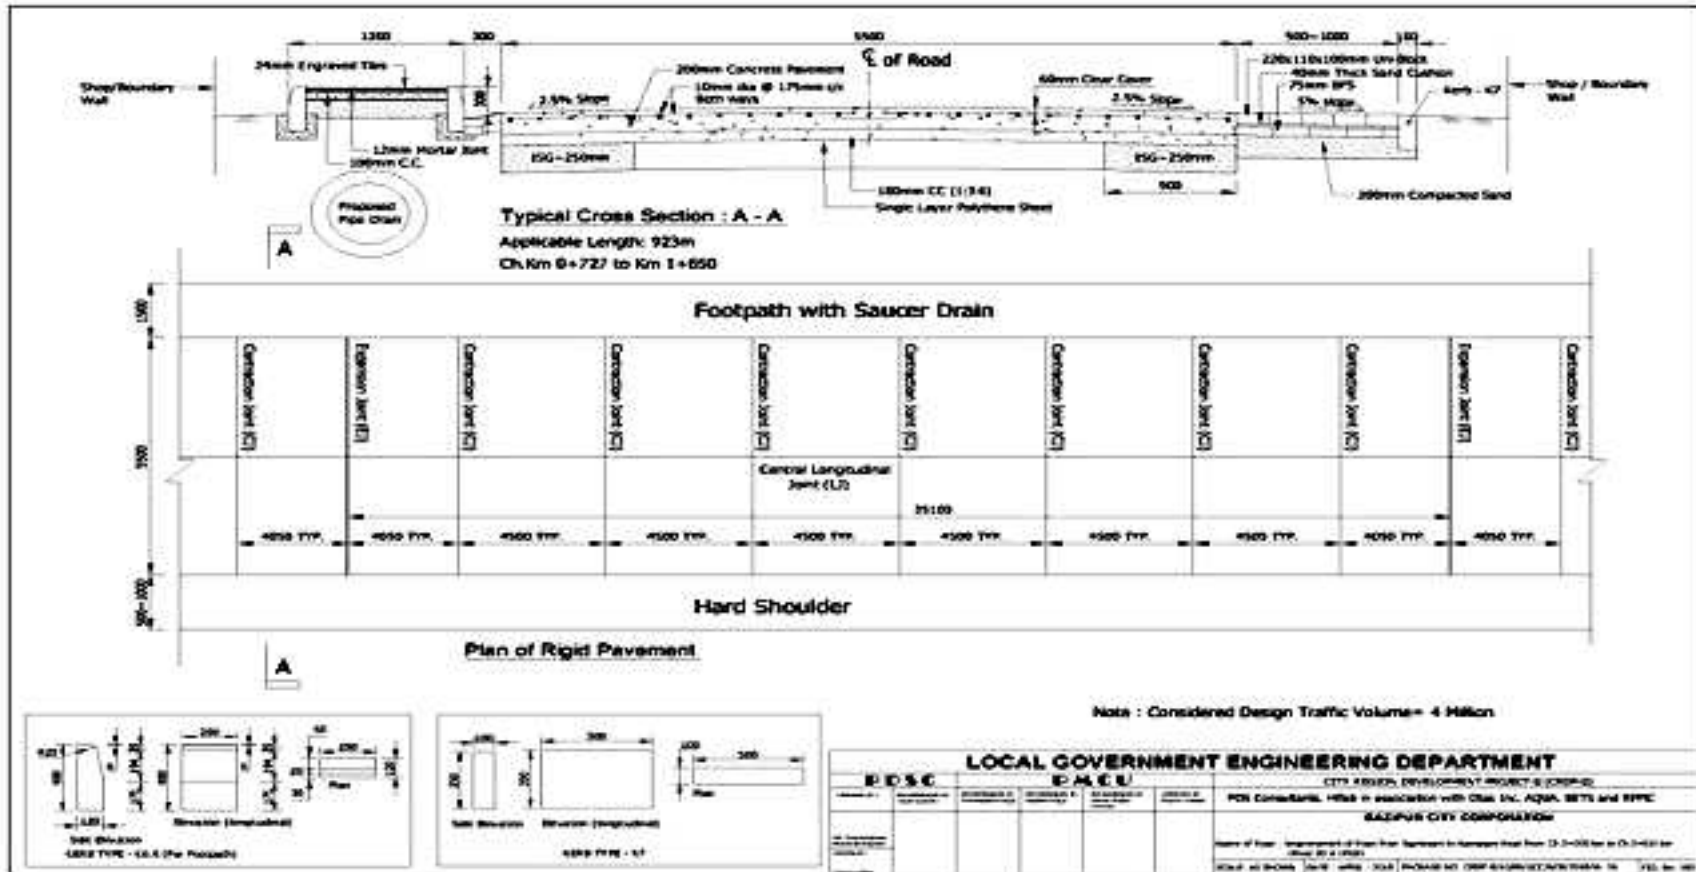


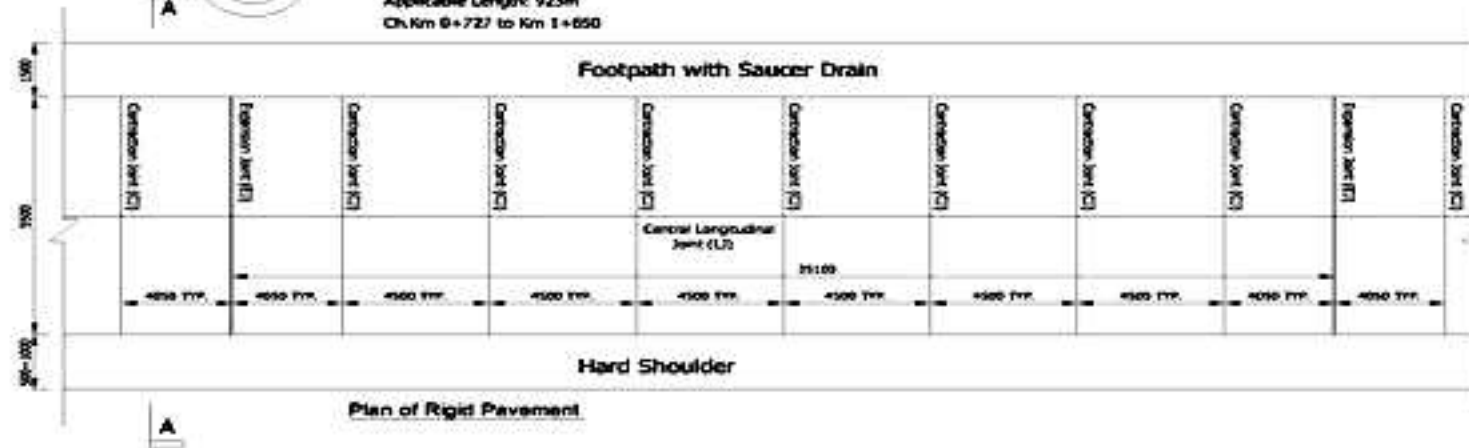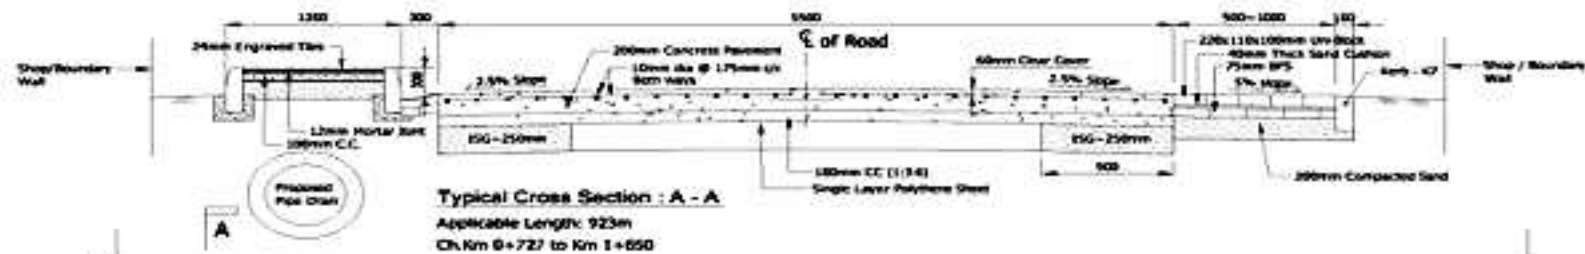

Note : Considered Design Traffic Volume= 4 Million

LOCAL GOVERNMENT ENGINEERING DEPARTMENT				
P.D.C.		D.A.C.U.		
Project No.	Project Name	Project No.	Project Name	Project No.
<p>City & District Development Project - 2018-19</p> <p>For Construction, H&S in association with Chas. Inc., Aqan, B&B and R&P</p> <p>KAZIPUR CITY CORPORATION</p> <p>Name of Firm: Implementation of Urban Fringe Expansion in Karampur Road from 13.3+000 to 13.3+400 km</p> <p>Scale: 1:1000 Date: 10/10/2018</p>				

Figure 19: Typical cross section (Ch. 1+650 to 2+150 km) & (Ch. 2+150 to 2+625 km)

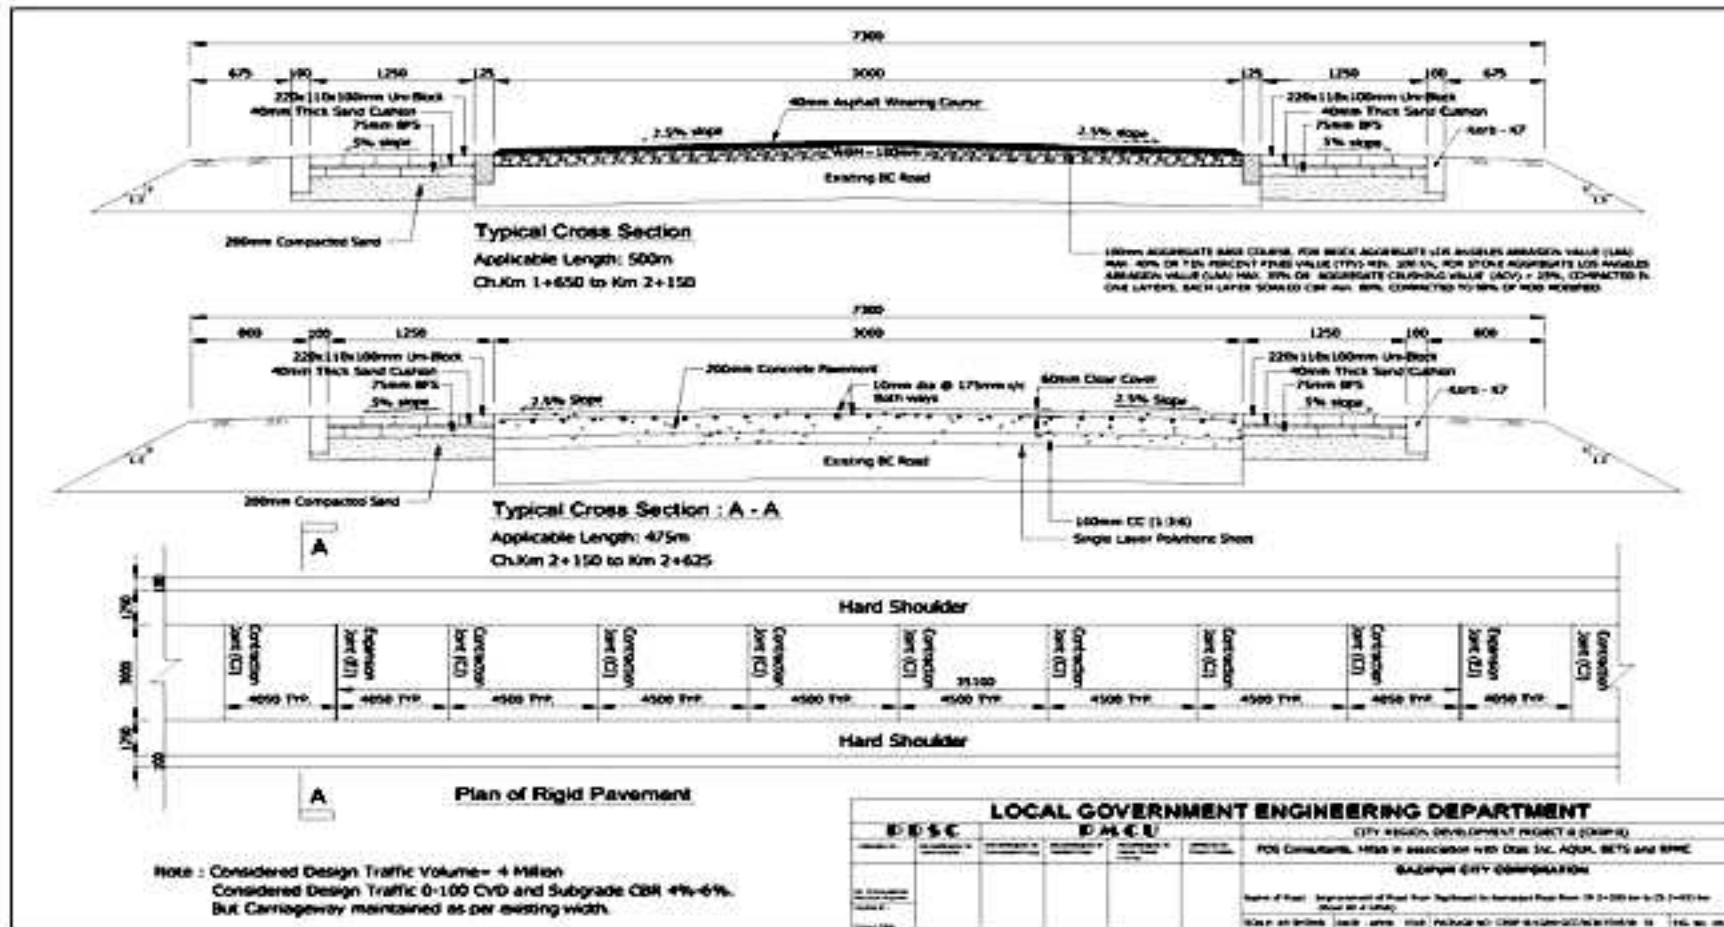

[illegible]


IV. DESCRIPTION OF THE ENVIRONMENT


A. Physical Resources

66. **Location and Extent.** The proposed subproject is located in Gazipur Sadar Upazila of Gazipur District in the division of Dhaka, Bangladesh, and it is in between 23°53' and 24°11' north latitudes and in between 90°20' and 92°30' east longitudes. It is bounded by Sreepur (Gazipur) Upazila on the north, Savar and Rupganj Upazilas and Uttara Thana on the south, Kaliganj (Gazipur) and Rupganj Upazilas on the east, Kaliakair and Savar Upazilas on the west. Total area of the Upazila is 446.38 sq km. The area of the Gazipur town is 49.32 km².

67. **Topography, Soil and Geology.** The area is generally low-lying upland and poorly drained. The average height of the south and south-eastern part of Gazipur district is 6 meters from the mean sea level and the height of the western part of the ridge (higher slope) at Kaliakair is 30 meters above the mean sea level. The area is nearly slope from west to east. Soils are brown to red brown, slightly to strongly acid, friable clay loams to clays, weathered Madhupur clay substratum to a deeper depth. They occur extensively on the edges of broad level terraces in the Madhupur Tract, allowing for some seepage of surface water into the soil, but in general the area is subject to seasonal flooding. Shitalakshya is the major drainage channel of the area, in which slowly draining river channels (Turag, Balu, Labandaha and Salda) and notable Tongi Canal will transport surface runoff to the river Shitalakshya.

68. **Climate.** The temperature maximum (Tmax) at Gazipur Upazila ranges from 25.6° C (in January) to 34.2° C (in April), and temperature minimum (Tmin) ranges from 12.2° C (in January) to 26.1° C (in August). The monthly rainfall averages 388mm (in June) in monsoon and 4mm (in January) in winter.

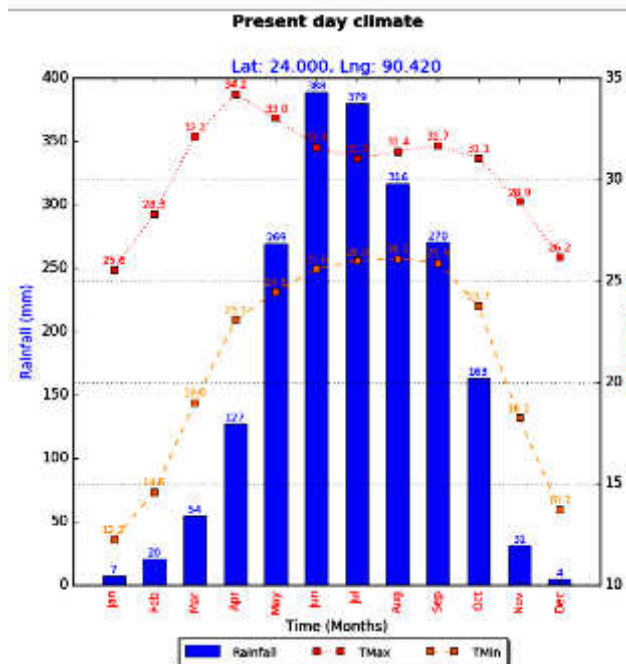


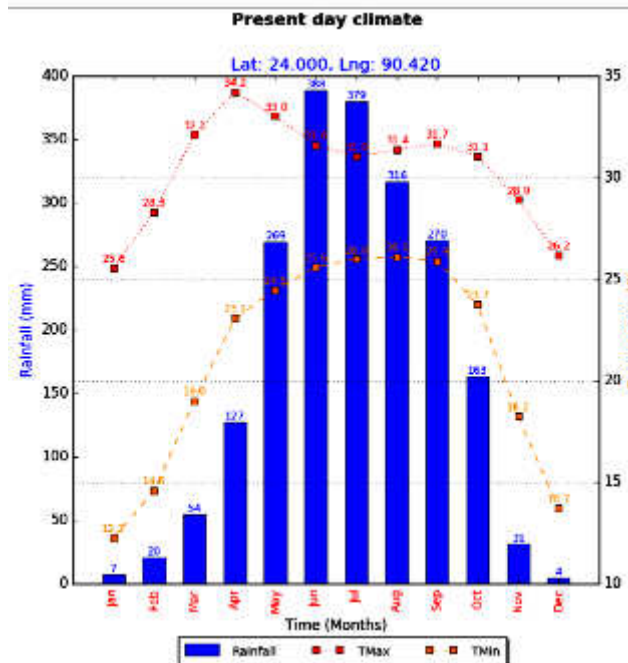

69. **Air Quality.** No information is available on local air quality. Population density within the subproject area of the Upazila is high and there are many motor vehicles operating on the subproject roads and other roads within the upazila. It is expected that the subproject will not cause significant deterioration of air quality in the area. Close vegetation is observed in and around the project area. Prior to construction activities, subproject contractors will conduct air quality measurements as baseline. During construction, contractors will be required to conduct air quality measurements and ensure that the subproject does not cause deterioration of ambient air quality. This is included in the environmental management plan hereof.

70. **Surface Water.** Shitalakshya (located at a distance of about 13 km east of the subproject area) is the main river channel of the area flowing from north to south, which is the ultimate discharge point of other 2 (two) drainage channels namely, river Balu which is about 3 km east of subproject area and river Turag which is also about 3 km west of the subproject area. There is another drainage channel river Dhaleshwari which is about 10 km west of the subproject area, and its ultimate discharge takes place in the river Buriganga through the middle of subproject area. Further other small canals and streams flowing through the Upazila are directly connected either to these two main rivers (Shitalakshya and Buriganga). Error! Reference source not found.20 below shows the location of the subproject sites from these river systems.

Figure 20: Map showing location of subproject sites relative to Shitalakshya and Meghna rivers

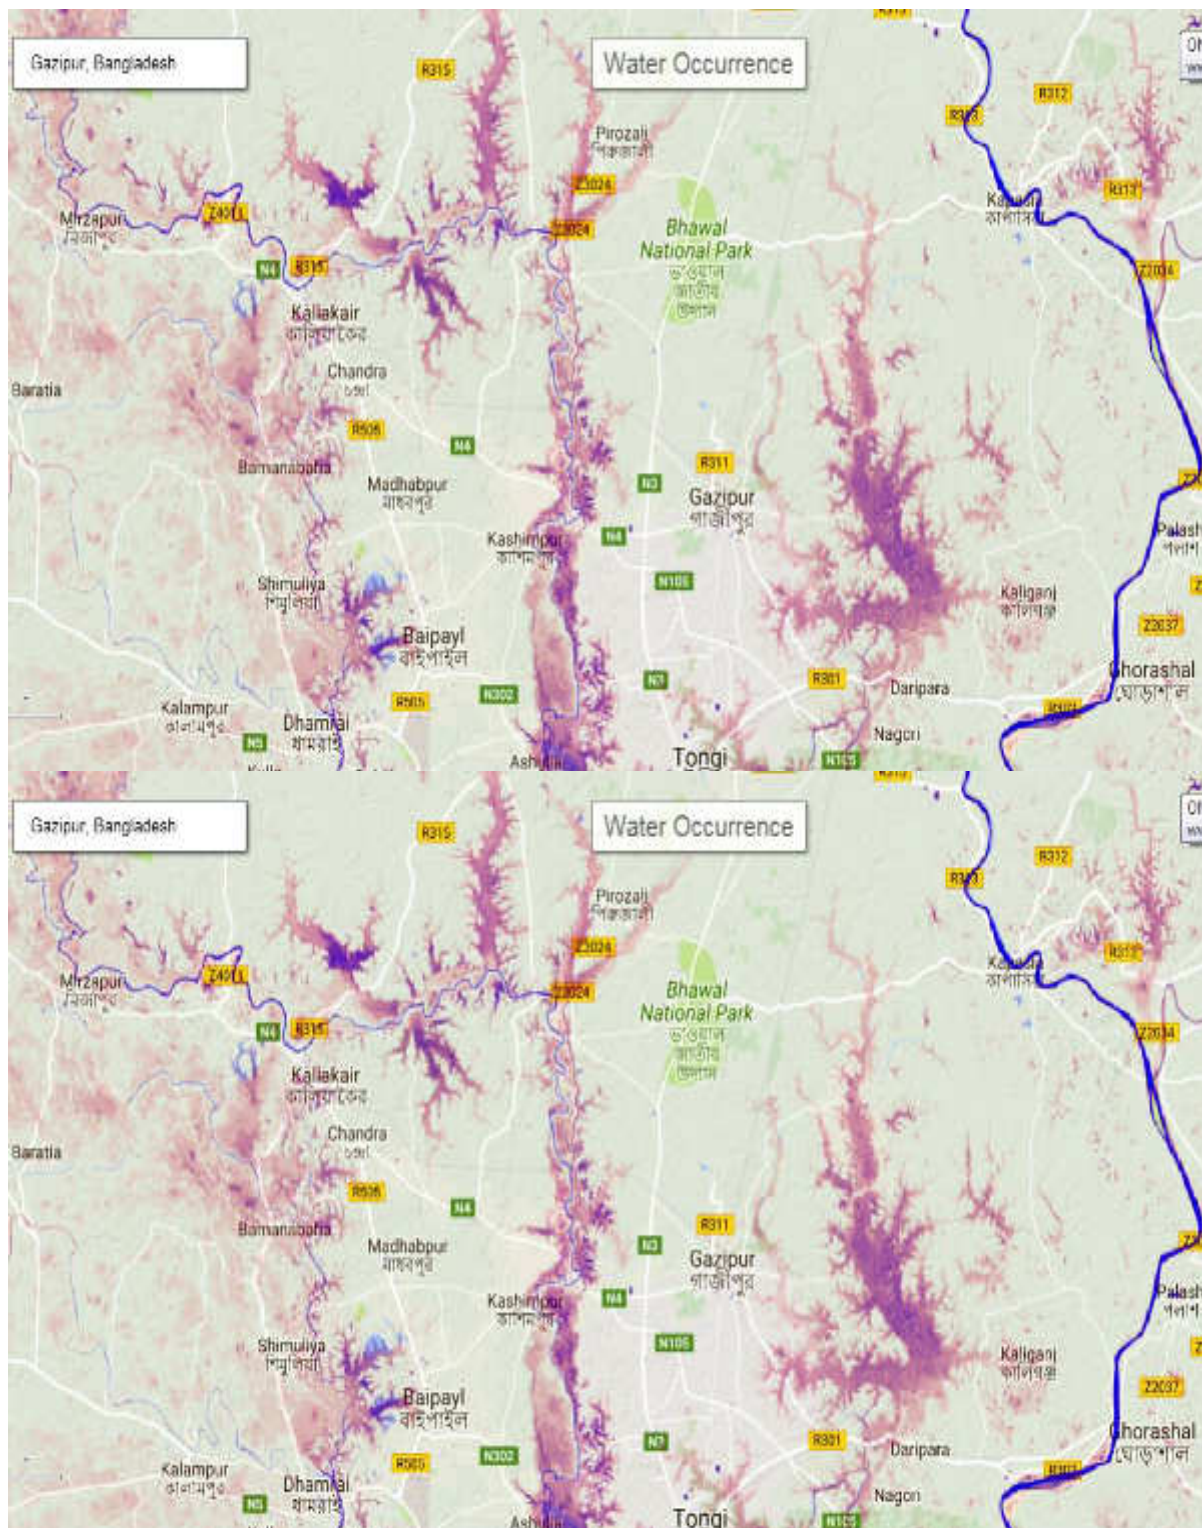

71. **Groundwater.** Groundwater is abundant in Bangladesh. Water tables are generally shallow and aquifers are productive. The water table at Gazipur Upazilla is shallow; however the main aquifer, which is the source of water supply, is found at a depth of greater than 50 m. Arsenic contamination is generally not present in the project area. Arsenic contamination is generally not

present in the project area.

B. Ecological Resources

1. Terrestrial Ecosystem

72. **Terrestrial flora.** The ecological setting is mostly settled countryside with typical homestead and roadside vegetation. The village homes are usually concealed by lush green foliage of wide variety of trees, thickets of bamboo and banana plants. A characteristic feature of the landscape is the presence of variety of plant and fruit trees. There are no extensive forested areas in the near vicinity, yet tree cover from cultivated species could be as high as 50% in some areas. There is no natural forest located alongside any of the subproject road of Gazipur Upazila. Only roadside trees are found which are largely maintained by the community or social forestry program. Main crops grown inside the subproject area include paddy, jute, peanut, onion, garlic, chilli and other vegetables.

73. **Terrestrial fauna.** The diversified habitat and ecosystem in the proposed area support various types of local birds and animals. Magpie Robin, the national bird of Bangladesh which is commonly known as “Doyel” is frequently found in the subproject area. The wildlife like frogs, toad, snakes, lizards, tortoise, jackals, rats, shrew, squirrel and bats are common in Gazipur area. No rare and endangered species of flora and fauna have been reported in the subproject. No wild animals inhabit the area.

2. Aquatic Ecology

74. **Aquatic flora.** In the shallow water of the floodplains, ponds and swamps of the subproject area, various hydrophytes and floating ferns grow in abundance. Tall grasses present a picturesque site near the bank of rivers and the marshes. Different types of aquatic flora species were recorded in the study areas. The most abundant hydrophytes in the project area are Kochuripana (*Eichhornia crassipes*), Topapana (*Pistia stratiotes*), Khudipana (*Lemna minor*) Pata Jhajji (*Vallisneria spiralis*), Shapla (*Nymphaea sp.*), Kolmi (*Ipomoea aquatica*), Helenchaa (*Enhydra fluctuant*), and Duckweed (*Spiredella sp.*). Numerous algae (e.g. *Spirogyra* and *Scytonema*) and amphibian plant, Dhol kolmi (*Ipomoea fistulosa*) are also found in the road side water bodies.

75. **Aquatic fauna.** The temporary aquatic habitat of the khals and beels have usual aquatic plants and weeds and the fauna include fishes and crustaceans. The common fish species includes carps (*ruia*, *katla*, *mrigal*, *silver carp*, *grass carp*, *karpio* etc.), *barbs* (*putis*), *Chitol*, *Folai*, *cattfish* (*Tengra*, *Singi*, *Magur*, *Boal*, *Pungus*, Snakehead (*Shol*, *Taki*), *bele*, etc. and varieties of prawn (*chingri*). The fisheries in the proposed project area comprises of ponds, beels, rivers, flood lands, borrow pits, and canals.

3. Economic Development

76. **Land Use.** As per estimation of Bangladesh Bureau of Statistics (2011), the total cultivated land of Gazipur Upazila is approximately 51,322 hectares, non-cultivated fallow land 7,129 hectares; single crop 10%, double crop 60% and triple crop land 30%. Land under irrigation is 45%. The Reserved Forest covers approx. 266 sq. km area of the Upazila and Forest (notified under Forest Act 4&6) 25,170 sq. km. As regards the ownership of agricultural land – landowner 58.48% and landless 41.52%; cultivable land per head is 0.15 hectare.

77. **Industry and Agriculture.** There are few small and medium size industries of different types (Ricemill, flourmill, Jutemill, cottonmill, papermill, hosiery industry, bakery, bidifactory etc.) and cottage industries (Goldsmith, blacksmith, weaving, wood work, embroidery etc.) in operation in the Upazila area. As observed from field visit at proposed subproject site, no industries were found to encroach the ROW for the proposed development. Main crops grown in the area are paddy, wheat, potato, brinjal, patal, cauliflower, sugarcane and mula (radish). Extinct or nearly extinct crops are kaun and sesame.

78. **Infrastructure, Transport and Communications.** Existing Existing infrastructure in Gazipur Upazila includes many roads that are poorly maintained, degraded in condition and often impassable except at very slow speeds. Itemized these include 366.25 km paved and 8.32 km unpaved road. Regular bus services are available to travel other areas of Bangladesh. Internal movement is met by rickshaw, auto-rickshaw, easybike, maxi (laguna) and rickshaw van.

4. Social and Cultural Resources

79. **Demography.**¹³ The population of Gazipur Upazila is 866540 (male 471768, female 394772; Muslim 817926, Hindu 45068, Buddhist 3185, Christian 188 and others 173). The population density is 1941 persons per sq km, Information obtained from the Upazila suggests that the main occupations of general people are agriculture 17.86%, non-agricultural labourer 2.58%, trade and commerce 19.76%, transport and communication 7.03%, service 32.22%, construction 3.97% and others 16.58%.

80. **Local Market and Bazar.** There are 26 Hats and Bazars and 14 fairs, most noted of which are Tongi Bazar, Pubail Bazar, Mirzapur Bazar, Kashimpur Bazar, Board Bazar, Salna Bazar, Joydebpur Bazar; Pubail Lakshmi Dashamir Mela, Tongi Shashan Ghat Mela, Dhirashram Shitala Debi Mela, Domer Para Chaitra Samkranti Mela, Koddar Baruni Mela and Joydebpur Rath Mela are notable. It is noteworthy to point out that none of the above Hats and Bazars fall within the proposed subproject road alignment (footnote 13).

81. **Health and Educational Facilities.** There are numerous health facilities, educational and religious institutions within the Upazila : Health centers include - Hospital 25, missionary hospital 1, cancer hospital 1, eye hospital 2, private medical college 1, cardiology hospital 1. Educational institutions include - university 5, medical college 1, college 10, cadet college 1, technical college 17, technical school 10, secondary school 72, primary school 168, madrasa 36. Noted educational institutions: Bangabandhu Sheikh Mujibur Rahman Agricultural University (1993), Islamic University of Technology (1979), Dhaka University of Engineering and Technology (1980), National University (1992), Bangladesh Open University (1993), Rani Bilasmoni Government Boys' High School (1905) and Religious institutions include - Mosque 613, temple 122, church 3. Average literacy rate within the Upazila area is 62.6% (male 67.3%, female 56.8%) (footnote 13).

82. **Water Supply and Sanitation.** There is piped water supply system in the Gazipur subproject area (inside city corporation area) which includes over-head tank 3, home connection 11895, production tubewell 55 and water pipeline 119 km. The source of drinking water supply also includes 1248 tube-wells. The sanitation facilities available within the City Corporation include - improved sanitary latrines 174017, community latrines 96, public toilets 30, twin pit latrines 1934 (footnote 13).

83. **Access to electricity.** All the unions of the upazila are under rural electrification net-work. However 78.48% of the dwelling households have access to electricity.


¹³Banglapedia. The National Encyclopedia of Bangladesh. .

84. **Pollution and Road Safety.** People are concerned about increasing pollution in the subproject area as well as safety of people while crossing the roads. Industries within the subproject road were found discharging the untreated effluent to local drains, canals and water courses which may result in the contamination of the land area and water bodies. Accident is reported to take place now and then on the subproject road due to rough driving as well fast speed and non-availability of safe passage for crossing the road.

5. History, Culture and Tourism

85. The Upazila area is also enriched with archaeological heritage and relics Bhawal Palace, Bhawal Copper Plate, Bhawal Raj Shashan Mandir, Tongi Meer Jumla Bridge, Kripamayai Mandir, Palasona Zamindar Bari (Gachha), Bilashpur (Botolla), Tongi Sonabhan Mosque, Kashimpur Zamindar Bari, Lalshah Tomb (Bhadun), Bharan Rajbari. and with marks of the war of liberation (Memorial monument). These are playing a vital economic role in this Upazila. These archaeological/cultural heritage and relics are generally of local interest and tourist attraction only. None of these sites and structures are included in the list of UNESCO World Heritage Sites or protected monuments by the Bangladesh Department of Archaeology. None of these are located near or along the alignments of the subproject and will not be affected by the proposed roadway improvements. The nearest cultural site Bilashpur (Botolla) is already more than 300 m by straight line distance from the nearest subproject alignments, while Bhawal National Forest and Bhawal Zamindar Bari is already at a distance of about 12 km northeast of the Gazipur Upazila, even as Baliadi Zamindar Bari is more than 15 km northeast and Lal Shah Tomb is about 7 km east of Gazipur Upazila. Based on actual field visits by PMCU in 2017 and 2018, no physical cultural resources are found in the corridor of impacts. **Figure 21** below shows the nearest physical cultural resources and are more than 300 m from the road alignment.

Figure 21: Aerial Map Showing the Locations of Cultural Heritage Sites Relative to the Subproject Alignments

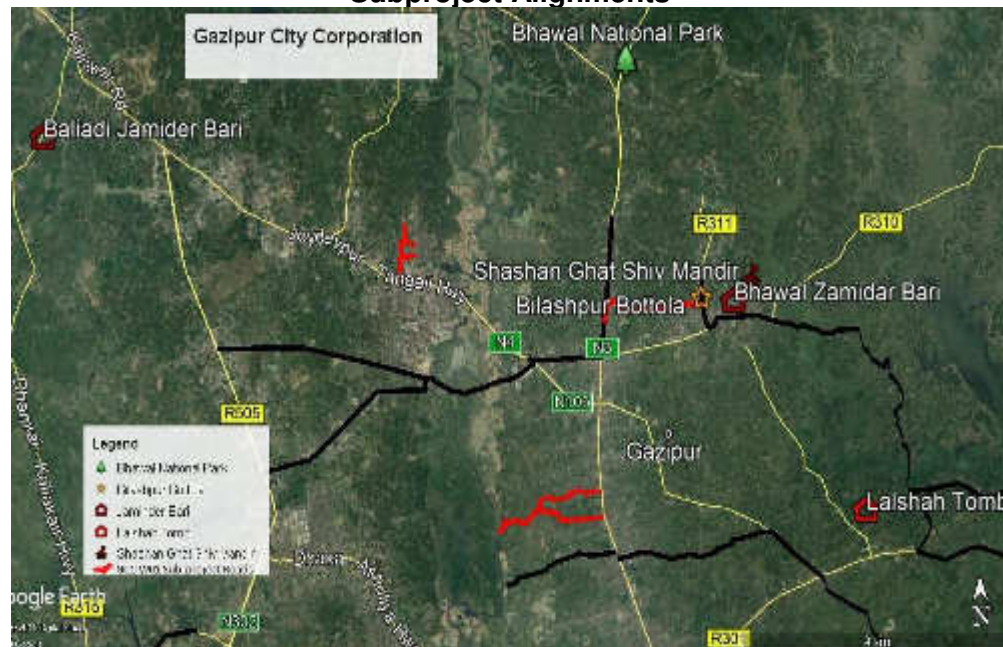



6. Socio-economic benefits from the Road Improvement Schemes

86. Expected outcomes after implementation of the schemes will be:
- Increased property values and revenue income of the Upazila;
 - Improved environmental conditions and reduced environmental pollution risk;
 - Improved tourist potential, providing an enhanced business environment for local businesses and investment;
 - Increased job opportunities in small industries due to expansion of trade and commerce;
 - Increased economic and financial opportunities;
 - Creation of short-term employment opportunities in construction work during the period of implementation;
 - Improved traffic management, public transport and sustainable environmental conditions; and
 - Generation of employment opportunities.
87. **Summary of Environmental Features around the Road Alignments.** To understand the effect of the proposed of the subproject to receptors, information on some important environmental key features for all the four subproject roads have been collected and analyzed. From analysis, these roads reveal more or less similar pattern of environmental features around them. Table 13 summarizes these environmental features.

Table 13: Summary of environmental features around road alignments

Sl. No.	Environmental Features	Within 100 m from centerline of road	Within 7 km from centerline of road
1	Ecological		
a)	Presence of Wildlife Sanctuary/ National Park	No	No
b)	Reserved Forests	No	No
c)	Wetland/water bodies	Small ponds/ditches. None is protected	1 river (Meghna which is more than 6 km away) /ponds and ditches, but none is protected
d)	Migratory route for wild animals	No	No

Sl. No.	Environmental Features	Within 100 m from centerline of road	Within 7 km from centerline of road
e)	Migratory routes for birds	No	No
f)	Migratory routes for fishes	Yes(during rainy season)	Yes (during rainy season)
g)	Presence of Dolphin	No	No
h)	Tree/vegetation cover	Yes. Moderate trees and vegetation. No threatened or endemic tree.	Yes.Moderate trees and vegetation. No threatened or endemic tree.
i)	Birds Nesting	Yes. On trees along the sides of road alignments and trees within the 100 meter distance, birds may also nest.	Yes. On trees along the sides of road alignments and trees within the 7 km distance, birds may also nest.
2.	Archaeological Monuments	No	No
3.	Groundwater	Available at low depth, drinking water at about 50 m below ground.	Available at low depth, drinking water at about 50 m below ground.
4.	Land Use	Agricultural, Rural Settlement, Urban Settlement, Commercial, Industrial	Agricultural, Rural Settlement, Urban Settlement, Commercial, Industrial, Some Rural Community Forests (not protected forests).
5.	Physical Cultural structures and social	Road in some areas passes through few religious structures and/ or graveyard located near the road alignments. However, none of these will be affected.	Road passes through rural-urban and peri-urban areas. Few religious structures and/ or graveyard located near the road alignments.

km = kilometer, m = meter.

Source: PMCU/LGED field surveys conducted in 2017 and 2018.

7. Baseline and Projected Climate

88. A climate change vulnerability and disaster risk assessment were conducted for the various subprojects under the project.¹⁴ Results of this assessment have been used to design the various subprojects, including the Gazipur City Corporation roads subprojects. The baseline climate and future projection at 2050 Tmax and Rainfall for Gazipur for RCP 6.0 are shown in **Table 14** which demonstrate that the temperature is expected to increase in the future. Changes of both temperature and rainfall are shown in **Table 15**

Table 14: Baseline data and projection for 2050 of Tmax and Rainfall for Gazipur

Month	Baseline		Future	
	Max Temp (degree C)	Rainfall (mm)	Max Temp (degree C)	Rainfall (mm)
January	26.0	9	29.3	10
February	28.7	20	30.1	24
March	32.4	57	33.5	57
April	34.5	144	35.6	177
May	33.4	258	34.0	275
June	31.9	381	32.6	407
July	31.1	379	32.0	431

¹⁴ LGED. 2017. Climate Change Vulnerability and Disaster Risk Assessment: Design Options for Dhaka City Region Roads Subprojects. CRDP-II.

August	31.4	325	32.3	330
September	31.7	257	33.3	205
October	31.3	157	33.5	158
November	29.1	35	31.1	39
December	26.6	5	29.6	0
Year	30.7	2027	32.2	2113

Table 15: Changes of Tmin and Tmax (0C) and Rainfall (mm) in Gazipur

Month	Tmin	Tmax	Mean	Rainfall	% Change in rainfall	Seasonal
Jan	2.2	3.3	2.75	1	11	0% (DJF)
Feb	1.6	1.4	1.5	4	20	
Mar	1.3	1.1	1.2	0	0	11% (MAM)
Apr	2.3	1.1	1.7	33	23	
May	1.6	0.6	1.1	17	7	
Jun	1.1	0.7	0.9	26	7	7 % (JJA)
Jul	1.6	0.9	1.25	52	14	
Aug	1.4	0.9	1.15	5	2	
Sep	1.5	1.6	1.55	-52	-20	-10%(SON)
Oct	2.5	2.2	2.35	1	1	
Nov	1.8	2	1.9	4	11	
Dec	1.1	3	2.05	-5	-100	

89. For roads, the critical climate parameter is precipitation in terms of volume and intensity, and their impact on occurrences of flooding depending on location. In combination with geology and geography, a related variable is soil moisture as it affects road foundation stability.

90. Hot days temperature is also an important road design consideration, particularly for asphalt roads, due to its effect on stiffness of the pavement. The stiffness modulus of asphalt is affected by temperature. Migration/bleeding of liquid asphalt is a concern at sustained air temperatures above 32°C. For concrete roads, the range of temperature variation determines the proper width of joints, including the composition of the joint sealants.

91. For bridges, the critical design parameter derived from precipitation and catchment characteristics is flood level, which determines the required vertical clearance of the bridge deck.

V. ASSESSMENT OF ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

A. Compliance with subproject selection criteria

92. The subproject was selected based on the selection criteria in the environmental assessment and review framework (EARF) of the project.. **Table 16** below is a summary of the assessment of compliance with the subproject selection criteria under the project.

Table 16: Compliance matrix with subproject selection criteria

Criteria	Remarks
1) Complies with all requirements of relevant national, state and local laws, rules and regulations.	Being complied on ongoing basis.
2) Complies with all requirements of ADB Safeguards Policy Statement (SPS) 2009, and follow procedures set down in the environmental assessment and review framework (EARF).	Being complied on ongoing basis.
3) Does not trigger environmental category A per ADB SPS. In particular, does not encroach any sensitive areas and/or critical habitats per definition of ADB SPS, and does not cause significant adverse environmental impacts that are irreversible, diverse, or unprecedented, which may affect an area larger than the sites or facilities subject to physical works.	Complied.
4) Does not include and/or involve any activities listed in ADB's Prohibited Investment Activities List (Appendix 5 of ADB SPS). These activities do not qualify for ADB's financing.	Complied.
5) Avoids any work in or near environmentally sensitive locations, including sites with national or international designation for nature conservation, cultural heritage, or any other reason.	Complied.
6) Does not result in destruction of or encroachment onto physical cultural resources such as archaeological monuments; heritage sites; and movable or immovable objects, sites, structures, groups of structures, and natural features and landscapes that have archaeological, paleontological, historical, architectural, religious, aesthetic, or other cultural significance.	Complied.
7) Alignments or project locations avoid or minimize, when avoidance is not possible, the cutting of trees. Include provisions for compensatory plantation at ten trees per every tree to be cut.	Complied. Included in the environmental management plan (EMP).
8) Reflects inputs from public consultation and disclosure for site selection.	Complied. Also, to be complied in future consultations. The initial environmental examination (IEE) provides for this criterion.
9) All the road works shall be designed to blend in with the environment.	Complied.
10) Does not lead to alteration of surface water hydrology of streams/waterways that may result in increased sediment load due to erosion from construction sites.	Complied. Included in the EMP.
11) Provides for appropriate protection/mitigation measures to address noise impacts on adjoining communities, especially sensitive receptors as schools/hospitals along the roads.	Complied. Included in the EMP.
12) Ensure requirements for drainage maintenance measures are incorporated into the operations and maintenance manual and suitable budget allowed for to ensure ongoing performance of measures.	Complied. Included in the EMP.

Criteria	Remarks
13) For subproject components that may affect natural streams or rivers, all comments and advice received from project management coordination unit (PMCU), project implementation unit (PIU), design engineers, and appropriate departments are incorporated into the planning, design and construction of the subprojects as far as practicable.	Being complied on ongoing basis.
14) Provides for appropriate protection/mitigation measures to address noise impacts on adjoining communities, especially sensitive receptors as schools/hospitals along the roads.	Complied. Included in the EMP.
15) Ensure requirements for drainage maintenance measures are incorporated into the operations and maintenance manual and suitable budget allowed for to ensure ongoing performance of measures.	Complied. Included in the EMP.
16) Ensures detailed designs and environmental safeguards conditions are included in the planning.	Complied. Included in the EMP.
17) Provides for (i) capacity building of PIU staff composting plant operation and maintenance, and (ii) market study on the users of compost to assess sustainability of the demand for such compost.	Complied. Included in the EMP.

B. Anticipated Impacts and Mitigation Measures - Planning, Location and Design Phase

93. **Impacts due to location.** These Impacts are associated with planning particularly on the site selection. They include impacts due to encroaching on sensitive areas and impacts on the people who might lose their homes or livelihoods due to the development of the proposed site. However, in the case of the road subproject, no significant impacts are anticipated since the road construction and/or rehabilitation works will be done on existing road alignments with ROW and located in built up areas. There will be no road widening works that will encroach any private property. The road shoulders or footpaths to be constructed and/or rehabilitated are also within existing ROW.

94. **Impacts due to Climate Change.** The impact of climate change is high for the road subproject. The design of the roads and other related infrastructures should consider future changes in climate patterns such as flooding due to extended monsoon seasons and increased level of precipitation, droughts, and increased global temperature, among others. More particularly for the subproject, the planning and design of the subprojects should consider the following:

- (i) Likely changes in the climatic conditions with respect to temperature, flooding, salinity, and acidity, including drainage aspects; and
- (ii) Likely impacts on road surfaces and runoff due to climate change-induced heavier and more erratic rainfall.

95. **Mitigation Measures.** The impacts of climate change will be mitigated upfront during the design and planning stage for the infrastructures. Among these measures are the following:

- (i) Due to climate change, the river water level will rise and as a result, the bridge clearance will be lower. Therefore, consideration of increase bridge height is required;
- (ii) The differences in water level between base and future time should be computed as it is needed to estimate the additional road embankment height required in making the roads safer against climate change-induced flooding;
- (iii) The proposed road area might have to drain a significant additional discharge due to climate change-induced higher rainfall during extreme events. Therefore, adequate number of drainage facilities along with comparatively larger openings should be considered in structure for the proposed road; and

- (iv) Maximum possible efforts have to be made for minimizing cutting of trees while designing widening option for the proposed road.

96. Apart from the above climate change considerations in the design of the subproject, the other impacts, issues, concerns and mitigation measures during the design phase are illustrated in **Table 17** below.

Table 17: Issues, Concerns and Mitigation Measures During Design Phase

Project Activity	Potential Environmental Impacts	Proposed Mitigation Measures	Responsibility
Detailed design			
Incorporation of sloped areas in subproject design	Soil erosion and slope instability	<ul style="list-style-type: none"> • Incorporate measures and sites for handling excessive spoil materials • Incorporate drainage plan in final design 	PMCU, PDSC
Incorporation of community health and safety measures in the design	Road accidents	<ul style="list-style-type: none"> • Ensure to include in the design the following: (i) road signages in critical areas or curves, (ii) speed limiters such as humps, (iii) barricades or similar structures in accident-prone areas, and (iv) pedestrian crossing lanes, among others. 	PMCU, PDSC
Location trees, utilities and other infrastructures before construction.	Disruption of utility services; False claims from people; Water quality changes due to construction. Interference with other utilities and other infrastructures, including heritage areas, if any, during construction	<ul style="list-style-type: none"> • Avoid alignments that will run over trees and utilities such as electric poles, etc. • Innovate and design footpaths that will avoid cutting of trees. • Provide budget for restoration/replacement of damaged utilities • Provide budget for tree planting as replacement activity for cut trees, if any. • Avoid placing alignment near heritage buildings and religious structures. • Photograph all sites within heritage areas to enable before and after comparison (note: all roads are to be reinstated to original character especially in heritage areas) • Ensure compliance with any Department of Archaeology rules during design. 	PMCU, PDSC
Construction in the vicinity of residential areas	Nuisance to nearby receptors. Impacts to qualities of ambient air, surface water, groundwater, and land.	<ul style="list-style-type: none"> • Ensure compliance with national or international standards on noise, ambient air and effluent, whichever are more stringent. • Ensure all bid and contract documents prepared and finalized 	PMCU, PDSC

Project Activity	Potential Environmental Impacts	Proposed Mitigation Measures	Responsibility
	Impacts to health and safety of community and workers.	have copy of the IEE as attachment.	
Operation and maintenance (O&M) Manual preparation	Impacts to health and safety of community.	<ul style="list-style-type: none"> • Prepare a comprehensive O&M manual to include periodic inspection and maintenance of roads, conduct of road repairs, etc. 	PMCU, PDSC
Site selection of sources of construction materials such as sand and gravels.	Extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion; Disturbance in natural drainage patterns, ponding and water logging, and water pollution.	<ul style="list-style-type: none"> • Procure construction materials such as sand, gravels, or aggregates from government-authorized dealers only. • If quarrying is to be the source, ensure to conduct at sites authorized by the government such as the Bangladesh Water Resources Development Board for sand quarrying. 	PMCU, PDSC
Spoil management and disposal	Inappropriate disposal of spoils will cause nuisances to affected properties, including siltation of canals.	<ul style="list-style-type: none"> • Identify designated disposal sites approved by the upazila. • A spoil management plan will be developed. 	PMCU, PDSC
Construction camps	Inappropriate location for construction camps will impact the general welfare and health and safety of the workers.	<ul style="list-style-type: none"> • Identify construction camp sites that are strategically located relative to the work sites. • Ensure these camp sites can be easily provided with the basic amenities for the workers. 	PMCU, PDSC

C. Anticipated Impacts and Mitigation Measures – Construction Phase

97. In the case of this subproject, environmental impacts during construction phase will not be severe because: (i) most of the component works are relatively small and involve straightforward construction, so impacts will be mainly localized and not greatly significant; (ii) most of the predicted impacts are associated with the construction process, and are produced because of the invasive nature of excavation activities and earth movements; and (iii) being located in the built-up area of the rural and urban areas, will not cause direct impact on biodiversity values.

1. Construction Method.

98. The civil works for road construction and/or rehabilitation include earth work excavation. Earth work excavation will be undertaken using various heavy equipment such as bulldozers, backhoes, dump trucks, compactors, etc. Excavation and construction activities will be done through segmentation or chainage-wise planning with around 100m - 200m per segment or stretch. This will ensure that impacts can be easily managed by the contractor.

99. **Non-Compliance with Environmental Legislation.** This issue will arise when there is a

lack of awareness among subproject staff and management of environmental safeguard requirements, compliance with the requirements, conditions specified in the IEE report, approval status, and consent.

100. Mitigation measures include (i) capacity strengthening of the PMCU Environmental Officer and the counterpart PIU focal persons on environmental safeguards; and (ii) ensuring that necessary permits are obtained.

2. Impact on Physical Resources

101. **Topography, Soils & Geology.** Subproject activities are not large enough to affect these features; so there will be no impacts.

102. **Sources of Materials.** Significant amount of gravel, sand and aggregate, will be required for this subproject. The contractor will be required to:

- (i) Prepare Aggregates Management Plan as part of the SEMP;
- (ii) Source aggregates only from entities with environmental clearances and license;
- (iii) Use quarry sites and sources permitted by relevant government agencies only, such as the Bangladesh Water Resources Development Board for sand quarrying;
- (iv) No new quarry sites shall be used for the subproject;
- (v) Verify suitability of all material sources and obtain approval of implementing agency; and
- (vi) Document all sources of materials and include in the monthly reporting to the PIU.

103. **Air Quality.** While most construction works will be conducted during the dry season, there is potential for creating dust from (i) excavation of dry soil and backfilling, (ii) transport, loading and unloading of natural aggregates; (iii) movement of construction-associated vehicles; (iv) on-site rock crushing and concrete mixing; (v) emissions from construction vehicles, equipment, and machinery used for excavation and construction, which may contain pollutants such as carbon monoxide, sulphur oxides, particulate matter, nitrous oxides, and hydrocarbons, and (vi) burning of firewood for cooking and heating in work and labor camps.

104. To mitigate the impacts, contractors will be required to:

- (i) follow World Bank's Environmental Health and Safety (EHS) Guidelines on Construction and Decommissioning Activities;¹⁵
- (ii) confine earthworks according to excavation segmentation plan that should be part of site-specific environmental management plan (SEMP);
- (iii) prepare and implement a dust management plan that should be part of the SEMP;
- (iv) consult with PIU on the designated areas for stockpiling of sand, gravel, and other construction materials (ideally about 500 m from residential areas);
- (v) bring construction materials (aggregates, sand, etc.) to the construction site as and when required to avoid heavy stockpiling at the sites;
- (vi) damp down with water dry exposed surfaces and stockpiles of aggregates at least twice daily, or as necessary;
- (vii) if re-surfacing of disturbed roads cannot be done immediately, spread crushed gravel over backfilled surfaces;

¹⁵ IFC World Bank Group. 2007. [*Environmental, Health, and Safety \(EHS\) Guidelines – General EHS Guidelines: Construction and Decommissioning.*](#)

- (viii) during demolition, water exterior surfaces, unpaved ground in the immediate vicinity and demolition debris;
- (ix) place signage at active work sites in populated areas;
- (x) require trucks delivering aggregates and cement to have tarpaulin cover;
- (xi) clean wheels and undercarriage of vehicles prior to leaving construction sites;
- (xii) limit speed of construction vehicles on access roads and work sites to a maximum of 30 km/h;
- (xiii) prohibit burning firewood in work and labor camps (promote liquified petroleum gas for cooking purposes and electric heater for heating purposes);
- (xiv) use vehicles that have government-issued permits and registrations; and
- (xv) prohibit open burning of solid waste.

105. **Noise Levels.** Noise-emitting construction activities include earthworks, concrete mixing, demolition works, movement and operation of construction vehicles and equipment, and loading and unloading of coarse aggregates. The significance of noise impact will be higher in areas where noise-sensitive institutions such as health care and educational facilities are situated. Noise levels should not exceed the national standards for noise or WHO noise level guidelines, whichever is more stringent, or result in increase in background noise level of 3 decibels at the nearest receptor location off-site.¹⁶ The comparative illustration of national standards versus WHO guidelines is in of section .II

106. To mitigate the impacts, contractors will be required to:
- (i) provide prior information to the local public, including institutions such as schools and hospitals, about the work schedule;
 - (ii) use equipment that emits the least noise, well-maintained and with efficient mufflers. Install silencers if necessary and practical;
 - (iii) restrict noisy activities to day time;
 - (iv) avoid use of noisy equipment or doing noisy works at night time;
 - (v) limit engine idling to a maximum of one minute;
 - (vi) spread out the schedule of material, spoil and waste transport;
 - (vii) minimize drop heights when loading and unloading coarse aggregates; and
 - (viii) not use horns unless it is necessary to warn other road users or animals of a vehicle's approach.

107. **Surface Water Quality.** Some sections of the road alignments are located along or cross water bodies, exposing these water bodies to risks of pollution caused by: (i) poorly managed construction sediments, and waste materials; (ii) poor sanitation practices of construction workers; and (iii) improper storage of petroleum products or chemicals used during construction such as fuel, oil and lubricants. Although construction works will be scheduled during dry season, any unavoidable excavation or construction works during monsoon season will wash down these pollutants to the water bodies.

108. To mitigate these impacts, the contractor will be required to:
- (i) follow World Bank's EHS Guidelines on Construction and Decommissioning Activities (footnote);
 - (ii) dispose excess spoils per the Spoil Management Plan attached in **Appendix 6**;

¹⁶ IFC World Bank Group. 2007. .

- (iii) locate temporary storage areas on flat grounds and away from main surface drainage routes (ideally at least 100 m from surface water);
- (iv) shield temporary storage areas with sandbags;
- (v) provide adequate water supply and sanitation facilities at work sites;
- (vi) provide impervious bunded areas with 110% volume for storage of petroleum products used during construction, such as fuel, oils, and lubricants;
- (vii) provide orientation and training to assigned workers on the correct handling of petroleum-based products, clean -up of equipment, and response measures in case spills or emergencies using a well prepared emergency response plan; and
- (viii) ensure no refueling within 100 m from surface water.

109. For management and final disposal of solid wastes following mitigation, contractors will be required to apply the follow-up measures such as:

- (i) follow World Bank's EHS Guidelines on Construction and Decommissioning Activities (footnote);
- (ii) collection of recyclable solid wastes and supply to scrap vendors;
- (iii) ensure all the camp wastes and construction wastes are placed in the designated waste collection pits (lined to ensure no seepage of leachate) away from receiving water;
- (iv) establishment of separate bunded and lined areas with 110% volume for the storage of all the toxic material wastes, including batteries, oil filters, mobil, burnt oils, etc. at the construction site; and
- (v) consultation with PIU on the proper disposal of all residual wastes.

110. **Groundwater.** Subproject activities do not interfere with groundwater regime. No groundwater abstraction is proposed, and all activities are limited on land surface activities. Groundwater quality will not be impacted by the subproject.

111. However, as a precautionary measure, the mitigation measures for avoiding seepage of pollutants to the groundwater will be in place. Contractors will be required to :

- (i) follow World Bank's EHS Guidelines on Construction and Decommissioning Activities (footnote);

112. provide impervious bunded areas with 110% volume for storage of petroleum products used during construction, such as fuel, oils, and lubricants. This will ensure these chemicals will not seep into the ground and eventually affecting groundwater quality; and

- (ii) no toilets shall be put up within 500 m from groundwater wells, if any.

113. **Landscape and Aesthetics.** The construction work is likely to generate considerable quantities of waste soil. Indiscriminate disposal of the soil and waste, excess construction material, concrete, packing materials, containers, lubricants and oils may affect the landscape and aesthetics of local environment.

114. These impacts are negative but short-term and reversible by mitigation measures. As mitigation measures, contractors will be required to:

- (i) dispose excess spoils per the Spoil Management Plan attached in **Appendix 6**;
- (ii) avoid stockpiling of excess excavated soils as far as possible;
- (iii) avoid disposal of any debris and waste soils in or near water bodies/rivers;

- (iv) coordinate with PIU for beneficial uses of excess excavated soils or immediately dispose to designated areas;
- (v) recover used oil and lubricants and reuse or remove from the sites;
- (vi) manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas; and
- (vii) remove all wreckage, rubbish, or temporary structures which are no longer required;

115. **Impact on Ecological Resources.** Subproject sites are located within the town area. There is no biodiversity or natural habitat in these sites. As such, no impacts on ecological resources is envisaged.

116. **Impacts on Terrestrial Ecology.** Haphazard site clearing, parking, and movement of construction vehicles and equipment stockpiling, will result in disturbance to the land in the subproject area. However, the subproject area does not include any forest, so the impacts to flora and fauna will be minimal. For trees found along the alignments that will be used for footpaths or drains, the design will ensure that these trees will not be cut.

117. To mitigate these impacts, contractors will be required to:

- (i) avoid, or minimize when avoidance is not possible, tree cutting;
- (ii) for any tree cut, conduct replacement planting at a ratio of 1:10 consistent with the approved EARF for the project and social forestry program of LGED (see **Appendix 7** for LGED Tree Plantation Program);
- (iii) protect giant trees and locally-important trees (for religious reasons), if any, during implementation;
- (iv) prevent workers or any other person from removing and damaging any flora and fauna found in the subproject sites; and
- (v) prohibit employees and workers from poaching animals and cutting of trees for firewood at the subproject sites or their vicinities.

118. **Impacts on Aquatic Ecology.** Some of the subproject sites are near or adjacent to ponds of khals (canals) that have been formed as water bodies and serve as catchment of rainwater during monsoon season. Through the years, these ponds and khals are utilized as fish ponds of the local communities. All aquatic animals in these ponds are not protected species and are grown for livelihood and income purposes by the local communities. Nevertheless, the construction of the subproject may affect these ponds due to siltation and therefore may impact the quality of the water and eventually the productivity and harvest of these aquatic resources.

119. To mitigate this impact, contractors will be required to:

- (i) provide temporary protection at sections adjacent or near ponds or khals to avoid sliding of soils;
- (ii) store spoils away from these ponds to avoid being washed down the ponds or khals (ideally at least 100 m from the surface water); and
- (iii) not undertake construction works near these sites during the spawning and breeding period between June and September.

120. **Impacts to traffic flow.** During construction, few disturbances will occur. Mitigation measures include the preparation and implementation of a traffic management plan in coordination with local authorities and PIU. The traffic management plan shall include the following: (i) installation of clear signages; (ii) barricades; (iii) lightings at night; and (iv) markers to direct traffic movement in sites, among others.

121. **Impacts on physical cultural resources.** The subproject will not encroach into or run over any physical cultural resources. Strip maps showing alignments with physical cultural resources, specifically religious establishment, are shown in **Appendix 8**. As well, the subproject area is not a potential archaeological area and therefore no impact is envisaged. However, as a precautionary approach, the contractor will be required to:

- (i) strictly follow the protocol by coordinating immediately with PIU and Bangladesh Department of Archaeology for any suspicion of chance finds during excavation works;
- (ii) stop work immediately to allow further investigation if any finds are suspected; and
- (iii) request authorized person from the Bangladesh Department of Archaeology to observe when excavation resumes for the identification of the potential chance find, and comply with further instructions.

122. **Impacts on the socioeconomic, environment and resources.** The impacts will result from excavation works, stockpiling, the operation of construction vehicles and equipment, and

accidental damage to utilities (e.g., power supply poles, open drains, and water taps or hoses). The potential impacts include disturbance to economic activities, particularly to the businesses operating along the alignments of construction works.

123. To mitigate these impacts, the contractor will be required to:
- (i) prepare a traffic management plan in collaboration with local authorities;
 - (ii) where traffic congestion will likely occur, place traffic flagmen during working hours;
 - (iii) avoid full road closures by applying section-wise and/or chainage-wise approach during excavation, concreting and/or curing periods;
 - (iv) if full road closure is not possible especially on very narrow roads, ensure that alternate routes are identified and that affected residents and establishments are informed prior to conducting the construction activities;
 - (v) provide appropriate compensation to qualified affected people or businesses per approved resettlement plan for the subproject;
 - (vi) manage stockpile;
 - (vii) manage pumped water from excavations either to drains or drums for later use;
 - (viii) relocate the affected power supply poles, and
 - (ix) advise the concerned authority during accidental damage to utilities.

124. **Community health and safety hazards.** Communities will be moderately exposed to threats due to impacts on air and water quality, ambient noise level; mobility of people such as the children and elderly, goods, and services; accesses to properties, economic activities, and social services; service disruptions, etc. Construction workers may potentially bring communicable diseases in the community.

125. To mitigate these impacts, the contractor will be required to implement its approved SEMP, which should include a community health and safety plan following international best practices on community health and safety such as those in Section 4.3 of World Bank EHS Guidelines on Construction and Decommissioning Activities.¹⁷ As a minimum and whichever is applicable, the community health and safety plan shall ensure the following:

- (i) implement risk management strategies to protect the community from physical, chemical, or other hazards associated with sites under construction and decommissioning;
- (ii) restricting access to the site, through a combination of institutional and administrative controls, with a focus on high risk structures or areas depending on site-specific situations, including fencing, signage, and communication of risks to the local community;
- (iii) removing hazardous conditions on construction sites that cannot be controlled affectively with site access restrictions, such as covering openings to small confined spaces, ensuring means of escape for larger openings such as trenches or excavations, or locked storage of hazardous materials; and
- (iv) implement measure to prevent proliferation of vectors of diseases at work sites;
- (v) adequate space and lighting, temporary fences, shining barriers and signage at active work sites;
- (vi) contractor's preparedness in emergency response;

- (vii) adequate dissemination of GRM and contractor's observance and implementation of GRM; and
- (viii) upon availability, local people should be given an opportunity for work in the subproject activities.

126. **Occupational health and safety hazards.** Workers will be exposed to the crosscutting threats of the impacts above during construction. Inadequate supply of safe and potable water and inadequate sanitation facilities; poor sanitation practices on site; poor housing conditions; the handling and operation of construction equipment; handling of hazardous substances; exposure to extreme weather and non-observance of health and safety measures pose additional threats to the health and safety of construction workers. Construction workers may be potentially exposed to communicable and transmittable diseases in the community and the workforce.

127. To mitigate these impacts, contractors will be required to implement its approved SEMP, which should include an occupational health and safety plan following international best practices on occupational health and safety such as those in Section 4.2 of World Bank EHS Guidelines on Construction and Decommissioning Activities (footnote xx). As minimum and whichever are applicable, the occupational health and safety plan shall ensure the following:

- (i) Communication and Training
 - a) Training of all workers on occupational health and safety prior to construction works;
 - b) Conduct of orientation to visitors on health and safety procedures at work sites;
 - c) Signages strategically installed to identify all areas at work sites, including hazard or danger areas;
 - d) Proper labeling of equipment and containers at construction and storage sites; and
 - e) Suitable arrangements to cater for emergencies, including: first aid equipment; personnel trained to administer first aid; communication with, and transport to, the nearest hospital with an accident / emergency department; monitoring equipment; rescue equipment; firefighting equipment; and communication with nearest fire brigade station;
- (ii) Physical Hazards
 - a) Use of personal protective equipment by all workers such as earplugs, safety shoes, hard hats, masks, goggles, etc. as applicable, and ensure these are used properly;
 - b) Avoidance of slips and falls through good house-keeping practices, such as the sorting and placing loose construction materials or demolition debris in established areas away from foot paths, cleaning up excessive waste debris and liquid spills regularly, locating electrical cords and ropes in common areas and marked corridors, and use of slip retardant footwear;
 - c) Use of bracing or trench shoring on deep excavation works;
 - d) Adequate lighting in dark working areas and areas with night works;
 - e) Rotating and moving equipment inspected and tested prior to use during construction works. These shall be parked at designated areas and operated by qualified and trained operators only;
 - f) Specific site traffic rules and routes in place and known to all personnel, workers, drivers, and equipment operators; and

- g) Use of air pollution source equipment and vehicles that are well maintained and with valid permits;
- (iii) General Facility Design and Operation
- a) Regular checking of integrity of workplace structures to avoid collapse or failure;
 - b) Ensuring workplace can withstand severe weather conditions;
 - c) Enough work spaces available for workers, including exit routes during emergencies;
 - d) Fire precautions and firefighting equipment installed;
 - e) First aid stations and kits are available. Trained personnel should be available at all times who can provide first aid measures to victims of accidents;
 - f) Secured storage areas for chemicals and other hazardous and flammable substances are installed and ensure access is limited to authorized personnel only;
 - g) Good working environment temperature maintained;
 - h) Worker camps and work sites provided with housekeeping facilities, such as separate toilets for male and female workers, drinking water supply, wash and bathing water, rest areas, and other lavatory and worker welfare facilities; and
 - i) Maintain records and make reports concerning health, safety and welfare of persons, and damage to property. Take remedial action to prevent a recurrence of any accidents that may occur.

D. Anticipated Impacts and Mitigation Measures – Operation and Maintenance Phase

128. **Impacts to community health and safety.** Once in operation, the improved roads may result to elevated noise level and air emissions from increased vehicular traffic. Increase in carbon monoxide, sulphur oxides, particulate matter, nitrous oxides, and hydrocarbons in the air is expected. The construction and rehabilitation of the roads will give way to much faster vehicle speeds which could endanger people, especially the children and elderly persons, and households along the road alignments. Damage to the roads may also cause accidents to passing vehicles and may inflict harm to the local people.

129. To mitigate these impacts, the PIU will be required to:

- (i) Conduct regular inspection of the roads to check for damages, and undertake rehabilitation measures for any damages found;
- (ii) Inspect and maintain the integrity of road barriers, especially at critical curves or locations that are prone to vehicular accidents;
- (iii) Inspect and maintain speed limiters such as humps installed on road sections near residential areas, schools, and religious establishments;
- (iv) Inspect and maintain all road signages, including appropriate warning signages at silent zones, and ensure that these are reflectorized and visible even during night time;
- (v) Ensure pedestrian crossings and other safety measures to protect children and elderly persons, are maintained; and

- (vi) Continuing driver education/awareness campaigns and road safety campaigns in schools.

VI. CONSULTATION, INFORMATION DISCLOSURE, AND GRIEVANCE REDRESS MECHANISM

A. Consultation

130. Stakeholder consultation and participation was an essential process during subproject preparation. The process of engaging stakeholders and affected people involved key informant interviews, on-site discussions and random field interviews of stakeholders.

131. **Preliminary Consultation.** Public consultations were conducted in January 2018 and March 2018 which were attended by various stakeholders. The summary of consultation meeting is attached as **Appendix 9**. The following are some of the concerns discussed:

- (i) Local people will support the project activities;
- (ii) The main issue arising from the consultation is that the people of this area suffer huge traffic congestion due to movement of heavy container truck. They cannot easily move to the school, hospital, and working places from their residences due to congestion. Hence, the people will benefit from the subproject, especially those who are residing alongside the roads;
- (iii) The area is dominated by businesses and is about 70%. The people in this area depends largely on these businesses, while the rest on services and agricultural cultivations;
- (iv) During the construction period short term, the consultees believe that community activities will be affected. However, the PIU explained that the project will ensure measures shall be put in place to avoid any negative impact to the community;
- (v) It was emphasized that no resettlement and land acquisition will be required for the project. However, compensations will be provided to affected persons who will be temporarily disrupted of their businesses during construction;
- (vi) It was confirmed with the local stakeholders that there is no protected areas in and around the project areas;
- (vii) The project will never impact on natural water body and not contaminate the soil resources. It was explained that the project will implement appropriate mitigation measures to ensure the natural water bodies in the area will not be negatively impacted; and
- (viii) The participants assured that they welcome the project, and will support/cooperate in all stages of the project works.

132. **Future consultations during final detailed design stage.** The stakeholder consultations during the final detailed design stage will continue to discuss about the subproject, including the implementation of the EMP and SEMP developed for the subproject. PMCU, PIU and PDSC will ensure that consultations will be conducted as meaningful per definition of ADB SPS (footnote 17). Gazipur PIU will ensure that these consultations include participation of the representatives of institutional establishments along the subproject road alignments such as schools, hospitals, and religious establishments and mosques. These religious establishments or mosques are identified in **Appendix 8**.

B. Information Disclosure

133. Information shall be disclosed through public consultation and more formally by making documents and other materials available in a form and at a location in which they can be easily accessed by stakeholders. This normally involves making draft reports available for the public in

the subproject locations and providing a mechanism for the receipt of comments, and making documents available more widely by lodging them on ADB and LGED websites. LGED through the PMCU will submit to ADB the following documents for disclosure on ADB's website:¹⁸

- (i) the final IEE report;
- (ii) new or updated IEE reports and corrective action plan prepared during project implementation, if any; and
- (iii) semi-annual environmental monitoring reports.

134. PMCU will provide relevant environmental information, including information from the relevant documents in a timely manner, in an accessible place and in a form and language(s) understandable to affected people and other stakeholders. For illiterate people, other suitable communication methods will be used.

135. For the benefit of the community, the summary of the IEE will be translated in Bangla and made available at: (i) office of PMCU; and (ii) offices of the Gazipur PIU. Hard copies of the IEE will be available in the PMCU and Gazipur PIU, and accessible to citizens as a means of disclosing the document and at the same time creating wider public awareness. On demand, the person seeking information can obtain a hard copy of the complete IEE document at the cost of photocopy from the offices of the PMCU or Gazipur PIU, on a written request and payment for the same to the Project Director. Electronic version of the IEE will be placed in the official website of LGED after approval of the documents by Government and clearance from ADB. PMCU will issue notification on the disclosure mechanism in local newspapers, ahead of the initiation of implementation of the project, providing information on the project, as well as the start dates, etc. The notice will be issued by the PMCU and Gazipur PIU in local newspapers one month ahead of the implementation works. This will create awareness of the project implementation among the public. PMCU and Gazipur PIU will consider other additional means of information disclosure depending on practicability, such as the distribution of posters to libraries within the locality to mass campaign the basic tenets of the IEE.

C. Grievance Redress Mechanism

136. The project will adopt the grievance redress mechanism (GRM) outline of the first CRDP. The GRM shall be set up to register grievances of the people regarding technical, social and environmental aspects. Also, the GRM welcomes all kinds of technical and safeguards-related queries, comments, suggestions and complaints from anyone. The process will be designed to be transparent, gender responsive, culturally appropriate and commensurate to the risks and adverse impacts of the project, as well as readily accessible to all segments of the affected people. The project GRM will not supersede any legal government grievance procedures.

137. Affected people are to be informed about the mechanism through information caravan and orientation in the community to be conducted by the project officers and staff, printing of pamphlets and brochures, media and public outlets. To ensure wider coverage, complaints or grievances can be reported through but not limited to: letters, e-mails, text messages, verbal narration from walk-in complainants, phone calls, fax, online grievance registration form (in local dialects) through the project website, installation of Grievance Intake Box at the project area and other mode of filing that the affected people have access to. For those affected people who cannot read and write, a community leader/volunteer will be identified in

¹⁸Per ADB SPS, 2009, prior to disclosure on ADB website, ADB reviews the "borrower's/client's social and environmental assessment and plans to ensure that safeguard measures are in place to avoid, wherever possible, and minimize, mitigate, and compensate for adverse social and environmental impacts in compliance with ADB's safeguard policy principles and Safeguard Requirements 1-4."

every project area. The community leader/volunteer will serve as the focal person who will assist the affected people in filing the complaints. This participatory process shall ensure that all views of the people are adequately reviewed and suitably incorporated in the design and implementation process. The GRM will be implemented in three levels. See **Figure 22** for the outline.

138. **First Level.** The first level and most accessible and immediate venue for the fastest resolve of grievances is the PIU, chiefly through the Environment and/or Social Safeguard Officers and Project Manager (or equivalent), with assistance from the Environmental and Social Safeguard Specialists of the preparation, design and supervision consultant (PDSC). The contact phone number will be posted in the project areas and at PMU and PIU websites and notice boards. Grievances will be resolved through continuous interactions with affected persons and the PIU will answer queries and resolve grievances regarding various issues including EMP implementation, land acquisition, structures acquisition, livelihood impacts, entitlements, and assistance. Corrective measures will be undertaken at the field-level itself within five days and feedback provided to the complainant on actions taken for resolution. All grievances will be documented with full information of the person and issue. A sample grievance form that may be used is in **Appendix 10**. The suggested format for record-keeping of grievance is in **Appendix 11**.

139. **Second Level.** Should the grievance remain unresolved, the PIU Project Manager (or equivalent), will activate the second level of the GRM by referring the issue (with written documentation) to the local Grievance Redress Committee (GRC) of the Pourashava or City Corporation, who will, based on review of the grievances, address them in consultation with the Safeguards Officers of the PIU and PMCU, and affected persons. A hearing will be called, if necessary, where the affected person can present his/her concern/issues. The process will promote conflict resolution through mediation. The PIU Project Manager will be responsible for processing and placing all papers before the GRC, recording decisions, issuing minutes of the meetings, providing feedback to complainants and taking follow up actions so that formal orders are issued and decisions are carried out. The local GRC will consist of the following persons: (i) Chief Executive Officer or Secretary of the Pourashava or City Corporation (GRC Chair); (ii) representative of the mayor of the Pourashava or City Corporation; (iii) representative of the affected persons; (iv) official of the land registry department; (v) official of the DOE divisional office; (vi) town planner of the Pourashava or City Corporation; and (vii) environmental and/or social safeguards officers of the PIU. The local GRC shall meet weekly, unless the Head of the PIU informs that there are no grievances to address, or they shall meet as needed as per the severity of the grievance. The local GRC will suggest corrective measures at the field level and assign responsibilities for implementing its decisions.


140. The functions of the local GRC are as follows: (i) provide support to affected persons on problems arising from land acquisition (temporary or permanent), asset acquisition and eligibility for entitlements, compensation and assistance, and other environmental or social safeguard issues unresolved at the first level of GRM; (ii) record grievances of affected persons, categorize and prioritize them and provide solutions within 10 days from receipt of grievance from the first level; and (iii) report to the aggrieved parties about developments regarding their grievances and decisions of the GRC.

141. **Third Level.** Should the grievance remain unresolved, the PIU Head will activate the third level of the GRM by informing the PMCU Project Director who will, based on review of the local GRC minutes and consultation with the local GRC Chair, activate the PMCU level GRC. This committee shall comprise the following representatives: (i) Project Director, PMCU; (ii) Deputy Project Director, PMCU; (iii) Environmental/Resettlement Safeguards Officer of the PMCU; (iv)

representative from Land Ministry; (v) representative from DOE; (vi) representative of the affected persons; and (vii) Environmental and/or Social Safeguards officers of the PIU. The Project Director will sign off on all grievances received by the PMCU.

142. The GRC at the PMCU level shall meet based on the receipt of grievances, and the meeting shall be convened, and grievance redressed within 15 days of receipt of the grievance by the PMCU. The Environmental and/or Social Safeguards Officer of the PMCU will be responsible for processing and placing all papers before the PMCU GRC, recording decisions, issuing minutes of the meetings and taking follow up action to see that formal orders are issued and the decisions carried out, and final decision conveyed to the complainant.

Figure 22: Project Grievance Redress Mechanism¹⁹

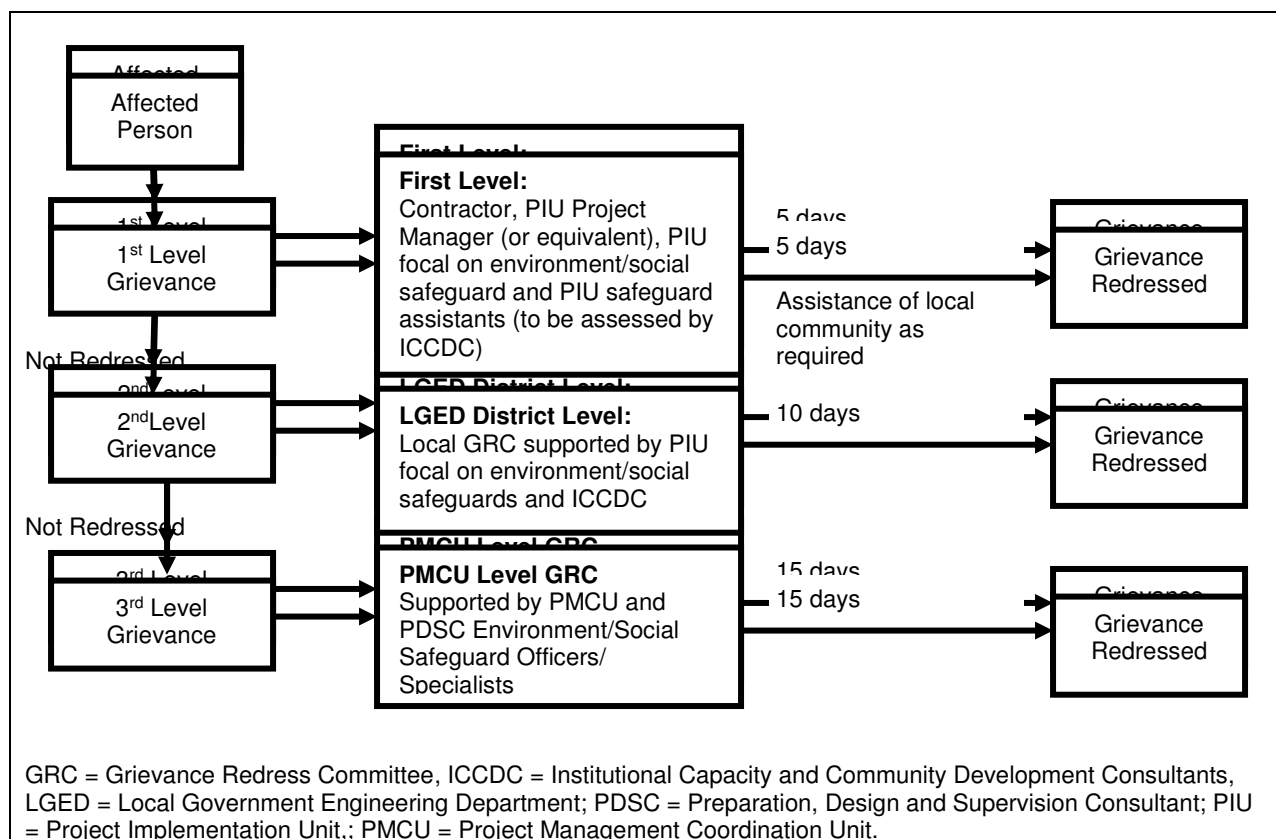

^a Outline adopted from GRM of CRDP, and revised to conform with new arrangements and nomenclatures of the project.

143. The GRM notwithstanding, an aggrieved person shall have access to the country's legal system at any stage. This can run parallel to accessing the GRM and is not dependent on the negative outcome of the GRM.

144. If the established GRM is not in a position to resolve the issue, the affected persons can also use the ADB Accountability Mechanism through directly contacting (in writing) the Complaint Receiving Officer at ADB headquarters. The complaint can be submitted in any of the official

¹⁹Outline adopted from GRM of CRDP, and revised to conform with new arrangements and nomenclatures of Second CRDP.

languages of ADB's Developing Member Countries. The ADB Accountability Mechanism information will be included in the Project Information Document to be distributed to the affected communities, as part of the project GRM.

VII. ENVIRONMENTAL MANAGEMENT PLAN

A. Institutional Arrangements

145. **Project Management Coordination Unit.** LGED will be the executing agency responsible for overall guidance of the project and implementation of urban roads and solid waste management subprojects. The PMCU, headed by a Project Director will be responsible²⁰ for planning, management, coordination, supervision and progress monitoring of the project in the two city regions. The PMCU has the responsibility of fulfilling environmental requirements of the government and conducting required level of environmental assessment as per ADB SPS, 2009. To ensure effective implementation of the environmental aspects, one full-time environmental safeguards officer who is a permanent employee of LGED will be assigned at PMCU. The environmental safeguards officer will primarily be responsible for the compliance to the statutory and legal requirements, including overall supervision of the implementation of the environmental management provisions in the IEEs/EMPs for the subprojects. The PDSC will assist the PMCU in this regard.

146. **Project Implementation Unit.** The Gazipur PIU will be responsible for the day-to-day activities of project implementation in the field and will have direct supervision to all contractors at subproject sites. Gazipur PIU will appoint at least one environment staff responsible for day-to-day monitoring of the project progress and implementation of the environmental provisions in the EMP. and the environment staff will ensure compliance with government and ADB requirements on environmental safeguards. The Gazipur PIU will prepare quarterly progress reports on all aspects concerning environmental assessment, management, monitoring, and report to the PMCU.

147. **Preparation, Design and Supervision Consultants.** The Preparation, Design and Supervision Consultants (PDSC) team shall include the following environmental safeguards expertise to effectively implement the EARF and relevant provisions of the IEE reports of the subprojects: (i) an international environmental safeguards specialist (to be hired only on “as needed” basis); and (ii) national environmental specialists (for duration of implementation). These personnel will provide technical support to the PMCU and Gazipur PIU including implementation of the environmental requirements, according to ADB SPS, and assist in monitoring impacts and mitigation measures associated with subprojects. The PDSC safeguards specialists will support environmental management functions including updating subproject IEEs with respect to environmental management plans, assisting in preparing IEEs, and assist in monitoring impacts and mitigation measures associated with subprojects. The consultants will also provide needed training and capacity building support to the PMCU and Gazipur PIU. The Terms of Reference for project environmental personnel is provided in **Appendix 12**.

148. **Contractors.** The contractors will have specific roles in the implementation of the EMPs. Each contractor shall have at least one full time environmental health and safety supervisor (or equivalent) responsible for implementing applicable measures in the EMP. All these specific roles and responsibilities are discussed in this IEE report which shall form part of the contract documents. Gazipur PIU will monitor contractors’ environmental performance.

149. **Table 18** summarizes the overall roles and responsibilities of PMCU, Gazipur PIU, and ADB.

²⁰PMCU responsibilities shall include management of (i) Local Government Grant facility, (ii) Investment components under the project, and (iii) Institutional Strengthening and Capacity building of the local governments. The project PMCU will be advised by a Technical Advisory and Selection Committee and an Urban Management Support unit.

Table 18: Institutional Roles and Responsibilities

Project Management Coordination Unit	Project Implementation Unit	ADB
Pre-construction stage		
Environmental Officer of the PMCU, with assistance from the Environmental Specialist(s) of the PDSC to conduct Rapid Environmental Assessment (REA) for each subproject using checklists available on ADB's website. Based on the REA, categorize the project based on ADB's SPS. Submit all categorization forms to ADB.	PDSC will assist the PIU and conduct IEE (or update existing IEE) for all Category B subprojects, which will include an EMP. PIU with assistance from the Environmental Officer of the PMCU and the Environmental Specialist of the PDSC to carry out public consultation during IEE process and incorporate consultation findings into project designs and IEE.	ADB to review the REA checklists and reconfirm the categorization.
PMCU based on review, will approve the IEE and send to ADB for review and clearance before contract award. The IEE also made available on request. Ensure IEE with the corresponding EMP is part of contract documents for category B subprojects and/or components. If the subproject and/or component is of category 'C', the PMCU to provide generic mitigation measures, if any, to be implemented. For Category C subprojects, no IEE/EIA is required, only a review of the environmental implications.	After the approval of IEE by PMCU and clearance by ADB, PIU with the assistance of PDSC to disclose the IEE and EMP to public information as required by ADB's SPS. PDSC, on behalf of the PIU, to incorporate mitigation measures in project design, specified in IEE and incorporate environmental mitigation and monitoring measures that need to be incorporated into contract document.	ADB will review and grant clearance of IEE/EMPs for subprojects before award of contracts. ADB will disclose cleared and government-endorsed IEEs on its website.
Environmental Officer of PMCU to provide guidance to the PIU to ensure conformance of all subprojects to the regulatory compliance, with regard to environment. This shall include guidance in preparation of the documents as required for the issuance of ECC under the ECR and other necessary clearances such as for example tree cutting permits from the Ministry of Environment and Forests, submission of application forms, and liaising with agencies towards obtaining ECC, tree-cutting permits, and other clearances from relevant government agencies. Environmental Officer of PMCU shall notify the ADB on obtaining of these clearances, including the conditions specified if any in the clearances, and integration of these into the contracts/EMP.	ECR stipulates that for (i) green, (ii) orange-A, (iii) orange-B, and (iv) red category projects, obtaining of environmental clearance certificate from DOE is a prerequisite. The Environmental Support staff of the PIU with assistance from PDSC Environmental Specialists shall compile the necessary information required for submission of application forms for clearances, obtaining NOC from local authorities, etc. Until the obtaining of clearance certificate from DOE, the Environmental Support Staff will interact with the DOE on a regular basis and provide necessary documentation/clarifications as required.	ADB to ensure that the clearance requirements are included in the contract provisions/EMP.
Environmental Officer of PMCU to ensure that the IEE containing the EMP of each subproject is included in the bid and contract documents. At the same time, the Environmental Officer of PMCU to ensure that the total budget for	The environmental support staff of PIU to ensure that: (i) each contractor prepares its SEMP based on the EMP in the subproject IEE, and (ii) budget is included in the SEMP.	

Project Management Coordination Unit	Project Implementation Unit	ADB
implementing the EMP is included in the bid and contract documents.		
Construction stage		
PMCU to review the PIU monthly monitoring reports to ensure that all mitigation measures are implemented. PMCU to consolidate the monthly reports and submit semi-annual reports to ADB for review. Corrective actions to be undertaken if needed.	Contractors to conduct environmental monitoring and implement EMPs. PIU with support of the Environmental Specialist(s) of PDSC to (i) review and approve the contractors' implementation plan for the environmental provisions in the EMP, and (ii) monitor the implementation of mitigation measures by contractor. The PDSC with PIU to prepare monthly progress reports including a section on implementation of the mitigation measures and submit to PMCU for review. PMCU to submit semi-annual monitoring report to ADB.	ADB to review the reports and provide necessary advice/guidance needed to the PMCU.
Operation Stage		
LGED and Gazipur PIU to conduct monitoring, as specified in the environmental monitoring plan of EMP. The DOE to monitor the performance, if required and as specified in monitoring plan of EMP.		ADB to review semi-annual environmental monitoring report and disclose on its website. ADB to prepare Project Completion Report
PMCU to continue submission of semi-annual environmental monitoring report to ADB until ADB issues a Project Completion Report.		

ADB = Asian Development Bank, DOE = Department of Environment, ECC = Environmental Compliance Certificate, ECR = Environmental Conservation Rules, EIA = Environmental Impact Assessment, EMP = Environmental Management Plan, IEE = initial environmental examination, PDSC = preparation, Design, and Supervision Consultant, NOC = no objection certificate, PIU = Project Implementation Unit, PMCU = Project Management Coordination Unit, REA = Rapid Environmental Assessment, SPS = Safeguards Policy Statement.

B. Environmental Management Plan

150. An environmental management plan (EMP) has been developed to provide mitigation measures to reduce all negative impacts to acceptable levels (**Table 19**).

151. The EMP will guide the environmentally-sound construction of the subproject and ensure efficient lines of communication between PMCU, Gazipur PIU, consultants and contractors. The EMP will (i) ensure that the activities are undertaken in a responsible non-detrimental manner; (ii) provide a pro-active, feasible and practical working tool to enable the measurement and monitoring of environmental performance on site; (iii) guide and control the implementation of findings and recommendations of the environmental assessment conducted for the subproject; (iv) detail specific actions deemed necessary to assist in mitigating the environmental impact of the subproject; and (v) ensure that safety recommendations are complied with. The EMP includes a monitoring program to measure the environmental condition and effectiveness of implementation of the mitigation measures. It will include observations on- and off-site, document checks, and interviews with workers and beneficiaries.

152. The contractor will be required to (i) carry out all of the mitigation and monitoring measures set forth in the approved EMP; and (ii) implement any corrective or preventive actions set out in safeguards monitoring reports that PMCU will prepare from time to time to monitor implementation of this IEE, EMP and site-specific EMP (SEMP). The contractor shall allocate budget for compliance with these IEE, EMP and SEMP measures, requirements and actions. The contractor will be required to submit to PIU, for review and approval, SEMP including (i) proposed sites/locations for construction work camps, storage areas, hauling roads, lay down areas, disposal areas for solid wastes and excavation spoils; (ii) specific mitigation measures following the approved EMP; and (iii) monitoring program per EMP. No works can commence prior to approval of SEMP.

Table 19: Environmental Management Plan Matrix

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
1. Before Construction Activities					
Consents, permits, clearances, etc.	Failure to obtain necessary consents, permits, and other appropriate regulatory clearances can result to design revisions and work stoppage	<ul style="list-style-type: none"> - Obtain all of the necessary consents, permits, and clearances before the start of civil works. - Include in detailed design drawings and documents all conditions and provisions if necessary 	PMCU, Gazipur PIU, PDSC	Incorporated in final design and communicated to contractors	Before award of contract
Existing utilities	Disruption of services	<ul style="list-style-type: none"> - Identify and include locations and operators of these utilities in the detailed design documents to prevent unnecessary disruption of services during construction - Require construction contractors to prepare a contingency and spoil management plan 	PMCU, Gazipur PIU, PDSC	List of affected utilities and operators; Bid document to include a requirement for a contingency plan for service interruptions, e.g. provision of water if disruption is more than 24 hours, spoil management plan	During detailed design phase Review of spoils management plan: Twice (once after first draft and once before final approval)
Construction work camps, stockpile areas, storage areas, and disposal areas	Disruption to traffic flow and sensitive receptors	<ul style="list-style-type: none"> - Determine locations before award of construction contracts 	PMCU, Gazipur PIU, PDSC	<p>List of selected sites for construction work camps, hot mix plants, stockpile areas, storage areas, and disposal areas.</p> <p>Written consent of landowner/s (not lessee/s) for reuse of</p>	During detailed design phase

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
				excess spoils to agricultural land	
Waste generation	Generation of solid waste, wastewater from labor camp and other construction waste may cause pollution	<ul style="list-style-type: none"> - Follow the principle of “Reduce, Reuse, Recycle, and Recover” - Prohibition of unwanted littering and discharge of waste. - Solid waste is either managed in a pit or disposed in municipal collection system. 	Contractor	Contractor records. Visual inspection	Visual inspection by and PDSC on monthly basis
Sources of materials	Extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion, disturbance in natural drainage patterns, resulting water logging, and water pollution	<ul style="list-style-type: none"> - Prepare list of approved quarry sites and sources of materials 	PMCU, Gazipur PIU, PDSC	List of approved quarry sites and sources of materials; (ii) Bid document to include requirement for verification of quarry sites	During detailed design phase, as necessary with a discussion with detailed design engineers and Gazipur PIU suitability of sources and permit for additional quarry sites if necessary.
Environmental management plan (EMP) Implementation Training	Without training, the EMP may not be implemented efficiently. Hence, will have impact to the environment, workers, and community	<ul style="list-style-type: none"> - Project manager and contractors should be trained on EMP implementation, spoils management, standard operating procedures (SOP), health and safety (H&S), applicable regulatory compliance. 	PMCU, Gazipur PIU, PDSC, Contractor's Environmental Supervisor	Record of completion (Safeguards Compliance Orientation) Contractor records for EMP implementation at worksites	During the detailed design phase before the mobilization of workers to site
2. During Construction Activities					
A. Physical Characteristics					
Topography landforms, geology, and	Sand, gravel or crushed stone will	<ul style="list-style-type: none"> - Utilize readily available sources with environmental clearance and license 	Contractor	Records of sources of materials	Monthly by Gazipur PIU

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
soils and river morphology and hydrology	be required for this town project. Extraction of natural aggregate materials may cause localized changes in topography and landforms (if on land) or river morphology and hydrology (if on the river).	<ul style="list-style-type: none"> - Borrow areas and quarries comply with environmental requirements. - Coordinate with local authorities such as the Bangladesh Water Resources Development Board for quarrying from rivers. Alternative sources should be identified. 			
Water quality	Trenching and excavation, run-off from stockpiled materials and chemical contamination from fuels and lubricants may result to silt-laden runoff during rainfall, which may cause siltation and reduction in the quality of adjacent bodies of water.	<ul style="list-style-type: none"> - Follow WB EHS Guidelines on Construction and Decommissioning Activities; - Dispose excess spoils and materials - Disposal site in designated areas. - Earthworks during dry season - Stockyards at least 300m away from watercourses. - Fuel and other petroleum products stored at storage areas away from water drainage and protected by impermeable lining and bunded areas with 110% volume for storage of petroleum products used during construction, such as fuel, oils, and lubricants; - Provide orientation and training to assigned workers on the correct handling of petroleum-based products, clean-up of equipment, and response measures in case spills or 	Contractor	<p>Areas for stockpile storage of fuels and lubricants and waste materials;</p> <p>Number of silt traps installed along trenches leading to water bodies;</p> <p>No visible degradation to nearby drainage, water bodies due to construction activities</p>	<p>Visual inspection by Gazipur PIU and/or PDSC on weekly basis</p> <p>Frequency and sampling sites to be finalized during detailed design.</p>

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
		<p>emergencies using a well prepared emergency response plan;</p> <ul style="list-style-type: none"> - Ensure no refueling within 100 m from surface water. - Take precautions to minimize the overuse of water; - Prevent wastewater into water sources; - Ensure safe water diversion; and - No obstruction in flowing water. 			
Air quality	Work at the dry season and transporting construction materials may increase dust, carbon, monoxide, sulfur oxides, particulate matter, nitrous oxides, and hydrocarbons in air environment	<ul style="list-style-type: none"> - Follow World Bank's Environmental Health and Safety (EHS) Guidelines on Construction and Decommissioning Activities; - Confine earthworks according to excavation segmentation plan that should be part of site-specific environmental management plan (SEMP); - Prepare and implement a dust management plan that should be part of the SEMP; - Consult with PIU on the designated areas for stockpiling of sand, gravel, and other construction materials (ideally about 500 m from residential areas); - Bring construction materials (aggregates, sand, etc.) to the construction site as and when required to avoid heavy stockpiling at the sites; - Damp down with water dry exposed surfaces and stockpiles of aggregates at least twice daily, or as necessary; - If re-surfacing of disturbed roads cannot be done immediately, spread 	Construction Contractor	<p>Location of stockpiles;</p> <p>Number of complaints from sensitive receptors;</p> <p>Heavy equipment and machinery with air pollution control devices;</p> <p>A certification that vehicles are compliant with Bangladesh vehicle emission standards.</p> <p>Ambient air quality tests.</p>	<p>Visual inspection by Gazipur PIU and/or PDSC on monthly basis</p> <p>Ambient air quality testing will be conducted consistent with the monitoring plan, or increase frequency as may be needed.</p>

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
		<ul style="list-style-type: none"> crushed gravel over backfilled surfaces; - During demolition, water exterior surfaces, unpaved ground in the immediate vicinity and demolition debris; - Place signage at active work sites in populated areas; - Require trucks delivering aggregates and cement to have tarpaulin cover; - Clean wheels and undercarriage of vehicles prior to leaving construction sites; - Limit speed of construction vehicles on access roads and work sites to a maximum of 30 km/h; - Prohibit burning firewood in work and labor camps (promote liquified petroleum gas for cooking purposes and electric heater for heating purposes); - Use vehicles that have government-issued permits and registrations, complying with Bangladesh vehicle emission standards; and - Prohibit open burning of solid waste. - 			
Acoustic environment	Temporary increase in noise level and vibrations by excavation equipment, and the transportation of materials,	<ul style="list-style-type: none"> - Follow WB EHS Guidelines on Construction and Decommissioning Activities. - If applicable to subproject alignment, prepare and implement a noise and vibration management plan that should be part of the SEMP; - Provide prior information to the local public, including institutions such as 	Contractor	Number of complaints from sensitive receptors; Use of silencers in noise-producing equipment Use of sound barriers or enclosures for generators, if any;	Visual inspection by Gazipur PIU and/or PDSC on monthly basis

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
	equipment and people.	<p>schools and hospitals, about the work schedule;</p> <ul style="list-style-type: none"> - Use equipment that emits the least noise, well-maintained and with efficient mufflers. Install silencers if necessary and practical; - Restrict noisy activities to day time; - Avoid use of noisy equipment or doing noisy works at night time; - Limit engine idling to a maximum of one minute; - Spread out the schedule of material, spoil and waste transport; - Minimize drop heights when loading and unloading coarse aggregates; - Not use horns unless it is necessary to warn other road users or animals of a vehicle's approach; - Warning signs in noise hazard areas. Require workers to wear ear plugs while in these areas; and - Identify vibration risk to nearby structures. Take caution working in such areas. 		Noise level measured at day time and night time	
Aesthetics	Interference with the enjoyment of the area and creation of unsightly or offensive conditions	<ul style="list-style-type: none"> - Prepare a debris disposal plan. - Minimize stockpile size - Clear wastes regularly - Avoid stockpiling of excess spoils. - Cover delivery trucks during transportation. - Clean roads. - Use screening enclosure shade cloth, temporary walls - Clean site regularly. 	Contractor	<p>Number of complaints from sensitive receptors;</p> <p>Worksite clear of all types of wastes</p> <p>Worksite clear of any wastes unutilized materials, and debris</p>	Visual inspection by Gazipur PIU and/or PDSC on monthly basis

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
		<ul style="list-style-type: none"> - Follow the principle of “Reduce, Reuse, Recycle, and Recover” 		Transport route and worksite cleared of dirt	
B. Biological Characteristics					
Biodiversity	<p>Potential cutting of trees along road alignments</p> <p>Threat to animals due to poaching or leisure catching by workers in the subproject areas</p>	<ul style="list-style-type: none"> - Tree cutting will be avoided, or minimized if total avoidance is not possible, for this subproject. - In case of unavoidable tree cutting, replacement of ten trees per tree cut and follow the Local Government Engineering Division (LGED) tree plantation program to implement this measure (see Appendix 7 for the LGED Manual). Further, any tree cutting activities shall be undertaken only outside the bird breeding season. - Any encounter with nomadic animal species will ensure these creatures are not hurt or killed. Any unintentional catch of any species should be reported and surrendered to authorized authorities for proper handling. 	Contractor	<p>Number of trees cut and planted if any (during detailed design stage)</p> <p>Some complaints from sensitive receptors on disturbance of vegetation, poaching fishing, etc.</p>	Visual inspection by Gazipur PIU and/or PDSC on monthly basis
C. Socioeconomic Characteristics					
<p>Existing economic activities or businesses</p> <p>Existing provisions for pedestrians and other forms of transport</p>	<p>Potential road closures due to construction activities.</p> <p>Hauling of construction materials and operation of equipment on-site can cause traffic problems.</p>	<ul style="list-style-type: none"> - Implement the Traffic Management Plan - Prepare suitable alternate transportation routes - Safe passage for vehicles and pedestrians - Avoid full road closures where possible by implementing section-wise or chainage wise approach during excavation, concreting and/or curing periods 	Contractor	Traffic route during construction works, including number of permanent signs, barricades, and flagmen on worksite; Number of complaints from sensitive receptors;	Visual inspection by Gazipur PIU and/or PDSC on monthly basis

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
		<ul style="list-style-type: none"> - Where full road closure is necessary especially in very narrow roads, inform affected residents or establishment prior to any construction activity and provide them with alternate routes. Ensure to complete construction activities in the fastest way possible. Provide appropriate compensation to qualified affected persons or businesses - Schedule material deliveries on low traffic hours. - Erect and maintain barricades if required - Inform through display board about nature, duration of construction and contact for complaints - Complete the work quickly in nearby institution, place of worship, business, hospitals, and schools. - Consult with business and institutions for work schedules. - Restore damaged properties and utilities 		Some signage placed at the subproject location. Number of walkways, signage, and metal sheets placed at subproject location	
Socioeconomic status	Staffing will be required during construction. This can result in an increase in local revenue.	<ul style="list-style-type: none"> - Engage the local workforce. However, child and forced labor shall be strictly prohibited. - Secure construction materials from local market. 	Contractor	Employment records; Records of sources of materials Records of compliance with Bangladesh Labor Act 2006.	Visual inspection by Gazipur PIU and/or PDSC on monthly basis
Other amenities for	Civil works may result in an impact to the sensitive	<ul style="list-style-type: none"> - Identify location and nature of existing infrastructure before excavation 	Contractor	Number of complaints from sensitive receptors	Visual inspection by Gazipur PIU and/or

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
community welfare	receptors such as residents, businesses, and the communities. Excavation may also damage infrastructure located alongside the roads.	<ul style="list-style-type: none"> - Minimize repeated disturbance to locals by integrating other forms of infrastructures. - Inform local about nature, duration and possible impacts of the construction and integrate their concerns - Promptly relocate infrastructure materials - Take prior permission from local authority for water use - Restore damaged properties and utilities to pre-work conditions. - 			PDSC on monthly basis
Community health and safety	Construction works will impede the access of residents and business in limited cases. Construction works will raise danger to community people.	<ul style="list-style-type: none"> - Restrict work force in designated areas. - Identify stockyard areas in consultation with local administration - Work on private land requires written permission of landowners. - Prefer small mechanical excavator for trenching - Prohibit alcohol and drugs on site - Prevent excessive noise; - Code of conduct for workers includes restricting workers in designated areas, no open defecation, no littering, no firewood collection, no fire except designated places, no trespassing, no residence at construction sites, and no obligation to potentially dangerous work - Follow international best practices on community health and safety such as those in Section 4.3 of World Bank 	Contractor	The number of permanent signs, barricades, and flagmen on worksites per Traffic Management Plan (see Appendix 13 for sample which can be modified according to applicability); Number of complaints from sensitive receptors; Number of walkways, signs, and metal sheets placed at the subproject location Agreement between landowner and contractors in case of	Visual inspection by Gazipur PIU and/or PDSC on weekly basis

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
		<p>Environmental Health and Safety (EHS) Guidelines on Construction and Decommissioning Activities</p> <ul style="list-style-type: none"> - Maintain a complaint logbook in workers camp and take action promptly of complaints 		using private land as work camps storage areas etc.	
Workers Health and Safety	There is invariably a safety risk when construction works such as excavation and earthmoving are conducted in urban areas. Workers need to be mindful of the occupational hazards, which can arise from working at height and excavation works.	<ul style="list-style-type: none"> - Comply with Bangladesh Labor Act 2006. - Follow international best practices on occupational health and safety such as those in Section 4.2 of World Bank EHS Guidelines on Construction and Decommissioning Activities. - Train all site personnel on environmental health and safety - Exclude public from worksites - Provide personal protective equipment to workers and ensure their effective usage - Document procedures to be followed for site activities. - Maintain accident reports and records. - Make first aid kits readily available. - Maintain hygienic accommodation in work camps. - Ensure uncontaminated water for drinking, cooking and washing. - Ensure clean eating areas. - Ensure sanitation facilities are readily available. - Provide medical insurance coverage for workers. - Provide orientation for guest visitors. 	Contractor	<p>Site-specific health and safety plan</p> <p>Equipped first-aid stations</p> <p>Medical insurance coverage for workers</p> <p>Number of accidents</p> <p>Records of supply of uncontaminated water</p> <p>Condition of eating areas of workers</p> <p>Record of orientation training</p> <p>Availability of personal protective equipment at construction site</p> <p>Percentage of moving equipment outfitted with audible back-up alarms</p> <p>Signage for storage and disposal areas</p> <p>Condition of sanitation facilities for workers</p>	Visual inspection by Gazipur PIU and/or PDSC on a weekly basis.

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
		<ul style="list-style-type: none"> - Ensure that visitors do not enter hazard areas unescorted. - Require workers to wear high visibility clothes. - Ensure moving equipment is outfitted with audible backup alarms. - Chemical and material storage areas need to be marked clearly. - Hearing protection equipment enforced in noisy environment. 			
D. Historical, Cultural, and Archaeological Characteristics					
Physical and cultural heritage	There are no archaeological, paleontological, or architectural sites of significance listed by Bangladesh Department of Archaeology and United Nations Educational, Scientific and Cultural Organization (UNESCO).	<ul style="list-style-type: none"> - Stop work immediately to allow further investigation if any findings are suspected. 	Contractor	Records of chance finds	Visual inspection by Gazipur PIU and/or PDSC Monthly basis.
E. Others					
Submission of EMP implementation Report	Unsatisfactory compliance to EMP	<ul style="list-style-type: none"> - Appointment of full time EHS supervisor (or equivalent) - Timely monitoring reports with field photographs 	Contractor	Availability and competency of appointed supervisor Daily monitoring sheets by Contractor EHS supervisor	Monthly monitoring report to be submitted by contractors to Gazipur PIU and Gazipur PIU submit quarterly reports to PMCU.

Field	Impacts	Mitigations Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring
				Monthly monitoring reports by Contractor to Gazipur PIU.	PMCU to submit semi-annual monitoring report to ADB
3. During Post Construction Activities and Operation and Maintenance					
Post construction site clearing activities	Damage due to debris, spoils, excess construction materials	<ul style="list-style-type: none"> - Remove spoils wreckage, rubbish, or temporary structures no longer required; - All disrupted utilities should be restored - All affected structures rehabilitated /compensated - The construction camp needs to clear of spills e.g. oil, paint, etc. and other pollutants after dismantling - All hardened surfaces shall be ripped; all imported materials shall be removed, and all temporary services shall be cancelled - Fully reinstate pathways, other local infrastructure, and agricultural land to at least their pre-project condition as recorded by the Contractor - Request PMCU or PIUs in writing that worksites and camps are already vacated and restored to at least pre-project conditions 	Contractor	PMCU and/or Gazipur PIU report in writing that (i) worksite is restored or reinstated to at least original conditions; (ii) camp has been vacated and restored to pre-project conditions; (iii) all construction related structures not relevant to operation and maintenance are removed, and (iv) worksite clean-up is satisfactory.	Before turnover of completed works to Gazipur PIU

C. Environmental Monitoring Program

153. Monitoring of mitigation measures during construction is the responsibility of the PIU supported by the PMCU Environment Officer and PDSC Environmental Specialist. **Table 20** shows the proposed Environmental Monitoring Plan for this subproject, which specifies the various monitoring activities, indicating location, frequency of monitoring and responsibility.

Table 20: Environmental Monitoring Program

Activities or Items to Monitor	Location	Responsible for Activities	Monitoring Method	Monitoring Frequency	Monitoring Responsibility
PRE-CONSTRUCTION					
Secure Environmental Compliance Certificate from Department of Environment	PMCU office	PMCU, PDSC	Copy of approved ECC	Before construction activities	PMCU, PDSC
IEEs and EMPs are included in bid and contract documents	PMCU office	PMCU, PDSC	Copies of bid and contract documents	Before approval tender document	PMCU, PDSC
Site-specific EMP (SEMP) submitted by Contractor for approval by PIU	PIU office	Contractor, PIU	Copy of approved SEMP	Before construction activities commence	PMCU, PDSC
Spoil Management Plan (SMP) submitted by Contractor for approval by PIU	PIU office	Contractor, PIU	Copy of approved SMP	Before construction activities commence	PMCU, PDSC
Traffic Management Plan (TMP) submitted by Contractor for approval by PIU	PIU office	Contractor	Copy of approved TMP	Before construction activities commence	PMCU, PDSC
Baseline environmental data gathering	All subproject sites	Contractor	Ambient air quality sampling Noise level measurements	Once before construction activities commence	PMCU, PDSC
Secure all other necessary permits and licenses from relevant government agencies		Contractor	Copies of permits and licenses	Before construction activities commence	PMCU, PIU, PDSC
CONSTRUCTION					
Implementation of SEMP; including implementation of community and occupational health and safety measures.	Subproject sites	Contractor	Site visits, Contractor records,	Weekly or as needed	PIU, PDSC
Implementation of SMP	Subproject sites	Contractor	Site visits, Contractor records	Weekly or as needed	PIU, PDSC
Implementation of TMP	Subproject sites	Contractor	Site visits, Contractor records	Weekly or as needed	PIU, PDSC
Conduct of ambient air quality sampling and noise level measurements	Subproject sites	Contractor	Contractor records, Results of laboratory analyses	At least semi-annual or as needed	PMCU, PIU, PDSC
Develop and apply archaeological protocol to protect chance finds	All subproject sites	Contractor, PMCU, Gazipur PIU, PDSC	Contractor records	Once until protocol is approved	PMCU, PIU, PDSC

Activities or Items to Monitor	Location	Responsible for Activities	Monitoring Method	Monitoring Frequency	Monitoring Responsibility
Provide EHS training for all personnel	All subproject sites	Contractor	Contractor records; Interviews to workers	Monthly	PIU, PDSC
Keep accident reports and records	All subproject sites	Contractor	Contractor records; Interviews to workers and community people	Monthly	PIU, PDSC
Employ workforce from communities near sites	All subproject sites	Contractor	Contractor records	Monthly	PIU, PDSC
Implementation of EHS measures at construction camps	Construction camp sites	Contractor	Site visits; Interviews to workers at camps	Monthly	PIU, PDSC
OPERATION AND MAINTENANCE					
Maintain safe passage for vehicles and pedestrians during maintenance activities	Subproject road sites	PIU	Site observations	Monthly	LGED
Maintain all road signages at critical points particularly the accident-prone areas and areas near institutional establishments such as schools, places of worship, hospitals.	Subproject road sites	PIU	Site observations	Monthly	LGED
Provide signboards informing nature and duration of maintenance activities	Subproject road sites	PIU	Site observations	Monthly	LGED
Prevent run-off/deposit of foreign materials (oil, grease, solid waste, plastics) into watercourses, and clean drain periodically; dispose of materials removed from drains	Subproject road sites	PIU	Site observations	Monthly	LGED
Dispose of material from blocked drain in location away from roadway and drain	Subproject road sites	PIU	Site observations	Monthly	LGED

EHS = environmental, health and safety, IEE = initial environmental examination, LGED = Local Government Engineering Division, PDSC = preparation, design and supervision consultant, PIU = project implementation unit, PMCU = project management coordination unit, SMP = spoil management plan, TMC = traffic management plan.

D. Capacity Development Training

154. The PMCU safeguards experts (environmental and social) with support from PDSC Environment Specialist and Social Safeguard Specialist will be responsible for training the Gazipur PIU' safeguards officers (environmental and social). Training modules will need to cover safeguards awareness and management in accordance with both ADB and government requirements as specified below:

- (i) Environmental Safeguards
 - (a) sensitization on ADB's safeguard policy on environment;
 - (b) introduction to environment and environmental considerations in roads, drainage and solid waste management projects;
 - (c) review of IEEs and integration into the project detailed design;
 - (d) community and occupational health and safety considerations;
 - (e) consultation and participation requirements;
 - (f) project GRM and ADB's Accountability Mechanism;
 - (g) improved coordination within nodal departments; and
 - (h) monitoring and reporting system. The contractors will be required to conduct environmental awareness and orientation of workers prior to deployment to work sites.
- (ii) Social Safeguards
 - (a) sensitization on ADB's policies on Involuntary Resettlement and Indigenous People;
 - (b) introduction to social safeguards assessment and document requirements;
 - (c) Consultation and participations requirements;
 - (d) Project GRM and ADB's Accountability Mechanism; and
 - (e) monitoring and reporting system.

155. The proposed training project along with the frequency of sessions is presented in **Table 21**.

Table 21: Training Program for Environmental Management

Items	Pre-construction	Construction	
Training Title	Orientation workshop	Orientation program/ workshop for contractors and supervisory staff	Experiences and best practices sharing
Purpose	To make the participants aware of the environmental safeguard requirements of ADB and Government of Bangladesh and how the project will meet these requirements	To build the capacity of the staff for effective implementation of the designed EMPs aimed at meeting the environmental safeguard compliance of ADB and Government of Bangladesh	To share the experiences and best practices aimed at learning lessons and improving implementation of EMP
Contents	Module 1: Orientation ADB Safeguards Policy Statement Government of Bangladesh Environmental Laws and Regulations	Roles and responsibilities of officials/contractors/consultants towards protection of the environment Environmental issues during construction Implementation of EMP	Experiences on EMP implementation – issues and challenges Best practices followed

Items	Pre-construction	Construction	
	Module 2: Environmental Assessment Process ADB environmental process, identification of impacts and mitigation measures, formulation of an environmental management plan (EMP), implementation, and monitoring requirements Review of environmental assessment report to comply with ADB requirements Incorporation of EMP into the project design and contracts	Monitoring of EMP implementation Reporting requirements	
Duration	1 day	1 day	1 day on a regular period to be determined by PMCU and PDSC
Participants	PMCU and PIU staff (technical and environmental) involved in the project implementation	PMCU, PIU, Contractors	PMCU, PIU, Contractors

E. Environmental Management and Monitoring Plan Implementation Cost (Indicative)

156. Most of the costs associated with environmental mitigation and enhancement measures are included in the EMP budget. In consideration to the environmental impacts and their mitigation measures for this subproject, some items need to be incorporated in the Bill of Quantities (BOQ) of this subproject. A substantial part of environmental costs shall cover under Civil Works Contract. However, environmental costs under Civil Works Contract are not included here. Costs of these items will be dealt elsewhere in the respective project component document. The environmental costs presented in **Table 22** are tentative provisions based on experience of undertaking similar works under different LGED projects. For the details of environmental costs under civil works contract, individual contract package bid document may be consulted. It is assumed that the environmental cost under civil works contract for each contract package will be more or less same.

Table 22: Tentative EMP Budget for BOQ

(The following items need to be incorporated in the BOQ of this subproject):

Item #	Description of Items	Unit	Quantity	Unit Rate (Tk)	Item Total (Tk)
1	Environmental Monitoring a) Air Quality, b) Noise level, c) Water quality, d) Sediment at work site to the entire satisfaction of the engineer-in-charge.	Lump sum		20000	20,000.00
2	Dust suppression measures (excluding watering for compaction) to the entire satisfaction of the engineer-in-charge.	m	9970	2.00	19,940.00
3	Prevention of spillage, leakages of polluting materials to the entire satisfaction of the engineer-in-charge.	Lump sum		5000	5,000.00
4	Providing and maintaining adequate potable water supply facilities (Shallow Tube well) at camp site and work site to the entire satisfaction of engineer-in-charge. Two Water Supply Tube wells	Nos.	1	10000	10,000.00
5	Providing and maintaining adequate sanitation facilities at camp site and work site to the entire satisfaction of engineer-in-charge. Two Sanitation Toilets (one for women and one for men)	Nos.	2	5000	10,000.00
6	Rehabilitation of ancillary sites including stockpile sites, brick crushing sites, borrow areas, workforce camp, to the entire satisfaction of the engineer-in-charge.	m	5000	2	10,000.00
7	Proper disposal of camp site wastes to the entire satisfaction of the engineer-in-charge.	Lump sum		10000	10,000.00
8	Maintain First aid box at camp site to the entire satisfaction of the engineer-in-charge.	Lump sum		5000	5,000.00
Estimated cost for additional environmental items					89,940.00

VIII. MONITORING AND REPORTING

157. PMCU will monitor the progress of EMP implementation in the different subproject jurisdictions. The PMCU and PIU will undertake site inspections and document review to verify compliance with the EMP and progress toward the final outcome. The contractor will conduct day to day implementation of the SEMP.

158. The contractor will submit monthly reports to the PIU with jurisdiction over the subproject sites. The monthly reports will include compilation of copies of monitoring sheets accomplished and duly signed by the contractor's EHS supervisor (or equivalent) on a daily basis. A sample daily monitoring sheet which can be used by the contractors is in **Appendix 14**. This monitoring sheet is indicative which can be further enhanced depending on the actual situations at subproject construction sites.

159. The PIU will submit quarterly environmental monitoring reports to PMCU, which will include summary of daily monitoring activities of contractor and results of any independent monitoring or inspection activities of the PIU. In the conduct of these independent inspection activities, PIU will be supported by PDSC in this regard. A sample inspection checklist is in **Appendix 15**. This checklist is indicative which can be further enhanced depending on the actual situations at subproject construction sites.

160. PMCU shall consolidate quarterly reports from the PIUs including Gazipur PIU and results of its independent monitoring or inspection activities. PMCU shall accomplish semi-annual environmental monitoring report (SEMRs), which shall be submitted to ADB for review and disclosure on ADB website. Submission of SEMR will continue until ADB issues a Project Completion Report. The template for the SEMR is attached as **Appendix 16**.

161. ADB will carry out the following monitoring actions to supervise the project implementation:

- (i) On a need basis, conduct site visits for subproject with potential adverse environmental or social impact;
- (ii) Conduct supervision missions with detailed review by ADB's environment/social safeguard specialists and/or officers and/or consultants for subprojects with adverse environmental and social impacts;
- (iii) Review the SEMRs submitted by PMCU to ensure that adverse impacts and risks are mitigated as planned in the EMP;
- (iv) Work with LGED to rectify to the extent possible any failures to comply with its environmental safeguard commitments, as covenanted in the loan agreement and elaborated in all environmental safeguard documents; and formulate and implement a corrective action plan to re-establish compliance as appropriate; and
- (v) Prepare a project completion report that assesses whether the objective and desired outcomes of the safeguard plans have been achieved, taking into account the baseline conditions and the results of monitoring.

162. ADB's monitoring and supervision activities are carried out on an on-going basis until a project completion report is issued. ADB issues a PCR within 1-2 years after the project is physically completed and in operation.

IX. CONCLUSION AND RECOMMENDATIONS

163. The proposed subproject is not an environmentally critical undertaking. IEE indicates that the proposed subproject, and its components, is not located within or adjacent to environmentally sensitive areas.

164. The extent of adverse impacts is expected to be local, confined within the projects' main areas of influence, waste disposal sites, and the routes to and from these sites. With mitigation measures in place and ensuring that the bulk of earthworks are completed before the onset of the rainy season, the potential adverse impacts during construction would be site-specific.

165. The few adverse impacts of moderate magnitude during construction will be temporary and short-term (i.e., most likely to occur only during peak construction activities). These will not be sufficient to threaten or weaken the surrounding resources. Mitigation measures, integral to socially and environmentally responsible construction practices, are commonly used at construction sites and are well known to contractors. Hence, mitigation measures would not be difficult to implement.

166. Based on the above findings, the classification of the subproject under Package No. CRDP-II/LGED/Narayanganj/Gazipur/ NCB/2018/W-01 as Category B per ADB SPS, 2009 is confirmed, and no further special study or detailed EIA needs to be undertaken.

Appendix 1: Rapid Environmental Assessment (REA) Checklist

Country/Project Title:	Bangladesh / City Regions Development Project - II
Subproject / Package No.:	Second CRDP/LGED/Narayanganj/Gazipur/ NCB/2018/W-01

Screening Questions	Yes	No	Remarks
A. Project Siting Is the project area adjacent to or within any of the following environmentally sensitive areas?			
▪ Cultural heritage site		√	
▪ Protected Area		√	
▪ Wetland		√	
▪ Mangrove		√	
▪ Estuarine		√	
▪ Buffer zone of protected area		√	
▪ Special area for protecting biodiversity		√	
B. Potential Environmental Impacts Will the Project cause...			
▪ encroachment on historical/cultural areas; disfiguration of landscape by road embankments, cuts, fills, and quarries?		√	
▪ encroachment on precious ecology (e.g. sensitive or protected areas)?		√	
▪ alteration of surface water hydrology of waterways crossed by roads, resulting in increased sediment in streams affected by increased soil erosion at construction site?	√		Construction and rehabilitation of roads and drainage will potentially increase siltation of surface waters near or along the alignments. However, this impact will be mitigated through implementation of measures in the EMP.
▪ deterioration of surface water quality due to silt runoff and sanitary wastes from worker-based camps and chemicals used in construction?	√		Construction and rehabilitation of roads and drainage will potentially increase siltation of surface waters near or along the alignments. However, this impact will be mitigated through implementation of measures in the EMP.

Screening Questions	Yes	No	Remarks
▪ increased local air pollution due to rock crushing, cutting and filling works, and chemicals from asphalt processing?		√	Rock crushing and asphalt processing will not be undertaken under the subproject.
▪ risks and vulnerabilities related to occupational health and safety due to physical, chemical, biological, and radiological hazards during project construction and operation during project construction and operation?	√		Construction activities will pose risks to workers. However, this can be mitigated through the implementation of the EMP particularly occupational health and safety measures both at work sites and construction camp sites.
▪ noise and vibration due to blasting and other civil works?	√		Construction activities will elevate noise levels and vibration. However, this can be mitigated through the implementation of the EMP.
▪ dislocation or involuntary resettlement of people?		√	Not anticipated. All works will be confirmed on existing road alignments.
▪ dislocation and compulsory resettlement of people living in right-of-way?		√	Not anticipated. All identified road alignments are free of settlements. No widening works is included.
▪ disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups?		√	
▪ other social concerns relating to inconveniences in living conditions in the project areas that may trigger cases of upper respiratory problems and stress?	√		Construction activities will potentially increase pollutant concentration in ambient air. However, this can be mitigated through the implementation of the EMP, particularly on implementing both the community and occupational EHS measures.
▪ hazardous driving conditions where construction interferes with pre-existing roads?	√		Construction activities may pose hazardous driving conditions at the sites. However, the implementation of the Traffic Management Plan will mitigate this impact.
▪ poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of communicable diseases (such as STI's and HIV/AIDS) from workers to local populations?	√		Construction activities may result to poor sanitation and improper solid waste handling and disposal. However, the implementation of the EMP will mitigate this impact.
▪ creation of temporary breeding habitats for diseases such as those transmitted by mosquitoes and rodents?	√		The EMP provides measures to avoid proliferation of disease vectors.
▪ accident risks associated with increased vehicular traffic, leading to accidental spills of toxic materials?		√	Not anticipated.

Screening Questions	Yes	No	Remarks
<ul style="list-style-type: none"> increased noise and air pollution resulting from traffic volume? 	√		Construction activities will elevate noise levels and worsen air pollution due to traffic. However, the TMP will provide measures to avoid traffic congestion at subproject sites.
<ul style="list-style-type: none"> increased risk of water pollution from oil, grease and fuel spills, and other materials from vehicles using the road? 		√	Not anticipated.
<ul style="list-style-type: none"> social conflicts if workers from other regions or countries are hired? 		√	Labor requirements will be sourced locally.
<ul style="list-style-type: none"> large population influx during project construction and operation that causes increased burden on social infrastructure and services (such as water supply and sanitation systems)? 		√	Labor requirements will be sourced locally.
<ul style="list-style-type: none"> risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during construction and operation? 	√		Construction activities will pose risks to community health and safety. However, the EMP provides measures to mitigate this impact, including adoption of the WB EHS guidelines on construction and decommissioning relating to community health and safety.
<ul style="list-style-type: none"> community and occupational safety risks due to both accidental and natural causes, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning. 	√		Construction activities will pose risks to community health and safety. However, the EMP provides measures to mitigate this impact, including adoption of the WB EHS guidelines on construction and decommissioning relating to community and occupational health and safety.

A Checklist for Preliminary Climate Risk Screening

Country/Project Title: Bangladesh / City Regions Development Project - II

Subproject / Package No. :

Screening Questions		Score	Remarks ²¹
Location and Design of project	Is siting and/or routing of the project (or its components) likely to be affected by climate conditions including extreme weather related events such as floods, droughts, storms, landslides?	1	
	Would the project design (e.g. the clearance for bridges) need to consider any hydro-meteorological parameters (e.g., sea-level, peak river flow, reliable water level, peak wind speed etc)?	1	
Materials and Maintenance	Would weather, current and likely future climate conditions (e.g. prevailing humidity level, temperature contrast between hot summer days and cold winter days, exposure to wind and humidity hydro-meteorological parameters likely affect the selection of project inputs over the life of project outputs (e.g. construction material)?	1	
	Would weather, current and likely future climate conditions, and related extreme events likely affect the maintenance (scheduling and cost) of project output(s) ?	1	
Performance of project outputs	Would weather/climate conditions, and related extreme events likely affect the performance (e.g. annual power production) of project output(s) (e.g. hydro-power generation facilities) throughout their design life time?	1	

Options for answers and corresponding score are provided below:

Response	Score
Not Likely	0
Likely	1
Very Likely	2

Responses when added that provide a score of 0 will be considered low risk project. If adding all responses will result to a score of 1-4 and that no score of 2 was given to any single response, the project will be assigned a medium risk category. A total score of 5 or more (which include providing a score of 1 in all responses) or a 2 in any single response, will be categorized as high risk project.

Result of Initial Screening (Low, Medium, High): Medium

Other Comments: _____

Prepared by: _____

²¹ If possible, provide details on the sensitivity of project components to climate conditions, such as how climate parameters are considered in design standards for infrastructure components, how changes in key climate parameters and sea level might affect the siting/routing of project, the selection of construction material and/or scheduling, performances and/or the maintenance cost/scheduling of project outputs.

**Appendix 2: Template for Application for Environmental Clearance Certificate from
Bangladesh Department of Environment**

Application for Environmental Clearance Certificate

[See Rule 7(5) of ECR]

Director/Deputy Director
Department of Environment
Dhaka Division/Chittagong Division/Khulna Division/Rajshahi Division (Bogra),

Sir,

I do hereby apply for Environmental Clearance Certificate for my proposed industrial unit or project, or for the existing industrial unit or project, and enclose papers and furnish information as follows:

1. (a) Name of the industrial unit or project :
Address of location of the industrial unit of Project :
(b) Address of the present office :
2. (a) Proposed industrial unit or project :
Expected date of starting construction :
Expected date for completion of construction :
Expected date of trial production, in case of industrial unit, in :
other cases, date of starting operation of the project :
(b) Existing industrial unit or project :
Date of starting trial production in case of industrial unit, in :
other cases, date of starting operation of the project :
3. Name of product and quantity to produced :
(daily/monthly/yearly)
4. (a) Name of raw material and quantity :
(daily/monthly/yearly)
(b) Source of raw material :
5. (a) Quantity of water to be used daily :
(b) Source of water :
6. (a) Name of fuel and quantity (daily/monthly/yearly) :
(b) Source of fuel :
7. (a) Probable quantity of daily liquid waste :
(b) Location of waste discharge :
(c) Probable quantity of daily emission of gaseous :
substance :
(d) Mode of emission of gaseous substance :
8. Mouza (village) map indicating "Daag" (plot) and "Khatiyani" :
(land tax account) number
9. Approval of Rajdhani Unnayan Katiripakkhya / Chittagong :
Development Authority / Khulna Development Authority /
Local Authority (if applicable)
10. (a) Design and time schedule of proposed Effluent :
Treatment Plant :
(b) Fund allocated :

- (c) Area :
- 11. Process Flow Diagram :
- 12. (a) Location map of industrial unit or project :
- (b) Layout plan (with location of Effluent Treatment Plant) :
- 13. (a) IEE / EIA report * (if applicable) :
- (b) Environmental Management Plan*(if applicable) :
- 14. Feasibility Report (if applicable) :

Seal

Signature of the entrepreneur:

Name:

Address:

Phone:

Date:



Declaration

I do hereby declare that all information provided by me in this application are true to the best of my knowledge and no information has been concealed or distorted.

Name and Signature of Entrepreneur

* Each page must be countersigned by the person who fills out this application form and by the entrepreneur.

[illegible]

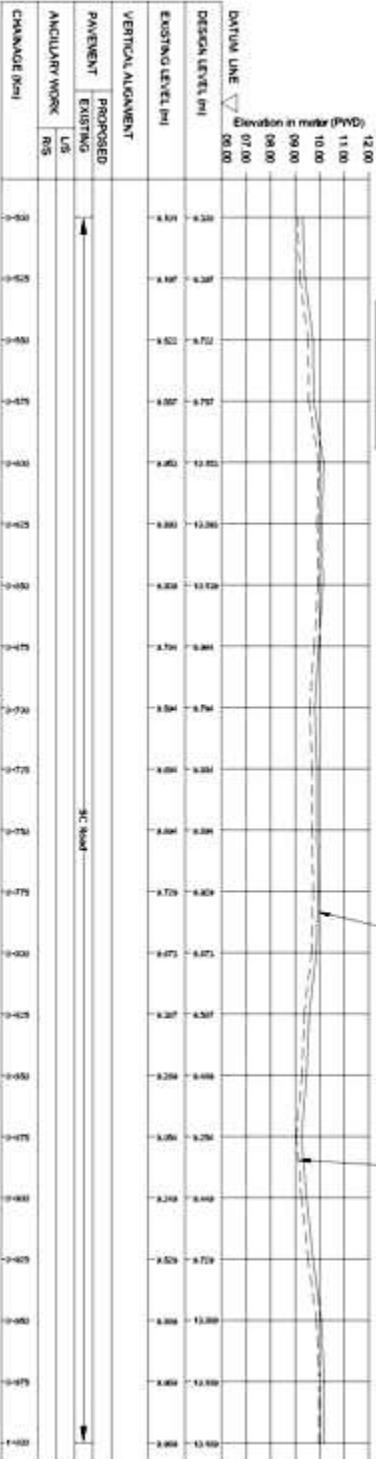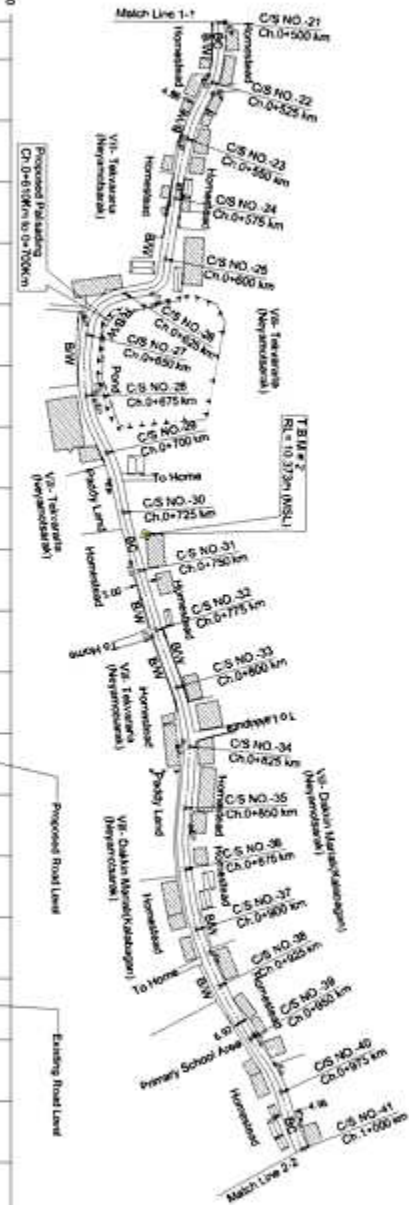

VERTICAL ALIGNMENT	PAVEMENT		CHANGING POINT
	PROPOSED EXISTING	L/S	
			-600
			-625
			-650
			-675
			-700
			-725
			-750
			-775
			-800
			-825
			-850
			-875
			-900
			-925
			-950
			-975
			-1000


- LEGEND**
- 1) Structure - permanent, semi-permanent, Tn shed, hotel
 - 2) Boundary Road, RCC Road, HBB Road
 - 3) Road, Road, covered Road, Footpath
 - 4) Bridge, Sea coast, Pipe culvert
 - 5) Road, River, Ditch, Embankment
 - 6) BVI, Boundary Limit, Water Boundary, Railway Limit
 - 7) Electric Road (EP), Tower, Pedestrian (Telegraph) Pole,
 - 8) Beach Mark (BM), Temporary Beach Mark (TBM)
 - 7) Mangrove, the Ghat, Tomb, Church, Temple, Cemetery
 - 9) Mangro, Jarakul, Pines, Coronal, Bamboo & other Tree
 - 9) Dam, Proposed Dam
 - 10) Ghat Line
 - 10) Existing C/L, Profile, Design C/L, Profile

-

Note :

At Heights, in Terms of MSU, Dorian (Noble)
Highland Flood Levees 70381 (1998) Local Information
Noble Flood Levees in 500m Local Information
B.N. No.004, Gained from Top of R.C.C Pillar At Main Balaram School Field,
Jyotipour, Gazipur
8m-00m, Ht.=10.50m (MSL)


01 T.B.M. R2 Road on the NE Corner Pillar Levee House of Mr. Saurav
Vishwakarma, Kalyanpur, Gazipur. As Shown in the Drawing
T.B.M. Ht.=10.37m (MSL)



LOCAL GOVERNMENT ENGINEERING DEPARTMENT

[illegible]




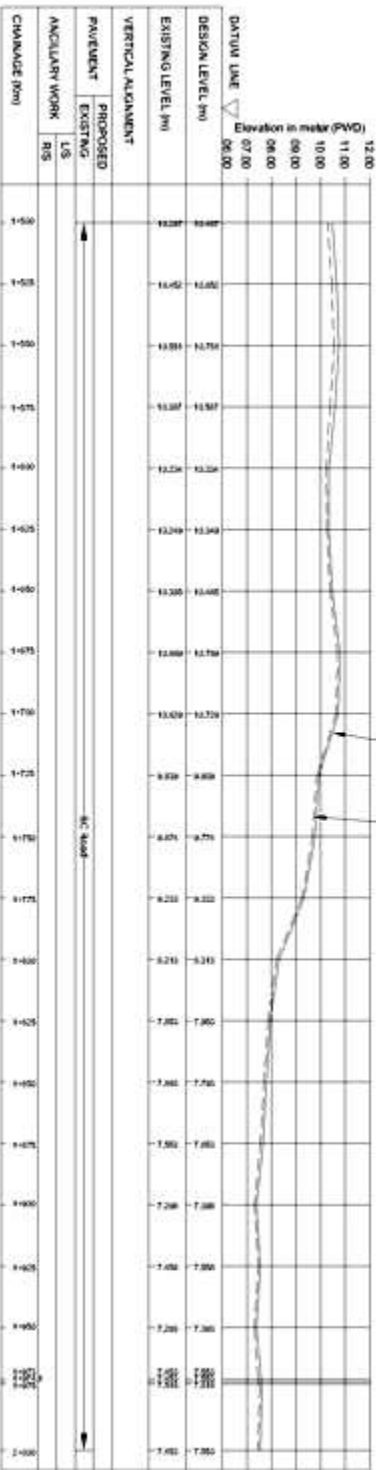

As Height/Weight in Terms of MSL, Datum (Metry)	
Highest Floor Level=700m (1998) Local Information	
Normal Floor Level =500m Local Information	
B.U.M. No.054. Carried from Top of R.C.C Pillar At Near Blacksmiths Shoppe Floor	
Approximate. Gzqozor	
B.M. 054. H.C.10.356m (MSL)	
1) B.M. #3 Kept on the S/E Corner Plinth Level Shop of Mr. Teym Uddin, at Vill. Maran Jamalia, Gzqozor	
B.U.M. R.L.#10 711m (MSL)	As Shown in the Drawing



- LEGEND:**
- 1) Structure: Permanent, Semi-permanent, Temporary
 - 2) Broomfield Road, MCC Road, I-49 Road
 - 3) Road: Earthen Road, Paved
 - 4) Bridge: Box culvert, Pipe culvert
 - 5) Road: Dual, Extra-wide
 - 6) Bypass: Bypass Line, New Bypass, Railway Line
 - 7) Electric Pole (E/P), Tower, Telegraph Pole (Telegraph Pole)
 - 8) Branch Mark (BM), Temporary Branch Mark (TBM)
 - 9) Structure: Flat land, Trench, Church, Temple, Cemetery
 - 10) Bridge: Jackson, Park, Central, Bamboo & other Tree
 - 11) Canal, Proposed Drain
 - 12) Gas Line
 - 13) Existing CL, Profile, Design CL, Profile



LOCAL GOVERNMENT ENGINEERING DEPARTMENT			
DSC		DMCU	
POSITION #	ACCOMMODATION #	POSITION #	ACCOMMODATION #
	LA REVENUE FUND		LA REVENUE FUND
CITY REGION DEVELOPMENT PROJECT II (CDMP-II)			
PDS Consultants, Hilti is association with OGA Inc, AQUA BETS and RPMC		GASPAR CITY CORPORATION	
No. of Positions 1 Position Title PDS CONSULTANT		No. of Positions 1 Position Title PDS CONSULTANT	
Name of Owner City of Gaspar 1000 N. 10th Street Gaspar, MI 48130-1000		Name of Owner Gaspar City Corporation 1000 N. 10th Street Gaspar, MI 48130-1000	
Name of Architect Hilti 1000 N. 10th Street Gaspar, MI 48130-1000		Name of Architect Hilti 1000 N. 10th Street Gaspar, MI 48130-1000	
Name of Engineer RPMC 1000 N. 10th Street Gaspar, MI 48130-1000		Name of Engineer RPMC 1000 N. 10th Street Gaspar, MI 48130-1000	
Name of Surveyor AQUA BETS 1000 N. 10th Street Gaspar, MI 48130-1000		Name of Surveyor AQUA BETS 1000 N. 10th Street Gaspar, MI 48130-1000	
Name of Consultant OGA Inc 1000 N. 10th Street Gaspar, MI 48130-1000		Name of Consultant OGA Inc 1000 N. 10th Street Gaspar, MI 48130-1000	
Name of Other None		Name of Other None	






-

At Heights, in Terms of MSL, Datum (Maid)
Highest Flood Level: 700m, (1986) Local Information
Normal Flood Level: in 550m, Local Information
B.M. No. 954, Cased from Top of R.C.C Pillar At River Stations 5000, Fished
by Jangam, Gazipur
B.M. 954, R.L. = 10.35m (MSL)
01 T.M. # 4 Kept on the NW Corner Top Slab of Bridge At Vil-Batali,
Gazipur, As Shown in the Drawing.
B.M. R.L. = 11.4m (MSL)

LOCAL GOVERNMENT ENGINEERING DEPARTMENT				
P D S C		P M C U		
DESIGNED BY PROJECT ENGINEER	APPROVED BY LOCAL ENGINEER	DESIGNED BY PROJECT ENGINEER	APPROVED BY LOCAL ENGINEER	APPROVED BY LOCAL ENGINEER
CITY AEROSOL DEVELOPMENT PROJECT (CDDP)				
F05 Consultants, Hefly in association with Odeh Inc. AQUA, BETS and SPNC				
GAZILUR CITY CORPORATION				
Name of Plant: "Bottle Aerosol Plant" Supply from PDC, used to store 70" (approx) Aerosol Propellant				
Type: Plant is located in the industrial area of the city.				
City: PDC is located in the industrial area of the city.				
DESIGNED BY PROJECT ENGINEER	APPROVED BY LOCAL ENGINEER	DESIGNED BY PROJECT ENGINEER	APPROVED BY LOCAL ENGINEER	APPROVED BY LOCAL ENGINEER
DATE: 10/10/2011	DATE: 10/10/2011	DATE: 10/10/2011	DATE: 10/10/2011	DATE: 10/10/2011

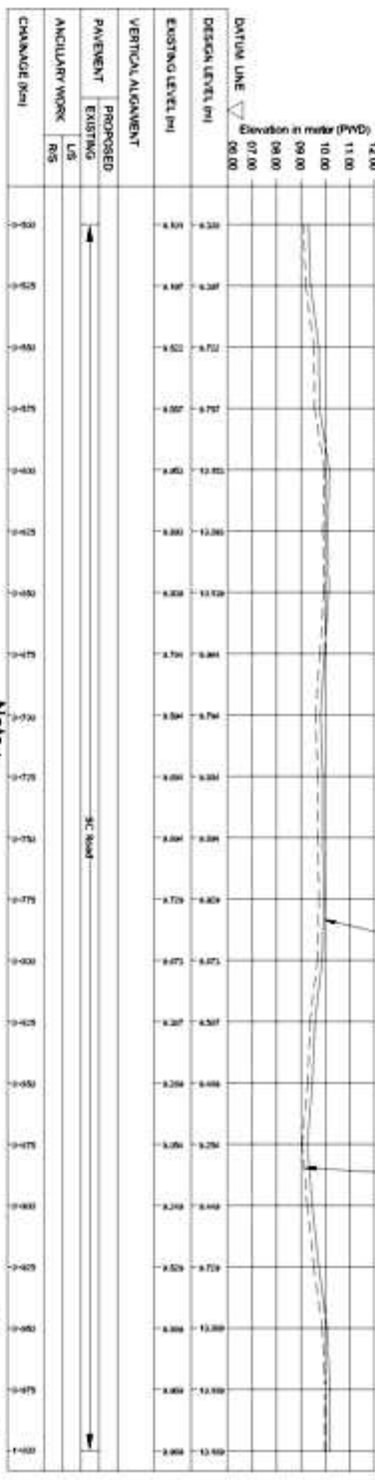


GAZIPUR CITY CORPORATION

[illegible]






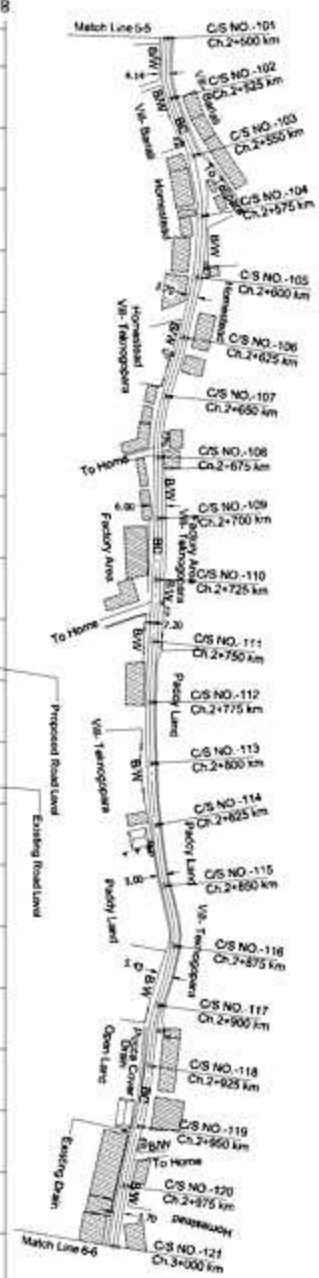


- At Heights, in Terms of MSL, (Dated, Males)
Highest Flood Level: 700m, (Global Information)
Normal Flood Level: in 550m, Local Information
B.M. No. 624, Canceled from Top of R.C.C Pillar At Shani Shakhani Sarani, Firozpur, Jalandhar, Gujarat
B.M. No. 624, R.L. = 10.35m (MSL)
01 T.M. of 4 kept on the NW Corner Top Slab of Bridge, At Vi-Satani, Gujarat, As Shown in the Drawing.
B.M. R.L. = 114m (MSL)

[illegible]



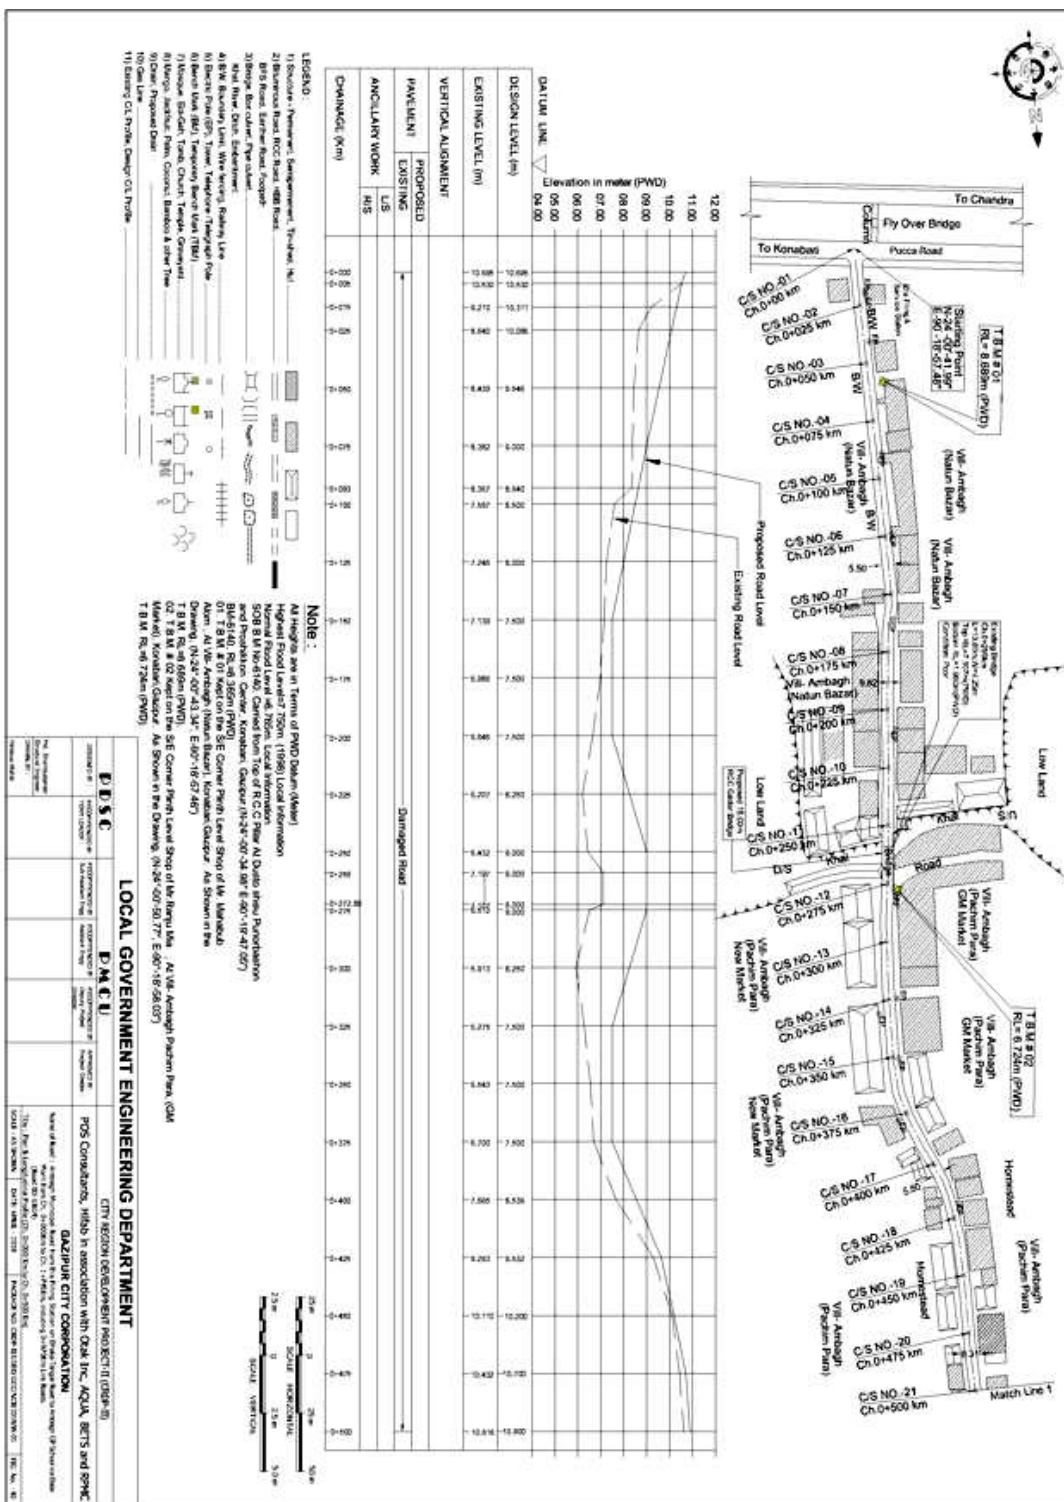


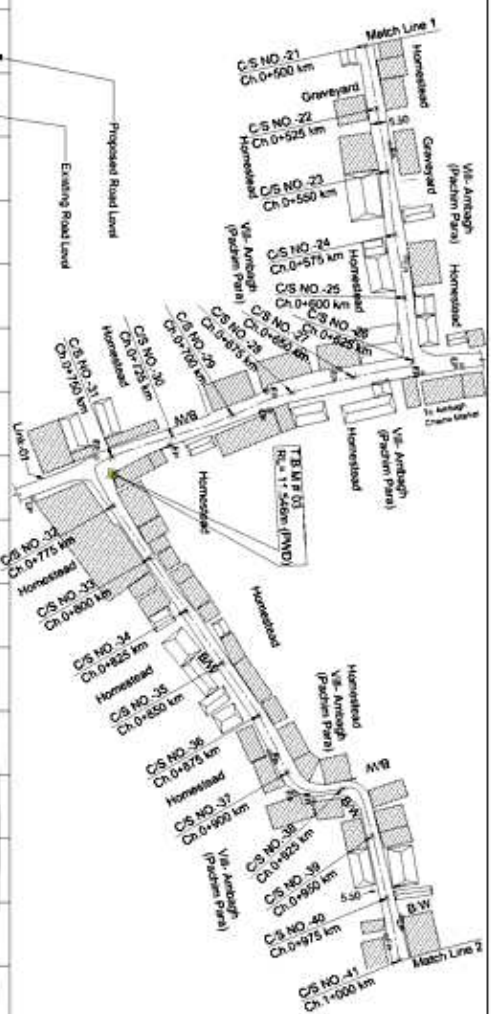

LOCAL GOVERNMENT ENGINEERING DEPARTMENT


[illegible]

[illegible]

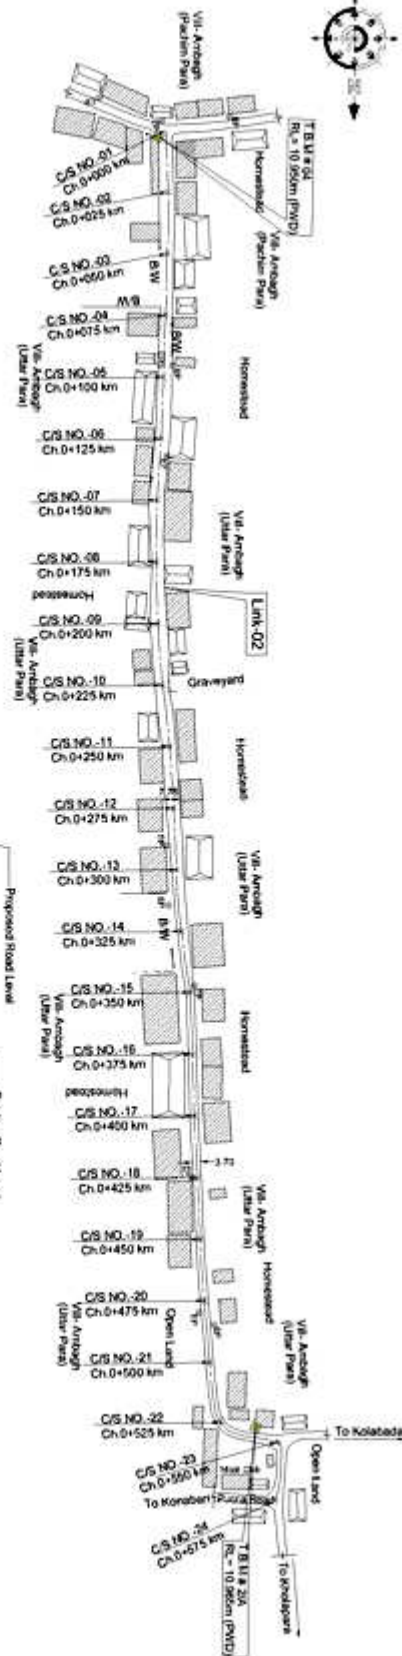[illegible]


1) **Structure:** Physical Disposition of the parts of a system.
2) **Relationships:** Physical, Chemical, Electrical, Mechanical, etc.
3) **Flow:** The path of the flow of material, energy, information, etc.
4) **Control:** The means of controlling the system.
5) **Performance:** The ability of the system to perform its function.
6) **Cost:** The expense of the system.
7) **Reliability:** The ability of the system to perform its function without failure.
8) **Maintainability:** The ability of the system to be maintained.
9) **Interoperability:** The ability of the system to work with other systems.
10) **Flexibility:** The ability of the system to adapt to changing requirements.
11) **Scalability:** The ability of the system to be scaled up or down.
12) **Portability:** The ability of the system to be moved from one location to another.
13) **Security:** The ability of the system to be protected from unauthorized access.
14) **Privacy:** The ability of the system to protect information from unauthorized access.
15) **Integrity:** The ability of the system to maintain the accuracy and consistency of its data.
16) **Availability:** The ability of the system to be accessible when needed.
17) **Performance:** The ability of the system to perform its function within a specified time frame.
18) **Cost:** The expense of the system.
19) **Reliability:** The ability of the system to perform its function without failure.
20) **Maintainability:** The ability of the system to be maintained.
21) **Interoperability:** The ability of the system to work with other systems.
22) **Flexibility:** The ability of the system to adapt to changing requirements.
23) **Scalability:** The ability of the system to be scaled up or down.
24) **Portability:** The ability of the system to be moved from one location to another.
25) **Security:** The ability of the system to be protected from unauthorized access.
26) **Privacy:** The ability of the system to protect information from unauthorized access.
27) **Integrity:** The ability of the system to maintain the accuracy and consistency of its data.
28) **Availability:** The ability of the system to be accessible when needed.
29) **Performance:** The ability of the system to perform its function within a specified time frame.
30) **Cost:** The expense of the system.
31) **Reliability:** The ability of the system to perform its function without failure.
32) **Maintainability:** The ability of the system to be maintained.
33) **Interoperability:** The ability of the system to work with other systems.
34) **Flexibility:** The ability of the system to adapt to changing requirements.
35) **Scalability:** The ability of the system to be scaled up or down.
36) **Portability:** The ability of the system to be moved from one location to another.
37) **Security:** The ability of the system to be protected from unauthorized access.
38) **Privacy:** The ability of the system to protect information from unauthorized access.
39) **Integrity:** The ability of the system to maintain the accuracy and consistency of its data.
40) **Availability:** The ability of the system to be accessible when needed.
41) **Performance:** The ability of the system to perform its function within a specified time frame.
42) **Cost:** The expense of the system.
43) **Reliability:** The ability of the system to perform its function without failure.
44) **Maintainability:** The ability of the system to be maintained.
45) **Interoperability:** The ability of the system to work with other systems.
46) **Flexibility:** The ability of the system to adapt to changing requirements.
47) **Scalability:** The ability of the system to be scaled up or down.
48) **Portability:** The ability of the system to be moved from one location to another.
49) **Security:** The ability of the system to be protected from unauthorized access.
50) **Privacy:** The ability of the system to protect information from unauthorized access.
51) **Integrity:** The ability of the system to maintain the accuracy and consistency of its data.
52) **Availability:** The ability of the system to be accessible when needed.
53) **Performance:** The ability of the system to perform its function within a specified time frame.
54) **Cost:** The expense of the system.
55) **Reliability:** The ability of the system to perform its function without failure.
56) **Maintainability:** The ability of the system to be maintained.
57) **Interoperability:** The ability of the system to work with other systems.
58) **Flexibility:** The ability of the system to adapt to changing requirements.
59) **Scalability:** The ability of the system to be scaled up or down.
60) **Portability:** The ability of the system to be moved from one location to another.
61) **Security:** The ability of the system to be protected from unauthorized access.
62) **Privacy:** The ability of the system to protect information from unauthorized access.
63) **Integrity:** The ability of the system to maintain the accuracy and consistency of its data.
64) **Availability:** The ability of the system to be accessible when needed.
65) **Performance:** The ability of the system to perform its function within a specified time frame.
66) **Cost:** The expense of the system.
67) **Reliability:** The ability of the system to perform its function without failure.
68) **Maintainability:** The ability of the system to be maintained.
69) **Interoperability:** The ability of the system to work with other systems.
70) **Flexibility:** The ability of the system to adapt to changing requirements.
71) **Scalability:** The ability of the system to be scaled up or down.
72) **Portability:** The ability of the system to be moved from one location to another.
73) **Security:** The ability of the system to be protected from unauthorized access.
74) **Privacy:** The ability of the system to protect information from unauthorized access.
75) **Integrity:** The ability of the system to maintain the accuracy and consistency of its data.
76) **Availability:** The ability of the system to be accessible when needed.
77) **Performance:** The ability of the system to perform its function within a specified time frame.
78) **Cost:** The expense of the system.
79) **Reliability:** The ability of the system to perform its function without failure.
80) **Maintainability:** The ability of the system to be maintained.
81) **Interoperability:** The ability of the system to work with other systems.
82) **Flexibility:** The ability of the system to adapt to changing requirements.
83) **Scalability:** The ability of the system to be scaled up or down.
84) **Portability:** The ability of the system to be moved from one location to another.
85) **Security:** The ability of the system to be protected from unauthorized access.
86) **Privacy:** The ability of the system to protect information from unauthorized access.
87) **Integrity:** The ability of the system to maintain the accuracy and consistency of its data.
88) **Availability:** The ability of the system to be accessible when needed.
89) **Performance:** The ability of the system to perform its function within a specified time frame.
90) **Cost:** The expense of the system.
91) **Reliability:** The ability of the system to perform its function without failure.
92) **Maintainability:** The ability of the system to be maintained.
93) **Interoperability:** The ability of the system to work with other systems.
94) **Flexibility:** The ability of the system to adapt to changing requirements.
95) **Scalability:** The ability of the system to be scaled up or down.
96) **Portability:** The ability of the system to be moved from one location to another.
97) **Security:** The ability of the system to be protected from unauthorized access.
98) **Privacy:** The ability of the system to protect information from unauthorized access.
99) **Integrity:** The ability of the system to maintain the accuracy and consistency of its data.
100) **Availability:** The ability of the system to be accessible when needed.


[illegible]

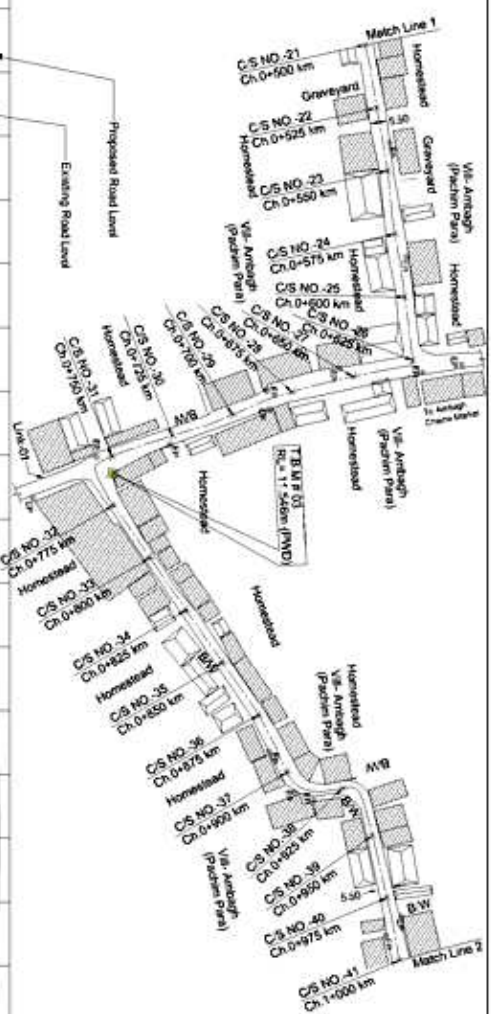


LOCAL GOVERNMENT ENGINEERING DEPARTMENT



[illegible]

[illegible][illegible]

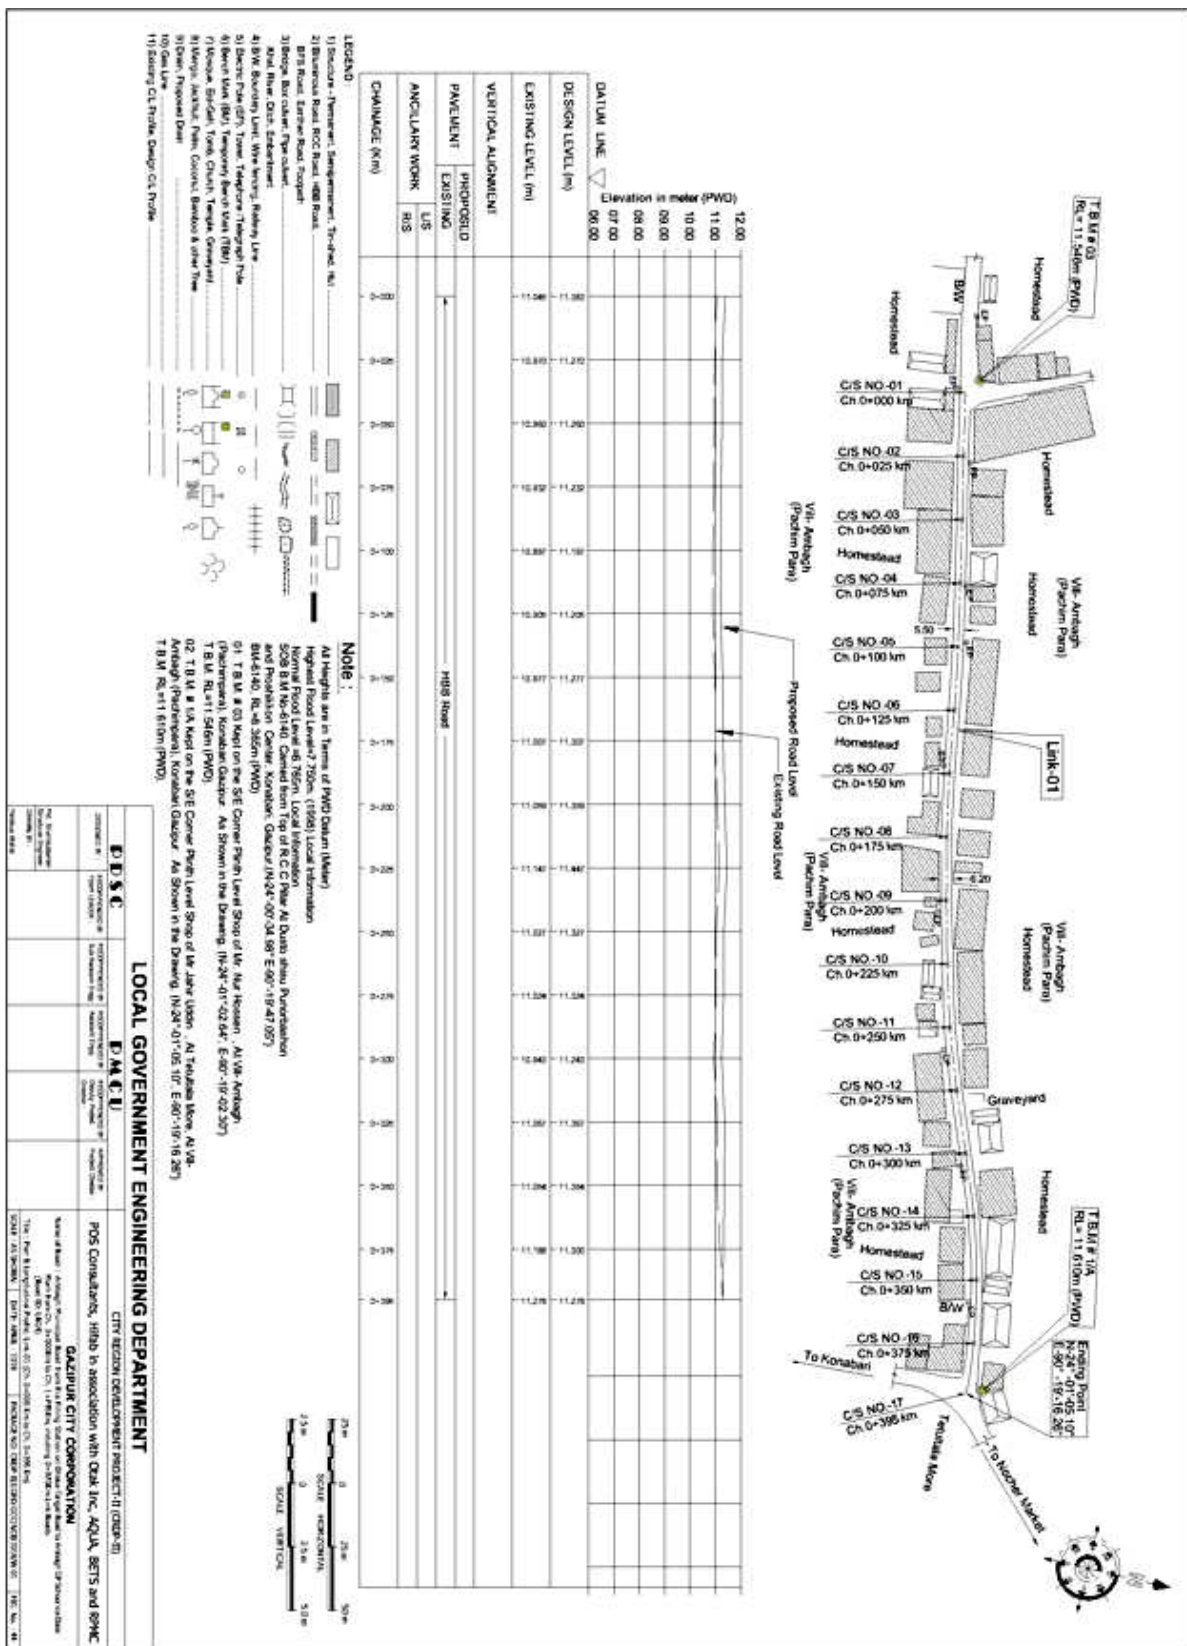



Appendix 5: Strip Maps of Subproject Alignments IUT to Icarakandi Road And Signboard to Kamarjuri Road (ID- LRG6)

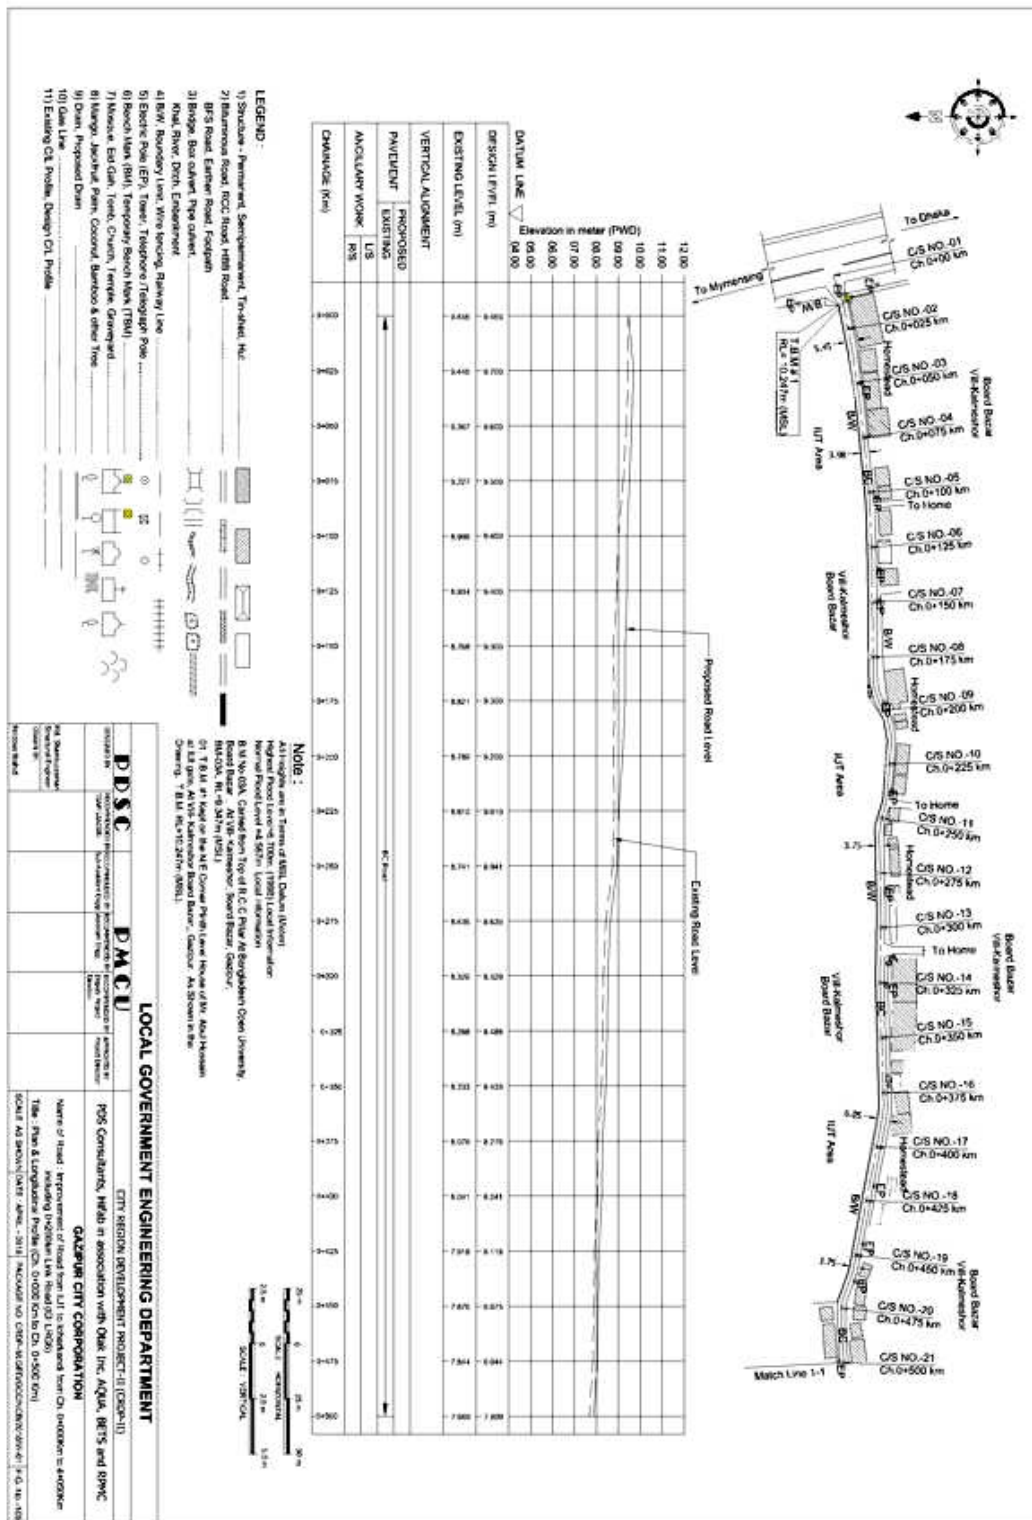


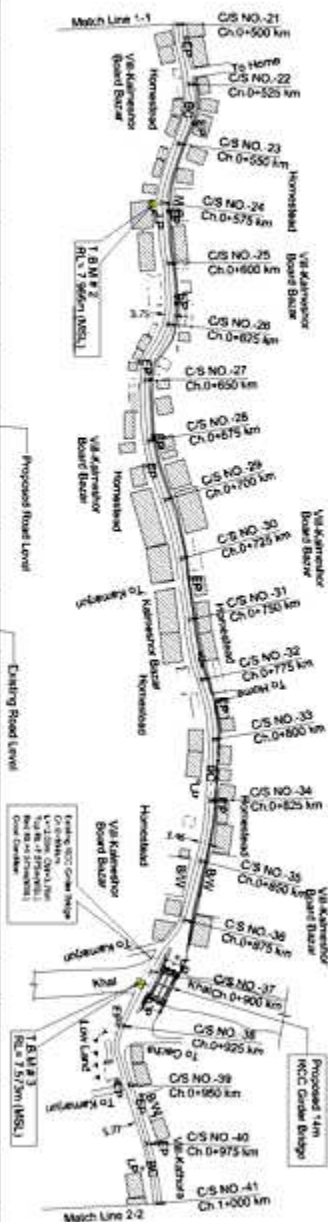[illegible][illegible]

- LEGEND:
- 1) Structure : Permanent, Semi-permanent, Temporary, H/d
 - 2) Burmese Road : ICC Road, Jeth Road,
 - 3) Road : Road, Express Road, Freeway
 - 4) Bridge : Box culvert, Pipe culvert,
 - 5) River, Canal, Embankment, Water channel, Railway Line
 - 6) Electric Pole (EP), Tower, Telephone Telegraph Pole
 - 7) Electric Line (EL), Temporary Electric Line (TEL)
 - 8) Mosque, Jeti Gadi, Jamb, Church, Temple, Cemetery
 - 9) Dam, Artificial Farm, Coconut, Bamboo, other Tree
 - 10) Drain, Flooded Drain
 - 11) Canal Line
 - 12) Existing CL Profile, Design CL Profile

[illegible]

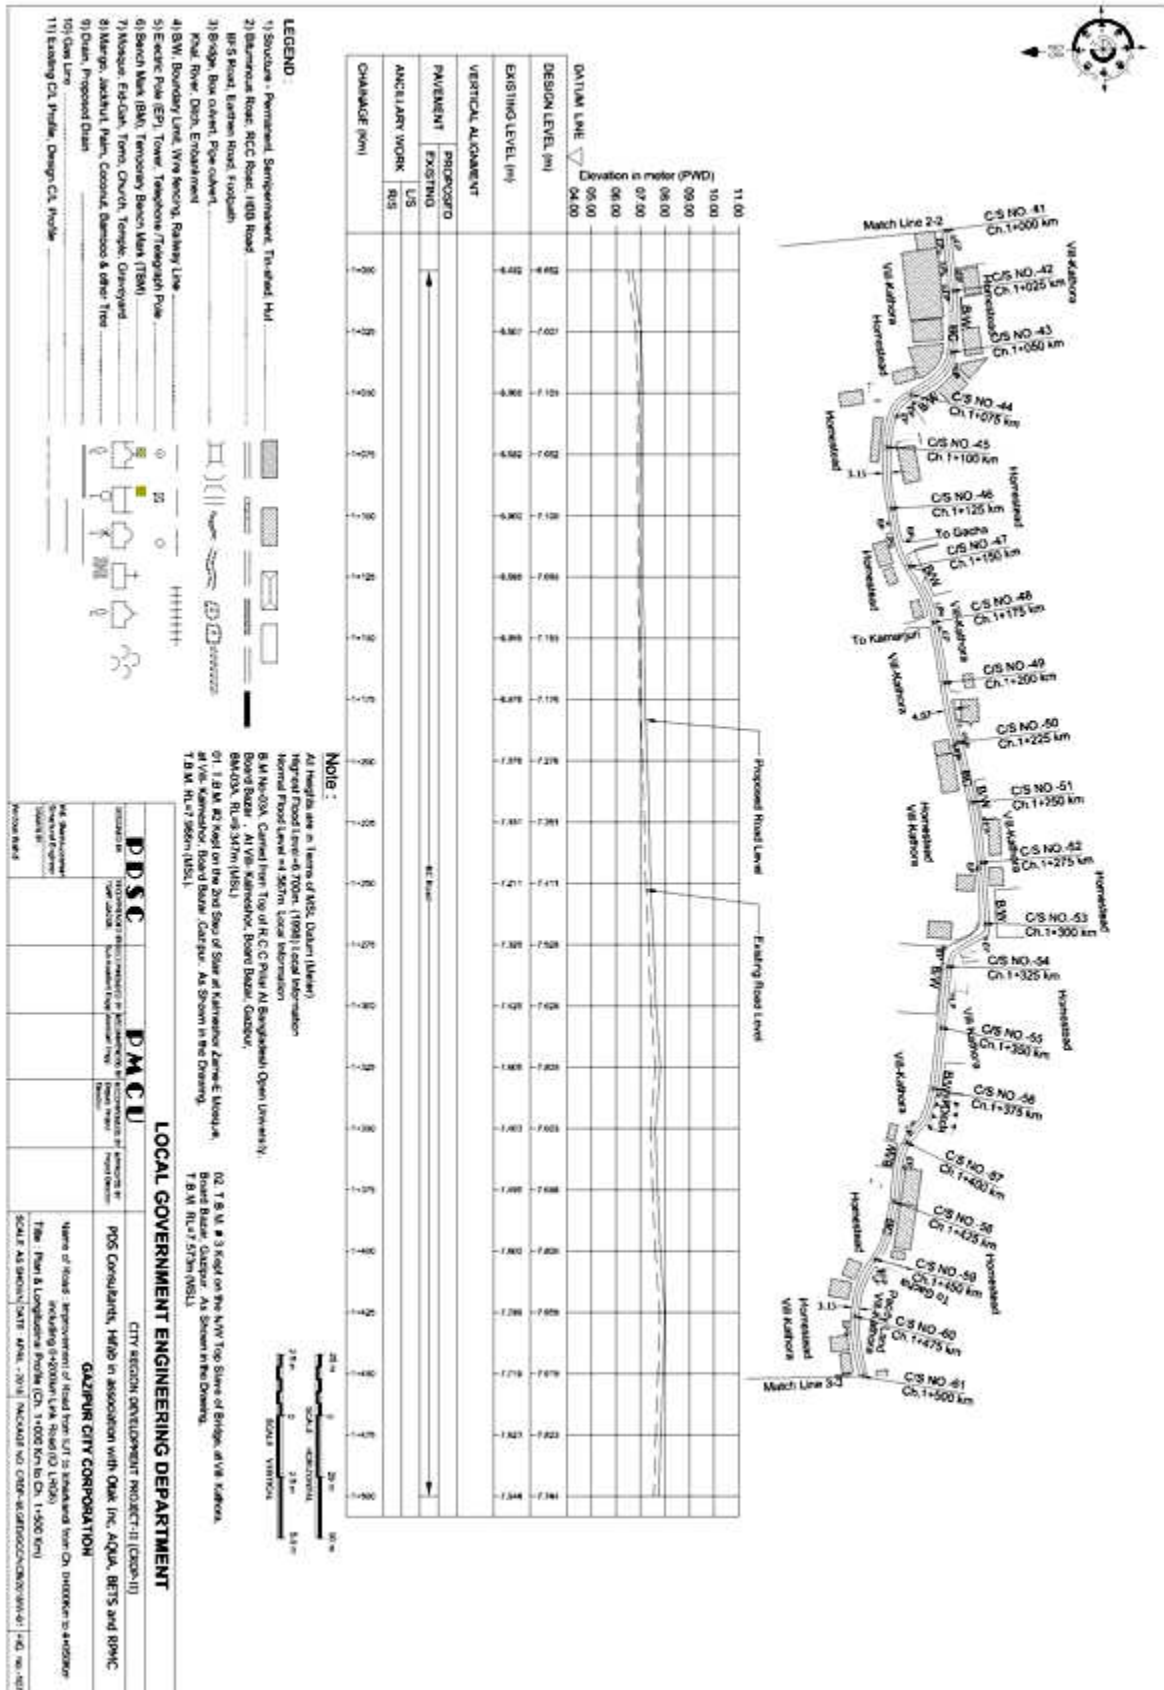

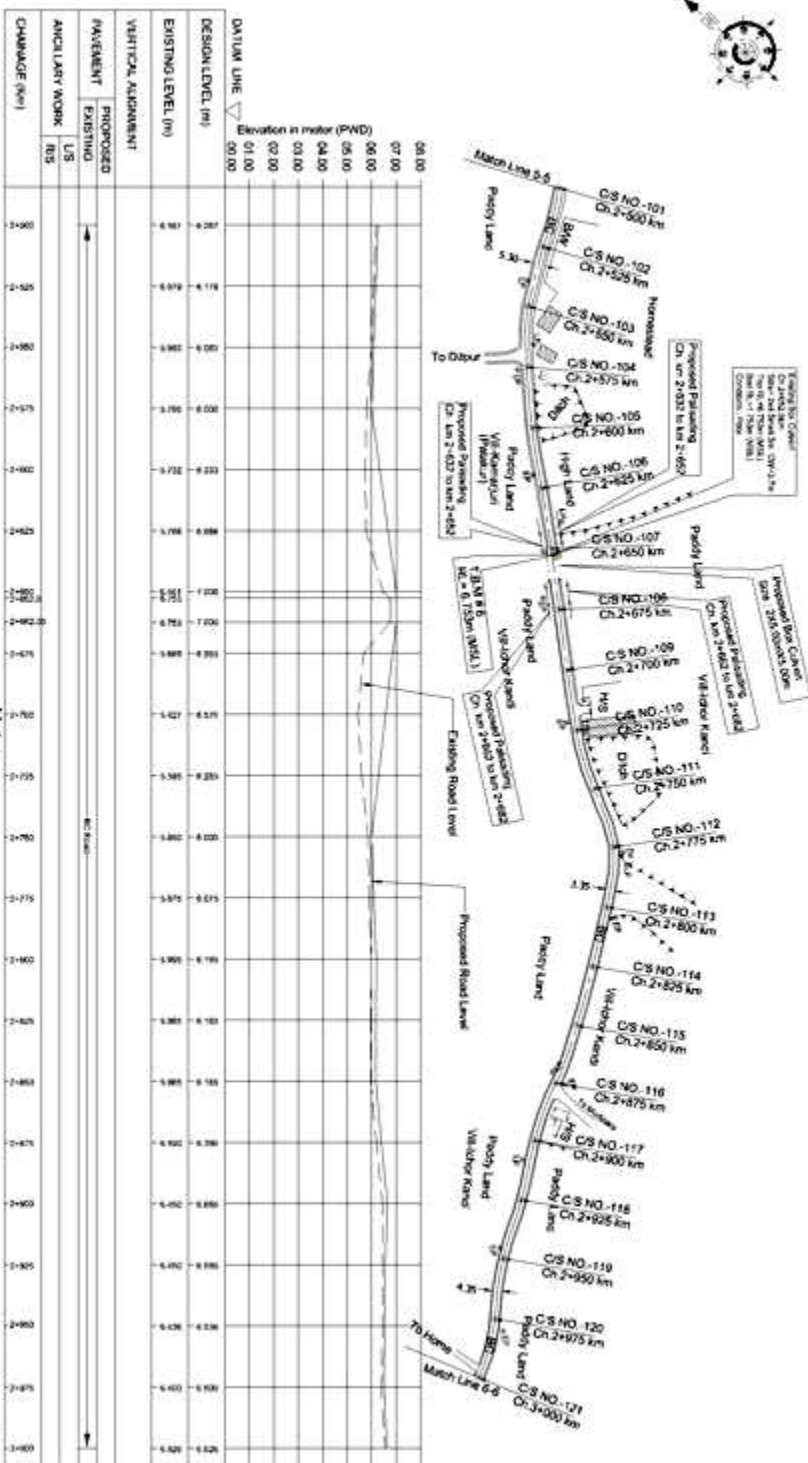

Note :


All Heights are in Terms of MSL, Datum (Mean)
 Highest Flood Level: 7.00m (1998) Local Information
 Normal Flood Level: 4.50m, Local Information
 B.M. No. 104, Carved from Top of R.C.C. Pillar at Bangladesh Open University,
 Board Bazar, At Vile, Karmashar, Board Bazar, Gajipur.
 B.M. No. 105, R.L. 4.37m (MSL)
 O.T. T.B.M. # 6 is kept on the NE Corner Top Stone of Bridge, At Vile,
 Karmashar, Board Bazar, Gajipur. As Shown in the Drawing.
 T.B.M. R.L. 4.75m (MSL).



LOCAL GOVERNMENT ENGINEERING DEPARTMENT

DSC		MACU		LOCAL GOVERNMENT ENGINEERING DEPARTMENT	
DESIGNED BY	DATE	DESIGNED BY	DATE	CITY REGION DEVELOPMENT PROJECT-II (CRDP-II)	
CHECKED BY	DATE	CHECKED BY	DATE	PGS Consultants, Field in association with Oak Inc. AQUA, BETS and RPPC	
APPROVED BY	DATE	APPROVED BY	DATE	GAZIPUR CITY CORPORATION	
Name of Road: Improvement of Road from JUT to Karmashar near Ch. 1400m to 4400m		Name of Road: Improvement of Road from JUT to Karmashar near Ch. 1400m to 4400m		Scale: As shown in the drawing. 1:1000	
Title: Plan & Longitudinal Profile (Ch. 2+500 km to Ch. 3+000 km)		Title: Plan & Longitudinal Profile (Ch. 2+500 km to Ch. 3+000 km)		Scale: As shown in the drawing. 1:1000	

- LEGEND :**
- 1) Structure - Permanent, Semi-permanent, Temporary, etc.
 - 2) Burmable Road, RCC Road, PCC Road, etc.
 - 3) Road, Burmable Road, etc.
 - 4) Bridge, Box Culvert, Pipe Culvert, etc.
 - 5) River, Canal, Embankment, etc.
 - 6) Boundary Line, etc.
 - 7) Boundary Line, etc.
 - 8) Boundary Line, etc.
 - 9) Boundary Line, etc.
 - 10) Boundary Line, etc.

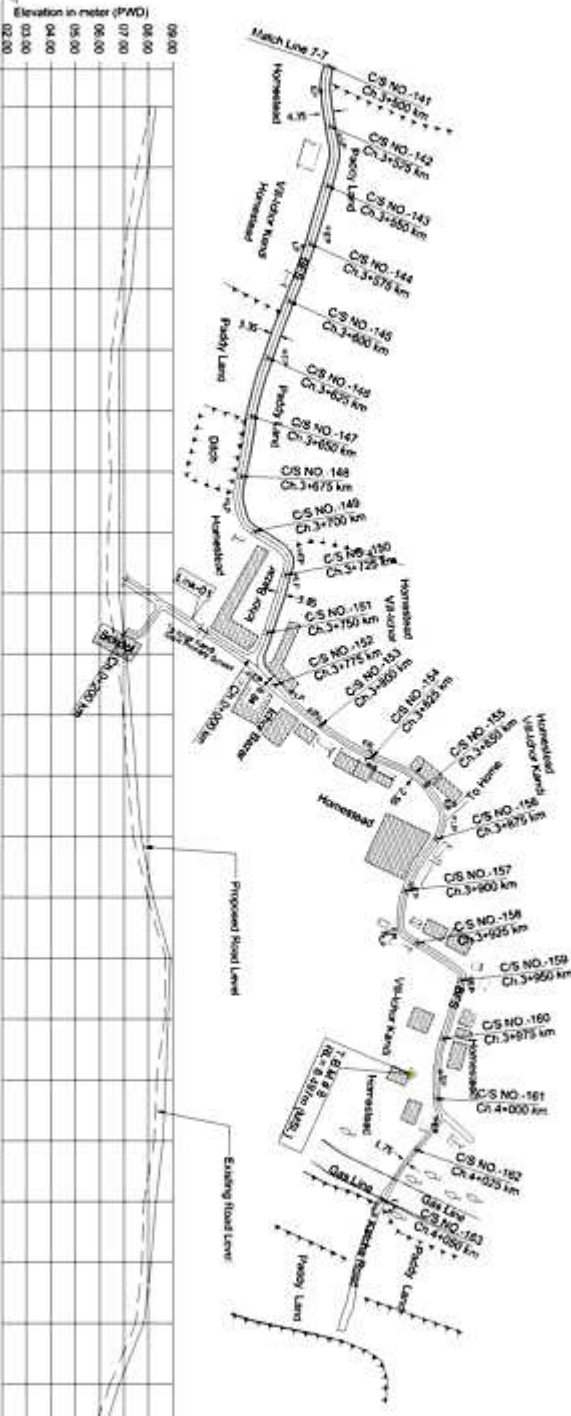



Closing: 7:00 PM. All other times.

CITY REGION DEVELOPMENT PROJECT-11 (CROP-11)
FOS Consultants, Hybrid in association with O&A, AQUA, BETS and RPHC

[illegible]

LEGEND :

- 1) Shikara - Permanent, Semi-permanent, Tri-nethal, H/L
- 2) Aksharam Road, RCC Road, 1100 Road.
- 3) Road, Earthen Road, Footpath
- 4) g/s Road, Chalk, Pipe Chalk
- 5) Bridge, River, Ditch, Embankment
- 6) B/W, Boundary Line, Wire fencing, Railway Line
- 7) Electric Pole (E/P), Tower, Telephone (Telegraph Pole)
- 8) Baran Hall (BA), Temporary Baran Hall (TBH)
- 9) Mosque, Firdous, Tomb, Church, Temple, Graveyard
- 10) Market, Jhalakul, Place, Doodul, Baranoo & other Tree
- 11) Drain, Proposed Drain
- 12) Gas Line
- 13) Sewing CL, Prgline, Design CL, Prgline

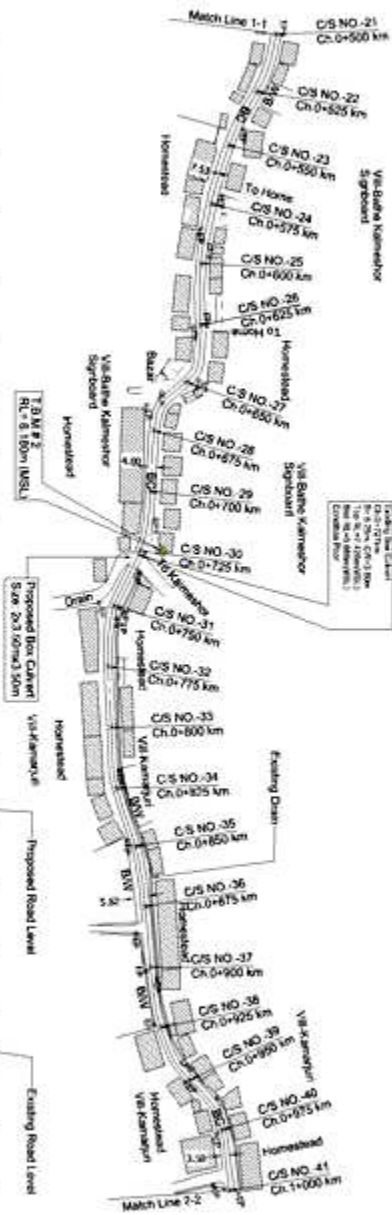

VERTICAL ALIGNMENT		EXISTING LEVEL (m)	PROPOSED PAVEMENT EXISTING L/S ANNUAL WORK M/S CHANNEL (m/s)
PROPOSED PAVEMENT EXISTING L/S ANNUAL WORK M/S CHANNEL (m/s)	EXISTING LEVEL (m)		
50.00	8.015	8.716	
49.00	8.005	8.606	
48.00	8.204	8.404	
47.00	8.036	8.739	
46.00	7.300	8.130	
45.00	7.777	7.807	
44.00	7.129	7.506	
43.00	7.063	7.865	
42.00	7.007	7.847	
41.00	7.443	7.403	
40.00	7.386	7.566	
39.00	7.427	7.822	
38.00	7.568	7.758	
37.00	7.560	7.609	
36.00	7.560	8.020	
35.00	7.776	7.976	
34.00	7.752	7.982	
33.00	7.627	7.627	
32.00	7.752	7.562	
31.00	7.772	7.972	
30.00	7.872	8.072	



- LEGEND**
- 1) Structure - Permanent, Semi-permanent, Trucked, Ltd.
 - 2) Main road, Road, R/C Road, Road with Road
 - 3) Road, Earthen Road, Footpath
 - 2) Bridge, Road, Culvert, Pipe, Culvert
 - Kanal, River, Ditch, Embankment
 - 4) Irry, Boundary, Irry, Wind, Trenching, Railway, Line
 - 5) Electric Pole (E.P.), Tower, Telegraph (Telegraph) Pole
 - 6) Buron (Bur), Temporary Road, Main (TRM)
 - 7) Wireless, Electric, Tonic, Circuit, Tempus, Grayward
 - 8) Wagon, Jockey, Path, Goods, Barrow & other Two
 - 9) Drain, Proposed Drain
 - 10) Canal, Line
 - 11) Existing O/L Pipeline, Design O/L Pipeline
-

Note :

All Heights are in Terms of MSL (Datum: Madras)
Highest Flood Level: 6.700m. (1980) Local Information
Normal Flood Level : 4.567m. Local Information
B.M. No-038. Carried from Top of R.C.C Pillar At Bangalore Open University
Board Bazar , Al-Vir: Kameshwar Board Bazar, Gadagpur,
B.M.03A. RL= 753m (MSL.)

01. T.B.M. #2 Keel on the NW Corner Plinth Level House of Mr. Manohar
Alwarmed, Al-Vir: Raja Kameshwar Board Bazar, Gadagpur. As Shown in the
Drawing. T.B.M. RL= 100m (MSL).

[illegible]

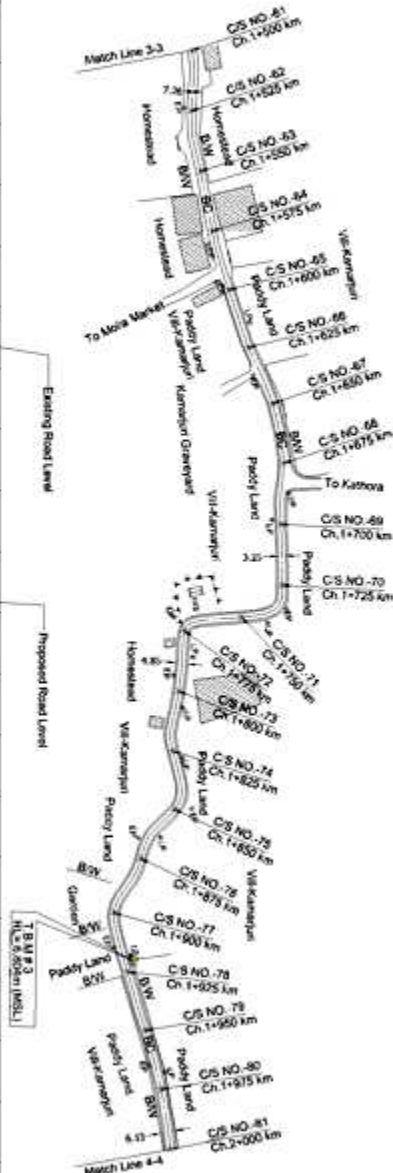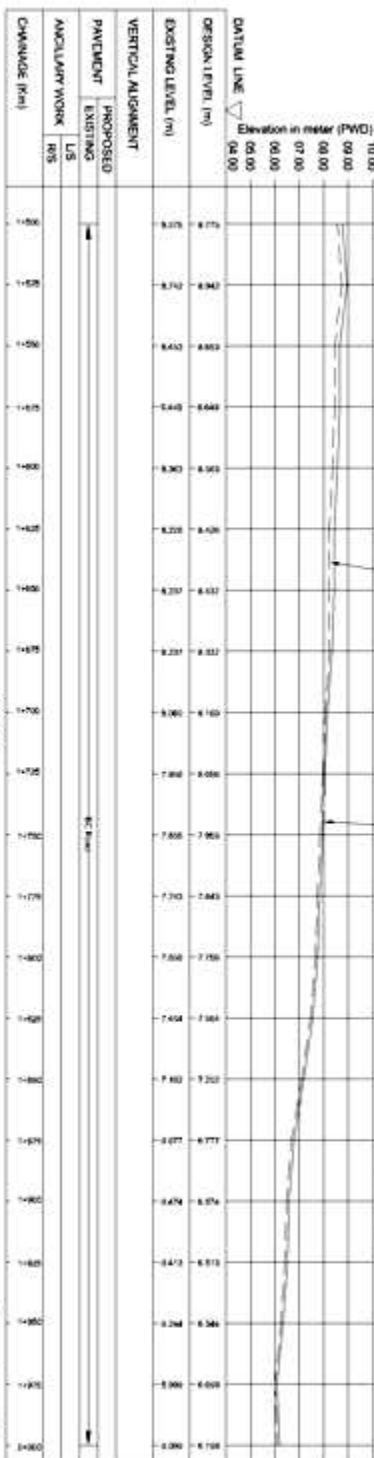

LEGEND:



- 1) Structures - Permanent, Semi-permanent, Temporary, H&H
- 2) Blomquist Road, HCC Road, 14th Road
- 3) 675 Road, Warren Road, Rockton
- 4) Bridge Box Culvert, Pipe Culvert
- 5) Main River, Ditch, Embankment
- 6) New Boundary Line, Wire Strung, Railway Line
- 7) Electric Pole (EP), Tower, Telephone/Triumph Pole
- 8) Power Lines (PL), Temporary Search Mark (TSM)
- 9) Blomquist, Earl Ginn, Local Church, Temple Grounds
- 10) Blomquist, Jacklyn, Plain, Coconut, Sandbar & Other Tree
- 11) Dam, Impounded Dam
- 12) Canal, Live
- 13) Existing CL, Profile, Design CL, Profile

At Heights are in Terms of NSL Datum (Mean)
Highest Flood Level: 7.00m (1998) Local Information
Normal Flood Level: 5.67m Local Information
B.M. No. 038: Cables from Top of R.C. C-Pillar At Bangladesh Open University,
Dhaka-1215. At Viji-Venkateswara, Shobad Bazar, Guwahati
B.M. 004, RL -9.750m (NSL)
D1: 1. B.M. # 3 Kept on the NE Corner of Boundary B.W. At Viji, Kamrupam,
Bardoloi Bazar, Guwahati. As Shown in the Drawing
B.M. RL -8.804m (NSL).

LOCAL GOVERNMENT ENGINEERING DEPARTMENT

[illegible]



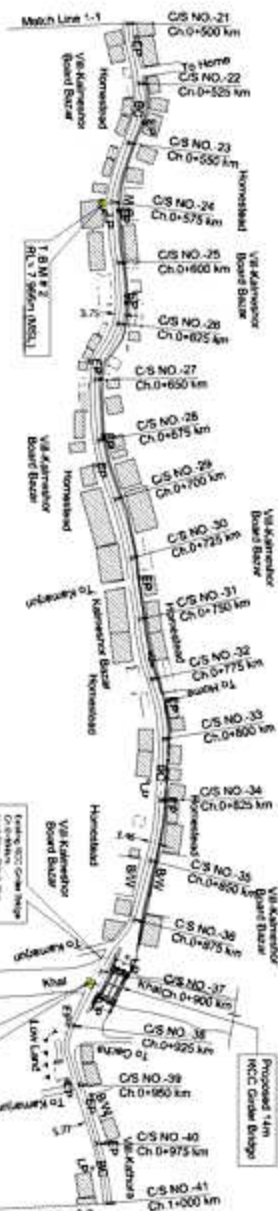



Al Hayslet are in Terms of MS, (Dahlan Shalei)
 Rept. Food Levels-700n (1998) Local Information
 Normal Food Level + 50% Time Information
 814 N-2000. Gravel from Top of U.C. River At Sanghabat Open University
 River River At Vya Khamphong, River River, (Gau) 100
 N-2000. 80-367m (MS)
 01 T.R.U. 80 kg on the 2nd Day of Star at Kalamphong Zame & Mawph, 80
 Ya Khamphong, River River, (Dahlan) At Shown in the Drawing
 T.R.U. 80 kg (1998) (MS)

02. T.B.M. # 3 Key on the NW Top End of Bridge at VSB-Markov. Exact
Bear, Change, As Shown in the Drawing.
T.B.M. #4 = 2.73m (9ft.0in.)

-

LOCAL GOVERNMENT ENGINEERING DEPARTMENT			
PSC	PACU		
POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS	POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS	POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS	POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS
<p>POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS</p> <p>POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS</p>	<p>POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS</p> <p>POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS</p>	<p>POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS</p> <p>POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS</p>	<p>POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS</p> <p>POSITIONS TO BE RECRUITED BY THE BOARD OF SUPERVISORS</p>

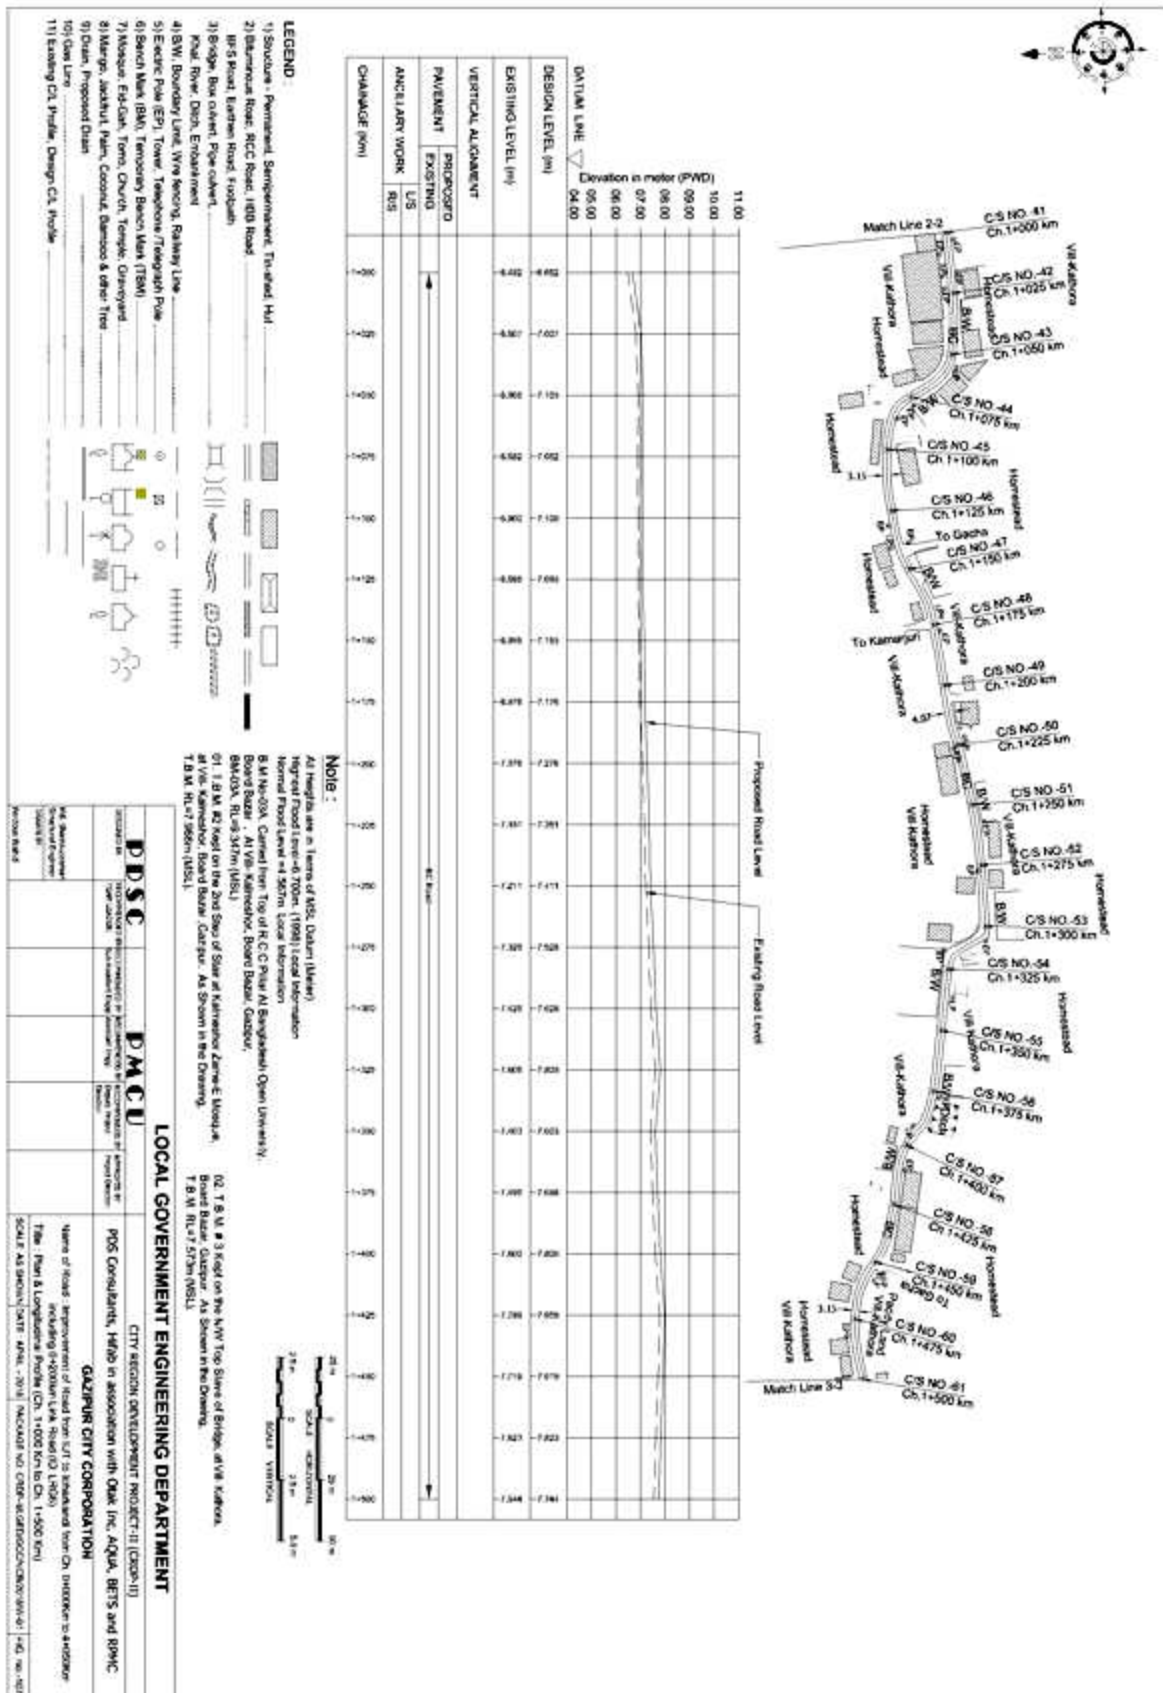

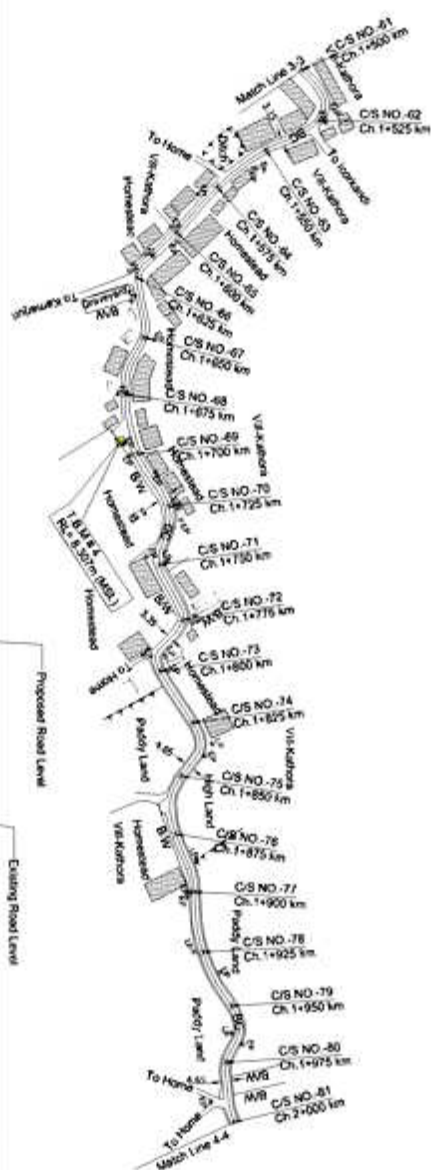

At heights in Terms of MSL, Diatom (Metry)
Height Fixed Layer=6700m, Local Information
Normal Flood level =4.587m, Local Information
B.M. No=044, Cited from Top of R.C. Pillar At Bangalore Open University
Board Data, At Villu, Kottur, Board Bazar, Goudpur,
Board Data, R-9-327m (MSL)
01. T.B.M. 4.4 Kept on the Mean gate of Choke Fisheries near TUL At Villu,
Kottur, Board Bazar, Goudpur. As Shown in the Drawing.
B.M. Ref. =307m (MSL).

At heights in Terms of MSL, Diatom (Metry)
Height Fixed Layer=6700m, Local Information
Normal Flood level =4.587m, Local Information
B.M. No=044, Cited from Top of R.C. Pillar At Bangalore Open University
Board Data, At Villu, Kottur, Board Bazar, Goudpur,
Board Data, R-9-327m (MSL)
01. T.B.M. 4.4 Kept on the Mean gate of Choke Fisheries near TUL At Villu,
Kottur, Board Bazar, Goudpur. As Shown in the Drawing.
B.M. Ref. =307m (MSL).

CITY REGION DEVELOPMENT PROJECT-11 (CARD-11)

CITY REGION DEVELOPMENT PROJECT-11 (CARD-11)

CLAZIBUD CITY CORPORATION

ALLIANCE CITY COOPERATION

— I am not planning to leave any more.


11) Existing OL Profile, Design OL Profile

and therefore
the value of
the function


112

Marine of Blood, approximately 100 miles from CA 0-100000 to 4-100000 including 0-200000 Link Road (CA 0-100000)

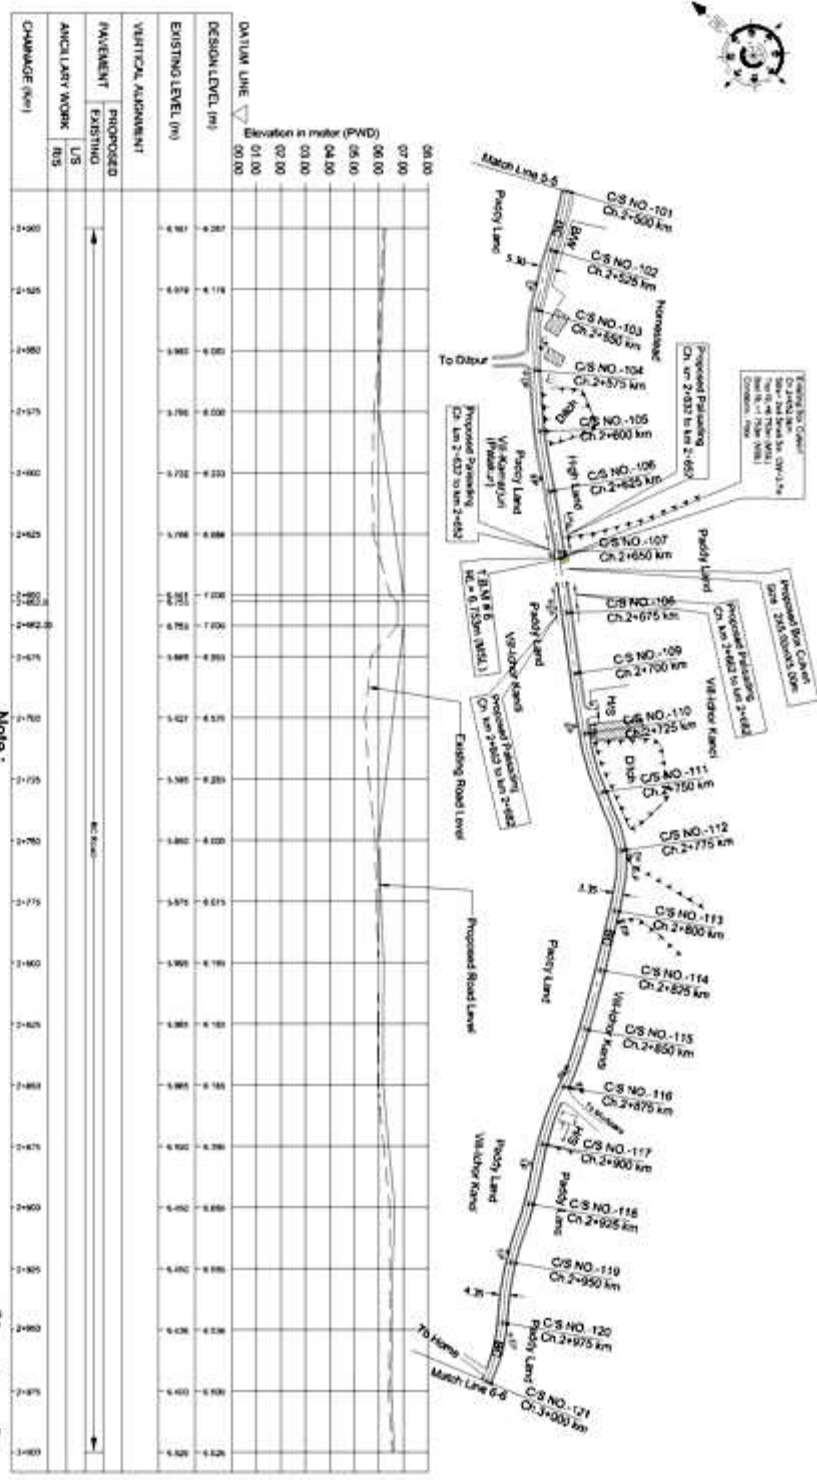


[illegible]

At Heights are in Terms of MSU, Darden (Nelson)
regional blood vessel, 700m (1960) Local information
National Flood Level at 667m.
B M N-40-04. Correl from Top of R.C.C Pillar at Birmingham Open University,
B M N-40-04. Correl from Top of R.C.C Pillar at Birmingham Open University,
BAI-02A, RL=9.347m (MSL).
01. T.B.M. #6 kept on the NE Corner Top Store of Bridge A/Via.
Kensington (Parker), Board Butler, Gaepp. As Shown in the Drawing:
T.B.M. RL=9.352m (MSL).



BSC		DMCU		CITY REGION DEVELOPMENT PROJECT-II (CDD-II)	
INDICATOR	GOVERNANCE INDICATORS TO BE MONITORED BY THE DISTRICT	GOVERNANCE INDICATORS TO BE MONITORED BY THE DISTRICT	GOVERNANCE INDICATORS TO BE MONITORED BY THE DISTRICT	GOVERNANCE INDICATORS TO BE MONITORED BY THE DISTRICT	GOVERNANCE INDICATORS TO BE MONITORED BY THE DISTRICT
1	1.1	1.1	1.1	1.1	1.1
2	2.1	2.1	2.1	2.1	2.1
3	3.1	3.1	3.1	3.1	3.1
4	4.1	4.1	4.1	4.1	4.1
5	5.1	5.1	5.1	5.1	5.1
6	6.1	6.1	6.1	6.1	6.1
7	7.1	7.1	7.1	7.1	7.1
8	8.1	8.1	8.1	8.1	8.1
9	9.1	9.1	9.1	9.1	9.1
10	10.1	10.1	10.1	10.1	10.1
11	11.1	11.1	11.1	11.1	11.1
12	12.1	12.1	12.1	12.1	12.1
13	13.1	13.1	13.1	13.1	13.1
14	14.1	14.1	14.1	14.1	14.1
15	15.1	15.1	15.1	15.1	15.1
16	16.1	16.1	16.1	16.1	16.1
17	17.1	17.1	17.1	17.1	17.1
18	18.1	18.1	18.1	18.1	18.1
19	19.1	19.1	19.1	19.1	19.1
20	20.1	20.1	20.1	20.1	20.1
21	21.1	21.1	21.1	21.1	21.1
22	22.1	22.1	22.1	22.1	22.1
23	23.1	23.1	23.1	23.1	23.1
24	24.1	24.1	24.1	24.1	24.1
25	25.1	25.1	25.1	25.1	25.1
26	26.1	26.1	26.1	26.1	26.1
27	27.1	27.1	27.1	27.1	27.1
28	28.1	28.1	28.1	28.1	28.1
29	29.1	29.1	29.1	29.1	29.1
30	30.1	30.1	30.1	30.1	30.1
31	31.1	31.1	31.1	31.1	31.1
32	32.1	32.1	32.1	32.1	32.1
33	33.1	33.1	33.1	33.1	33.1
34	34.1	34.1	34.1	34.1	34.1
35	35.1	35.1	35.1	35.1	35.1
36	36.1	36.1	36.1	36.1	36.1
37	37.1	37.1	37.1	37.1	37.1
38	38.1	38.1	38.1	38.1	38.1
39	39.1	39.1	39.1	39.1	39.1
40	40.1	40.1	40.1	40.1	40.1
41	41.1	41.1	41.1	41.1	41.1
42	42.1	42.1	42.1	42.1	42.1
43	43.1	43.1	43.1	43.1	43.1
44	44.1	44.1	44.1	44.1	44.1
45	45.1	45.1	45.1	45.1	45.1
46	46.1	46.1	46.1	46.1	46.1
47	47.1	47.1	47.1	47.1	47.1
48	48.1	48.1	48.1	48.1	48.1
49	49.1	49.1	49.1	49.1	49.1
50	50.1	50.1	50.1	50.1	50.1
51	51.1	51.1	51.1	51.1	51.1
52	52.1	52.1	52.1	52.1	52.1
53	53.1	53.1	53.1	53.1	53.1
54	54.1	54.1	54.1	54.1	54.1
55	55.1	55.1	55.1	55.1	55.1
56	56.1	56.1	56.1	56.1	56.1
57	57.1	57.1	57.1	57.1	57.1
58	58.1	58.1	58.1	58.1	58.1
59	59.1	59.1	59.1	59.1	59.1
60	60.1	60.1	60.1	60.1	60.1
61	61.1	61.1	61.1	61.1	61.1

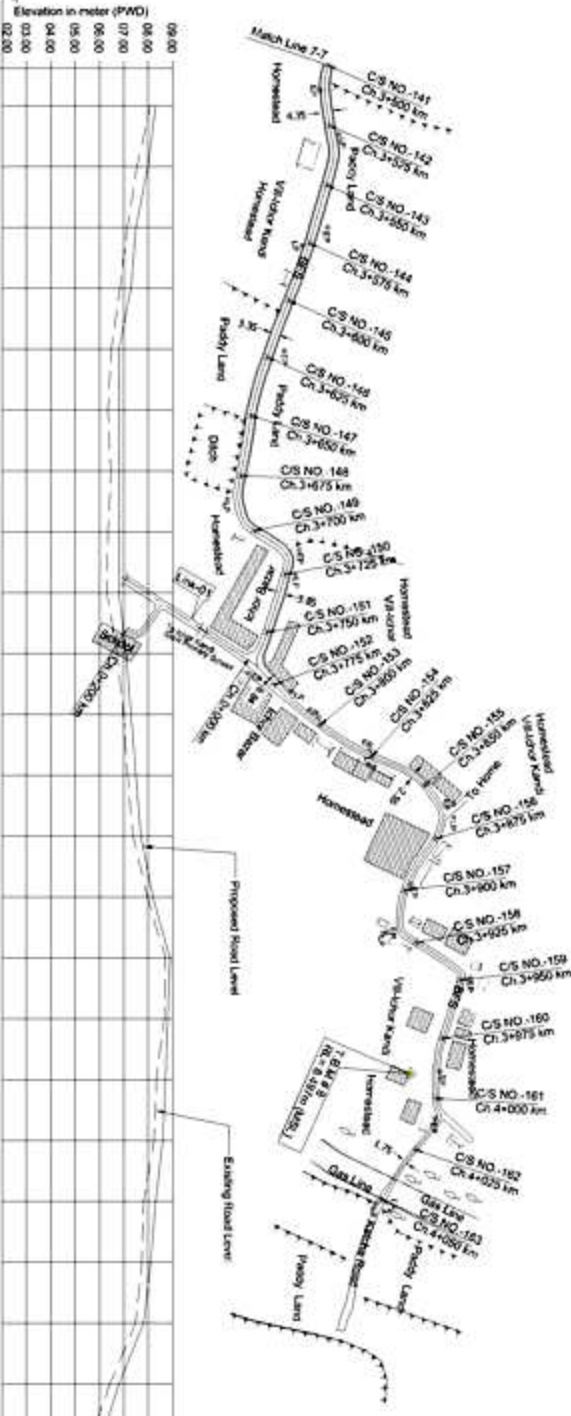





CHANGING (km)	PAVEMENT PROPOSED EXISTING L/S ADDITIONAL WORK P/S	VERTICAL ALIGNMENT	EXISTING LEVEL (m)	DESIGN LEVEL (m)	DATUM LINE ▽ Elevation in meter (PWD) 02.00 03.00 04.00 05.00 06.00 07.00 08.00 09.00
34500			8.386	8.330	
34540			7.941	8.000	
34580			7.146	7.100	
34620			8.021	7.300	
34660			8.588	8.800	
34700			8.341	8.800	
34740			8.001	8.800	
34780			8.361	8.800	
34820			8.362	8.800	
34860			8.724	7.100	
34900			8.878	7.300	
34940			7.959	7.400	
34980			7.981	7.700	
35020			7.981	8.200	
35060			8.323	8.800	
35100			8.963	8.800	
35140			8.338	8.700	
35180			8.237	8.800	
35220			7.805	8.300	
35260			7.737	8.100	
35300			7.478	7.800	
35340			8.001	8.800	
35380			8.521	8.800	


Note: 6m x 1.50m Scale

- LEGEND :**
- 1) Structure - Permanent, Semi-permanent, In-sited, etc.
 - 2) Damascus Road, RCC Road, 180 Road.
 - 3) Road, Earthen Road, Footpath
 - 4) Bridge, Bar, Culvert, Pipe, Culvert.
 - 5) Canal, River, Drain, Embankment
 - 6) BW, Boundary Line, Wire fencing, Railway Line
 - 7) Electric Pole (EP), Tower, Telephone (Telephone Pole)
 - 8) Barren Area (BA), Temporary Barren Area (TBA)
 - 9) Mosque, Fati-Che, Tomb, Church, Temple, Graveyard
 - 10) Market, Jadhakal, Plaza, Coconut, Bamboo & other Tree
 - 11) Drain, Proposed Drain
 - 12) Gas Line
 - 13) Electricity CL, Profile, Design CL, Profile

[illegible]

LOCAL GOVERNMENT ENGINEERING DEPARTMENT

																																																																																																														
--	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--	--	--

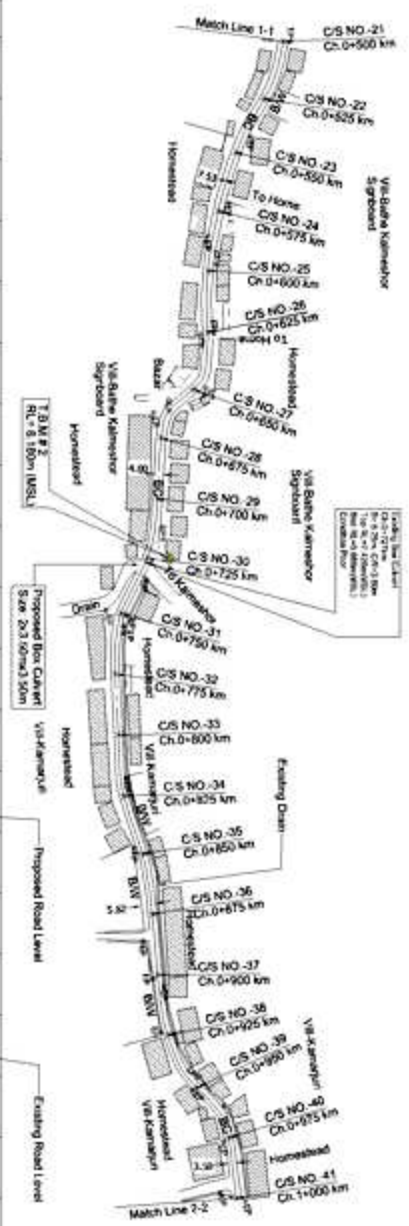

STATION	VERTICAL ALIGNMENT		EXISTING ELEV. (m)	DATUM LINE ▽ Elevation in meter (TWG)
	PROPOSED EXISTING	PROPOSED EXISTING		
0+00			8.015	8.015
0+25			8.005	8.005
0+50			8.304	8.304
0+75			8.008	8.239
0+100			7.903	8.130
0+125			7.777	7.807
0+150			7.728	7.808
0+175			7.803	7.805
0+200			7.817	7.847
0+225			7.943	7.903
0+250			7.388	7.569
0+275			7.422	7.620
0+300			7.508	7.708
0+325			7.560	7.809
0+350			7.580	8.020
0+375			7.778	8.378
0+400			7.752	7.882
0+425			7.627	7.627
0+450			7.752	7.980
0+475			7.772	7.972
0+500			7.872	8.072


A vertical scale bar labeled "SCALE: VERTICAL". It has markings at 0, 2.0 m, 4.0 m, 6.0 m, and 8.0 m.

- 1) Structure - Perimeter, Benchmark, Thrust, Hub
2) Numerous Road, R/C Road with Slabs
3) Road, Earth Road, Footpath
3) Bridge, Box culvert, Pipe culvert
Kodl River, Ditch, Embankment
4) R/W Boundary Line, Wire fencing, Railway Line
5) Electric Pole (EP), Tower, Telegraph, Pole
6) Bench Mark (BM), Temporary Bench Mark (TBM)
7) Mason, Electric, Tower, Church, Temple, Ganyard
8) Mango, Jachul, Palm, Coconut, Bamboo & other Tree
9) Drain, Proposed Drain
10) Gas Line
11) Existing O/L Profile, Design O/L Profile

Highest Flood Level = 3.00m. (1996). Local Information.
 Normal Flood Level = 1.567m. Local Information.
 B.M. No-038. Carried from Top of R.C.C Pillar At Bangladesh Open University,
 Board Bazar. At Viji Kamesther, Board Bazar, Gazipur.
 B.M. No-1. R/L = 7.52m (M.S.).
 01. T.M. # 2 Kept on the N.W Corner Pillar Level House of Mr. Monzila
 Ahmed, At Viji, Bala Kamesther, Board Bazar, Gazipur. At Shikonta
 Drawing. T.B.M. R/L = 10.0m (M.S.).

LOCAL GOVERNMENT ENGINEERING DEPARTMENT



[illegible]

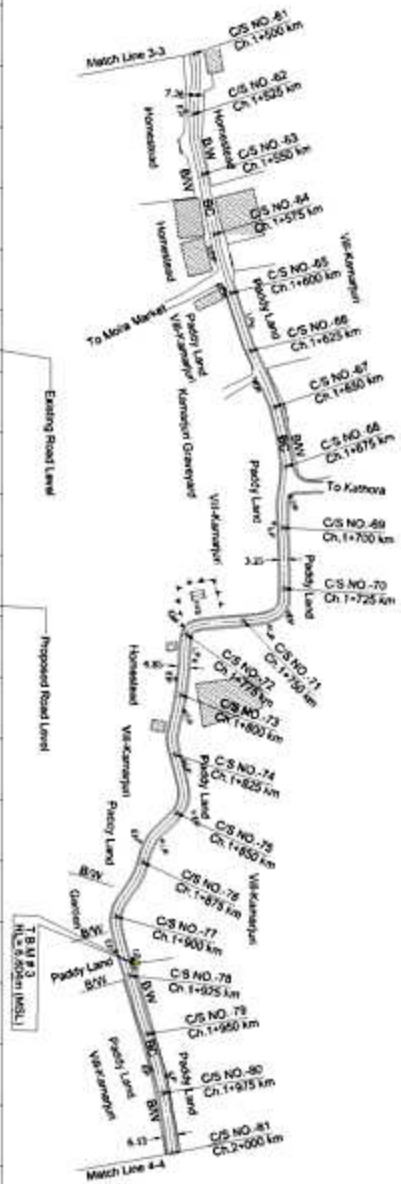

Air Heights are in Terms of MSL, Dairam (Meter)
Highest Flood Level: 700m (1998), Local Information
Normal Flood Level: ~657m, Local Information
B.M. No. 028: Carved from Top of R.C. Pillar At Bangsalah Open University,
Batu Tiga, Alor Gajah District, Daerah.
B.M. No. 029: 75cm (NSL).
T.B.M. #3 Kept on the NE Corner of Boundary B.W., Alor Yau, Kampong,
Boat Sakur Daizap, As Shown in the Drawing
B.M. RL-6-650m (MSL).

- | LOCAL GOVERNMENT | | | | |
|-------------------|------------------------|-----------------|-----------------|-----------------|
| PSC | | DMCU | | PDS C |
| OFFICER IN CHARGE | DEPUTY CHIEF OF POLICE | CHIEF OF POLICE | CHIEF OF POLICE | CHIEF OF POLICE |
| Mr. [Name] | Mr. [Name] | Mr. [Name] | Mr. [Name] | Mr. [Name] |

PSC		PACU		
OFFICER'S NAME	POSITION	OFFICER'S NAME	POSITION	
NAME	ADDRESS	NAME	ADDRESS	
Mr. Thompson	1234 Main St.	Mr. Thompson	1234 Main St.	
Mr. Johnson	5678 Oak Ave.	Mr. Johnson	5678 Oak Ave.	
Mr. Smith	9012 Pine Rd.	Mr. Smith	9012 Pine Rd.	
Mr. Brown	3456 Elm St.	Mr. Brown	3456 Elm St.	

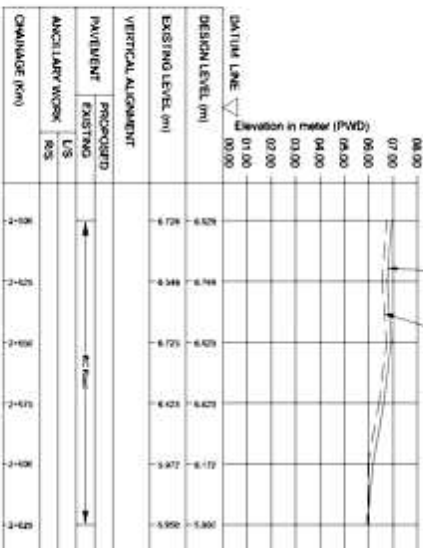


LEGEND :

- 1) Structure : Permanent, Semi-permanent, Trained H.A.
- 2) Boundary Road, RCC Road, HBB Road.
- 3) Road, but without Pipe culvert.
- 4) Bridge, but without Pipe culvert.
- 5) Road, but without Pipe culvert.
- 6) Boundary Road, RCC Road, HBB Road.
- 7) Boundary Road, RCC Road, HBB Road.
- 8) Boundary Road, RCC Road, HBB Road.
- 9) Boundary Road, RCC Road, HBB Road.
- 10) Boundary Road, RCC Road, HBB Road.
- 11) Boundary Road, RCC Road, HBB Road.

Note :

- 1) All heights are in Terms of MSL, Datum (Meter).
- 2) Highest Flood Level is 7.00m. (1988) Local Information.
- 3) Normal Flood Level is 4.50m. Local Information.
- 4) B.M. No. 02B : Carried from Top of R.C.C. Pillar at Bangladesh Open University, Board Bazar. At Vis. Karmahar, Board Bazar, Gazipur.
- 5) B.M. No. 02A, RL=7.50m (MSL).
- 6) T.B.M. #4 Kept on the SW Corner Main Gate of Boundary BW. At Vis. Karmahar (Patalur), Board Bazar, Gazipur. As Shown in the Drawing.
- 7) T.B.M. RL=7.00km (MSL).



LOCAL GOVERNMENT ENGINEERING DEPARTMENT

PROJECT NO.	PROJECT NAME	PROJECT LOCATION	PROJECT TYPE	PROJECT STATUS	PROJECT DATE
1	2	3	4	5	6
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36
37	38	39	40	41	42
43	44	45	46	47	48
49	50	51	52	53	54
55	56	57	58	59	60
61	62	63	64	65	66
67	68	69	70	71	72
73	74	75	76	77	78
79	80	81	82	83	84
85	86	87	88	89	90
91	92	93	94	95	96
97	98	99	100	101	102
103	104	105	106	107	108
109	110	111	112	113	114
115	116	117	118	119	120
121	122	123	124	125	126
127	128	129	130	131	132
133	134	135	136	137	138
139	140	141	142	143	144
145	146	147	148	149	150
151	152	153	154	155	156
157	158	159	160	161	162
163	164	165	166	167	168
169	170	171	172	173	174
175	176	177	178	179	180
181	182	183	184	185	186
187	188	189	190	191	192
193	194	195	196	197	198
199	200	201	202	203	204
205	206	207	208	209	210
211	212	213	214	215	216
217	218	219	220	221	222
223	224	225	226	227	228
229	230	231	232	233	234
235	236	237	238	239	240
241	242	243	244	245	246
247	248	249	250	251	252
253	254	255	256	257	258
259	260	261	262	263	264
265	266	267	268	269	270
271	272	273	274	275	276
277	278	279	280	281	282
283	284	285	286	287	288
289	290	291	292	293	294
295	296	297	298	299	300
301	302	303	304	305	306
307	308	309	310	311	312
313	314	315	316	317	318
319	320	321	322	323	324
325	326	327	328	329	330
331	332	333	334	335	336
337	338	339	340	341	342
343	344	345	346	347	348
349	350	351	352	353	354
355	356	357	358	359	360
361	362	363	364	365	366
367	368	369	370	371	372
373	374	375	376	377	378
379	380	381	382	383	384
385	386	387	388	389	390
391	392	393	394	395	396
397	398	399	400	401	402
403	404	405	406	407	408
409	410	411	412	413	414
415	416	417	418	419	420
421	422	423	424	425	426
427	428	429	430	431	432
433	434	435	436	437	438
439	440	441	442	443	444
445	446	447	448	449	450
451	452	453	454	455	456
457	458	459	460	461	462
463	464	465	466	467	468
469	470	471	472	473	474
475	476	477	478	479	480
481	482	483	484	485	486
487	488	489	490	491	492
493	494	495	496	497	498
499	500	501	502	503	504
505	506	507	508	509	510
511	512	513	514	515	516
517	518	519	520	521	522
523	524	525	526	527	528
529	530	531	532	533	534
535	536	537	538	539	540
541	542	543	544	545	546
547	548	549	550	551	552
553	554	555	556	557	558
559	560	561	562	563	564
565	566	567	568	569	570
571	572	573	574	575	576
577	578	579	580	581	582
583	584	585	586	587	588
589	590	591	592	593	594
595	596	597	598	599	600
601	602	603	604	605	606
607	608	609	610	611	612
613	614	615	616	617	618
619	620	621	622	623	624
625	626	627	628	629	630
631	632	633	634	635	636
637	638	639	640	641	642
643	644	645	646	647	648
649	650	651	652	653	654
655	656	657	658	659	660
661	662	663	664	665	666
667	668	669	670	671	672
673	674	675	676	677	678
679	680	681	682	683	684
685	686	687	688	689	690
691	692	693	694	695	696
697	698	699	700	701	702
703	704	705	706	707	708
709	710	711	712	713	714
715	716	717	718	719	720
721	722	723	724	725	726
727	728	729	730	731	732
733	734	735	736	737	738
739	740	741	742	743	744
745	746	747	748	749	750
751	752	753	754	755	756
757	758	759	760	761	762
763	764	765	766	767	768
769	770	771	772	773	774
775	776	777	778	779	780
781	782	783	784	785	786
787	788	789	790	791	792
793	794	795	796	797	798
799	800	801	802	803	804
805	806	807	808	809	810
811	812	813	814	815	816
817	818	819	820	821	822
823	824	825	826	827	828
829	830	831	832	833	834
835	836	837	838	839	840
841	842	843	844	845	846
847	848	849	850	851	852
853	854	855	856	857	858
859	860	861	862	863	864
865	866	867	868	869	870
871	872	873	874	875	876
877	878	879	880	881	882
883	884	885	886	887	888
889	890	891	892	893	894
895	896	897	898	899	900
901	902	903	904	905	906
907	908	909	910	911	912
913	914	915	916	917	918
919	920	921	922	923	924
925	926	927	928	929	930
931	932	933	934	935	936
937	938	939	940	941	942
943	944	945	946	947	948
949	950	951	952	953	954
955	956	957	958	959	960
961	962	963	964	965	966
967	968	969	970	971	972
973	974	975	976	977	978
979	980	981	982	983	984
985	986	987	988	989	990
991	992	993	994	995	996
997	998	999	1000	1001	1002

Appendix 6: Sample Spoil Management Plan

Purpose and application: Spoil Management Plan (SMP) is to describe how Second CRDP will manage the spoil generated and reuse related to design and construction works. This is an integral part of EMP. The objective of SMP is to reuse of spoil from works in accordance with the spoil management hierarchy outlined in this document.

Objectives of SMP: The objectives of SMP are:

- (i) To minimize spoil generation where possible
- (ii) Maximize beneficial reuse of spoil from construction works in accordance with spoil management hierarchy
- (iii) Manage onsite spoil handling to minimize environmental impacts on resident and other receivers
- (iv) Minimize any further site contamination of land, water, soil
- (v) Manage the transportation of spoil with consideration of traffic impacts and transport related emissions

Structure of SMP:

Section1: Introduction of SMP

Section2: Legal and other requirements

Section3: Roles and responsibilities

Section4: Identification and assessment of spoil aspects and impacts

Section5: Spoil volumes, characteristics and minimization

Section6: Spoil reuses opportunities, identification and assessment

Section7: Onsite spoil management approach

Section8: Spoil transportation methodology

Section9: Monitoring, Reporting, Review, and Improvements

Aspects and potential impacts

The key aspects of potential impacts in relation to SMP are listed in table below

Aspects	Potential Impacts
Air Quality	Potential for high winds generating air borne dust from the stockpiles
Sedimentation	Potential for sediment laden site runoff from spoil stockpiles and potential for spillage of spoil from truck on roads
Surface and groundwater	Contamination of surface and ground water
Noise	Associated with spoil handling and haulage and storage
Traffic	Impacts associated with spoil haulage
Land Use	Potential for spoil to be transported to a that does not have permission for storage/disposal
Design specifications	Limitations on opportunities to minimize spoil generation
Sustainability	Limited sites for storage, reuse opportunities

Spoil volumes, Characteristics and Minimization

Spoil volume calculations: Estimate the volumes of spoils produced from each of the construction sites.

Characterization of spoil: Based on the type of spoil; characterization is done (sandstone, mud-mix materials, reusable materials)

Adopt Spoil Reduce, Reuse Opportunities: An overview of the assessment methodology to be used is mentioned below.

- Consideration of likely spoil characteristics
- Identification of possible reuse sites
- Screening of possible reuse opportunities

Identification of possible safe disposal sites for spoil: Those spoils which can't be reused shall be properly disposed in designated areas, such disposal areas should be identified in project locations. Such disposal areas should be safe from environmental aspects and there should be any legal and resettlement related issues. Such areas need to be identified and prior client approval should be obtained to use it as spoil disposal area. The local administration must be consulted and if required permission should be obtained from them.


Storage and stockpiling Transportation and haulage route

Based on the above, the contractor will prepare a SMP as an integral part of EMP and submit to the PDSC for their review and approval.

Summary of Key Issues and Remedial Actions

Summary of follow-up time-bound actions to be taken within a set time frame.

Appendix 7: LGED Tree Plantation Program Manual (Cover Page and Table of Contents)
Note: Copy of the full manual is available upon request at the PMCU Office

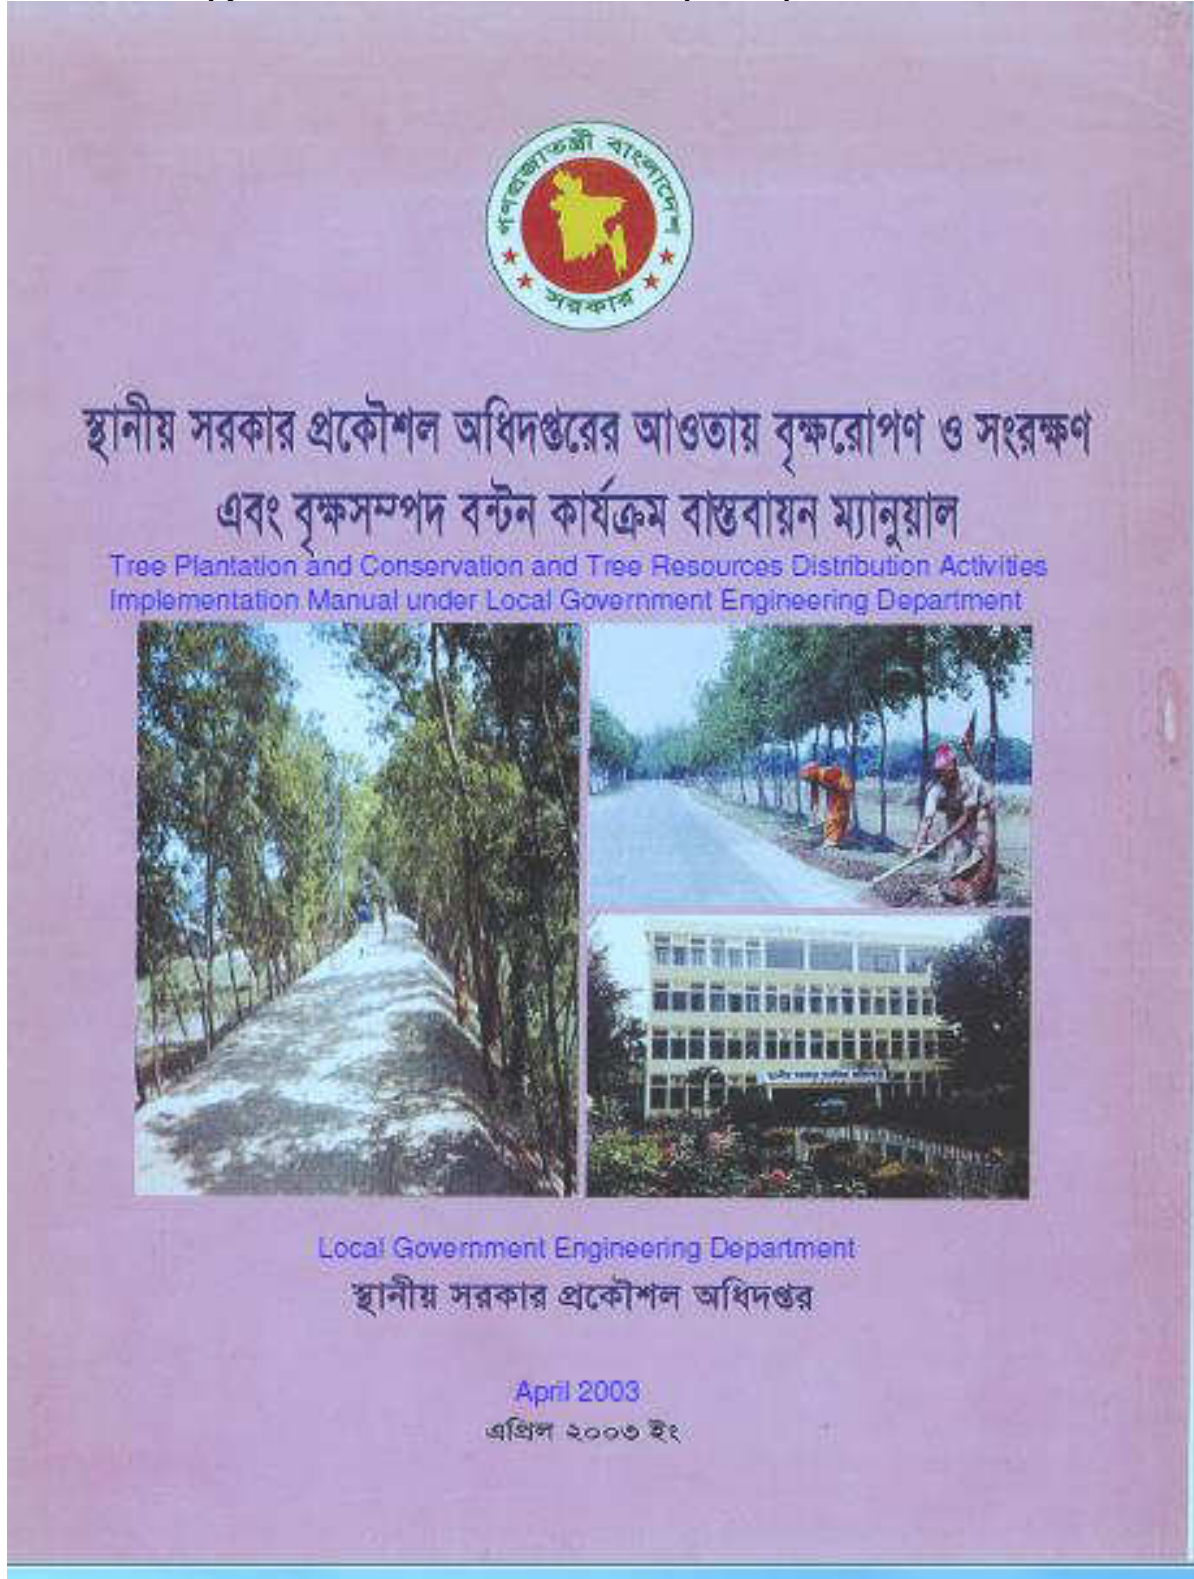

***Tree Plantation and Conservation and Tree Resources Distribution
Activities Implementation Manual
under
Local Government Engineering Department***

Table of Contents

- 1. Tree Plantation and Conservation in the LGED's Premises and Fallow Land**
 - 1.1 Availability of Land**
 - 1.2 Estimate Preparation of Schemes**
 - 1.3 Implementation**
 - 1.4 Tree Resources Distribution**
 - 1.5 Financing**
 - 1.6 Implementing Office and Designated Officer**
 - 1.7 Responsibility of the Implementing Office's Designated Officer**
- 2. Roadside Tree Plantation and Conservation**
 - 2.1 Road Maintenance**
 - 2.2 Tree Plantation and Caring**
 - 2.3 Road Maintenance , Tree Plantation and Conservation Activities Implementation**
 - 2.3.1 Road Maintenance, Tree Plantation and Conservation Scheme Identification, Scheme Preparation, Approval, Financing and Implementation Process**
 - 2.3.2 Implementation adopting Lenthperson Process by Organized Women Group**
 - 2.3.3 Worker Selection**
 - 2.3.4 Worker Selection Policy**
 - 2.3.5 Formation of the Interview Board**
 - 2.3.6 Campaign**
 - 2.3.7 Interviewing and Selection**
 - 2.3.8 Team Formation**
 - 2.3.9 Responsibility of Women Worker**
 - 2.3.10 Responsibility of Co- women group Leader**
 - 2.3.11 Responsibility of Women group Leader**
 - 2.3.12 Recruitment of Supervisor**
 - 2.3.13 Provide Appointment Letters**
 - 2.3.14 Provide Equipments among Worker Women for Maintenance Work**
 - 2.3.15 Initiation of Implementation of Scheme**
 - 2.4 Training**
 - 2.4.1 General Awareness Training for Women Workers on Road Maintenance, Plantation and Conservation**
 - 2.4.2 General Awareness Training for Women Workers on Primary Health Care and Income-generating Activities**
 - 2.5 Inspection and Monitoring**
 - 2.5.1 Inspection and Monitoring System of Road Maintenance, Plantation and Conservation Program**

- 2.6 Wage
 - 2.6.1 Wage Fixation
 - 2.6.2 Bank Account
 - 2.6.3 Wage Payment
 - 2.6.4 Compulsory Savings
- 2.7 Distribution of Income from Trees
 - 2.7.1 Tree Resources Distribution System
 - 2.7.2 Template: Tree Resources Distribution
 - 2.7.3 Contract signed for Distribution of Tree Resources among different parties according to the Adopted Policy
 - 2.7.4 Monitoring the Implementation of the Contract
- 2.8 Financing
 - 2.8.1 Source of Funding for the Program
 - 2.8.2 Financing Process
- 2.9 Description of Responsibility of Representatives of Local Government Organizations and of LGED Officials in the Implementation of Road Maintenance (off-pavement), Plantation and Conservation Program
 - 2.9.1 Responsibility of Union Parishad (UP)
 - 2.9.2 Responsibility of UP Male/Female Member
 - 2.9.3 Responsibility of UP Chairman
 - 2.9.4 Responsibility of Upazila Parishad
 - 2.9.5 Responsibility of Upazila Executive/Nirbahi Officer (UNO)
 - 2.9.6 Responsibility of LGED's Community Organizer (CO)
 - 2.9.7 Responsibility of Sub-Assistant Engineer
 - 2.9.8 Responsibility of Upazila Engineer (UE)
 - 2.9.9 Responsibility of LGED's Executive Engineer (Training)
 - 2.9.10 Responsibility of LGED's District Executive Engineer
- 3. Tree Plantation at Embankment and Canal Bank and their Conservation
 - 3.1 Selection of Proposals for Tree Plantation and Conservation Embankment Slope and Canal Bank 61
 - 3.2 Implementation
 - 3.3 Selection of Tree Species
 - 3.3.1 Tree planting Distance
 - 3.3.2 Tree Sapling Planting Method
 - 3.3.3 Tree Caring and Prohibition
 - 3.3.4 Inspection and Monitoring
 - 3.4 Wages
 - 3.5 Financing
 - 3.6 Implementing Agency
 - 3.7 Tree Resources Distribution
 - 3.8 Distribution of Money from Sale of Trees Grown at Embankment Slope and Canal Bank

Annexures

A) Road

Road/Annex – 1:	Tree Species Selection, Tree Plantation and Caution in
Road/Annex – 2:	Method of Tree Sapling Plantation
Road/Annex – 3:	Points Value for Priority Ranking
Road/Annex – 4:	Technical Report
Road/Annex – 5:	Format for Cost Estimate
Road/Annex – 6:	Appointment Letter of Women Worker
Road/Annex – 6a:	Appointment Letter of Supervisor
Road/Annex – 7:	Women Worker's acceptance Letter for Working Tools for Road Maintenance, Tree Plantation and Conservation Scheme
Road/Annex – 8:	Regular Road Maintenance and Tree Care Monitoring Register
Road/Annex – 8a:	Work Code and Description
Road/Annex – 8b:	Daily Activity Report of Regular Maintenance Work done by Women Worker
Road/Annex – 9:	Monthly Monitoring of Regular Road Maintenance and Tree Care
Road/Annex – 10:	Monthly Monitoring Summary Report
Road/Annex – 11:	Tree Resources Distribution Agreement

B) Embankment

Embankment/Annex- 1:	Proposal of Plantation at Embankment Slope and Canal Bank
Embankment/Annex- 2:	Schedule 1
Embankment/Annex- 3:	Executable at a Non-Judicial Stamp of Value of Taka 150.00
Embankment/Annex- 4:	Contractor's Responsibility and Condition of Recruitment
Embankment/Annex- 5:	Sample – Method of Tree Plantation at Embankment Slope
Embankment/Annex- 6:	Template of Monthly Proress Report



স্থানীয় সরকার প্রকৌশল অধিদপ্তরের আওতায় বৃক্ষরোপণ ও সংরক্ষণ
এবং বৃক্ষসম্পদ বন্টন কার্যক্রম বাস্তবায়ন ম্যানুয়াল

Tree Plantation and Conservation and Tree Resources Distribution Activities
Implementation Manual under Local Government Engineering Department



Local Government Engineering Department

স্থানীয় সরকার প্রকৌশল অধিদপ্তর

April 2003

এপ্রিল ২০০৩ ইং

***Tree Plantation and Conservation and Tree Resources Distribution
Activities Implementation Manual
under
Local Government Engineering Department***

Table of Contents

- 1. Tree Plantation and Conservation in the LGED's Premises and Fallow Land**
 - 1.1 Availability of Land**
 - 1.2 Estimate Preparation of Schemes**
 - 1.3 Implementation**
 - 1.4 Tree Resources Distribution**
 - 1.5 Financing**
 - 1.6 Implementing Office and Designated Officer**
 - 1.7 Responsibility of the Implementing Office's Designated Officer**
- 2. Roadside Tree Plantation and Conservation**
 - 2.1 Road Maintenance**
 - 2.2 Tree Plantation and Caring**
 - 2.3 Road Maintenance , Tree Plantation and Conservation Activities Implementation**
 - 2.3.1 Road Maintenance, Tree Plantation and Conservation Scheme Identification, Scheme Preparation, Approval, Financing and Implementation Process**
 - 2.3.2 Implementation adopting Lenthperson Process by Organized Women Group**
 - 2.3.3 Worker Selection**
 - 2.3.4 Worker Selection Policy**
 - 2.3.5 Formation of the Interview Board**
 - 2.3.6 Campaign**
 - 2.3.7 Interviewing and Selection**
 - 2.3.8 Team Formation**
 - 2.3.9 Responsibility of Women Worker**
 - 2.3.10 Responsibility of Co- women group Leader**
 - 2.3.11 Responsibility of Women group Leader**
 - 2.3.12 Recruitment of Supervisor**
 - 2.3.13 Provide Appointment Letters**
 - 2.3.14 Provide Equipments among Worker Women for Maintenance Work**
 - 2.3.15 Initiation of Implementation of Scheme**
 - 2.4 Training**
 - 2.4.1 General Awareness Training for Women Workers on Road Maintenance, Plantation and Conservation**
 - 2.4.2 General Awareness Training for Women Workers on Primary Health Care and Income-generating Activities**
 - 2.5 Inspection and Monitoring**
 - 2.5.1 Inspection and Monitoring System of Road Maintenance, Plantation and Conservation Program**

- 2.6 Wage
 - 2.6.1 Wage Fixation
 - 2.6.2 Bank Account
 - 2.6.3 Wage Payment
 - 2.6.4 Compulsory Savings
- 2.7 Distribution of Income from Trees
 - 2.7.1 Tree Resources Distribution System
 - 2.7.2 Template: Tree Resources Distribution
 - 2.7.3 Contract signed for Distribution of Tree Resources among different parties according to the Adopted Policy
 - 2.7.4 Monitoring the Implementation of the Contract
- 2.8 Financing
 - 2.8.1 Source of Funding for the Program
 - 2.8.2 Financing Process
- 2.9 Description of Responsibility of Representatives of Local Government Organizations and of LGED Officials in the Implementation of Road Maintenance (off-pavement), Plantation and Conservation Program
 - 2.9.1 Responsibility of Union Parishad (UP)
 - 2.9.2 Responsibility of UP Male/Female Member
 - 2.9.3 Responsibility of UP Chairman
 - 2.9.4 Responsibility of Upazila Parishad
 - 2.9.5 Responsibility of Upazila Executive/Nirbahi Officer (UNO)
 - 2.9.6 Responsibility of LGED's Community Organizer (CO)
 - 2.9.7 Responsibility of Sub-Assistant Engineer
 - 2.9.8 Responsibility of Upazila Engineer (UE)
 - 2.9.9 Responsibility of LGED's Executive Engineer (Training)
 - 2.9.10 Responsibility of LGED's District Executive Engineer
- 3. Tree Plantation at Embankment and Canal Bank and their Conservation
 - 3.1 Selection of Proposals for Tree Plantation and Conservation Embankment Slope and Canal Bank
 - 3.2 Implementation
 - 3.3 Selection of Tree Species
 - 3.3.1 Tree planting Distance
 - 3.3.2 Tree Sapling Planting Method
 - 3.3.3 Tree Caring and Prohibition
 - 3.3.4 Inspection and Monitoring
 - 3.4 Wages
 - 3.5 Financing
 - 3.6 Implementing Agency
 - 3.7 Tree Resources Distribution
 - 3.8 Distribution of Money from Sale of Trees Grown at Embankment Slope and Canal Bank

61

Annexures


A) Road

Road/Annex – 1:	Tree Species Selection, Tree Plantation and Caution in
Road/Annex – 2:	Method of Tree Sapling Plantation
Road/Annex – 3:	Points Value for Priority Ranking
Road/Annex – 4:	Technical Report
Road/Annex – 5:	Format for Cost Estimate
Road/Annex – 6:	Appointment Letter of Women Worker
Road/Annex – 6a:	Appointment Letter of Supervisor
Road/Annex – 7:	Women Worker's acceptance Letter for Working Tools for Road Maintenance, Tree Plantation and Conservation Scheme
Road/Annex – 8:	Regular Road Maintenance and Tree Care Monitoring Register
Road/Annex – 8a:	Work Code and Description
Road/Annex – 8b:	Daily Activity Report of Regular Maintenance Work done by Women Worker
Road/Annex – 9:	Monthly Monitoring of Regular Road Maintenance and Tree Care
Road/Annex – 10:	Monthly Monitoring Summary Report
Road/Annex – 11:	Tree Resources Distribution Agreement

B) Embankment


Embankment/Annex- 1:	Proposal of Plantation at Embankment Slope and Canal Bank
Embankment/Annex- 2:	Schedule 1
Embankment/Annex- 3:	Executable at a Non-Judicial Stamp of Value of Taka 150.00
Embankment/Annex- 4:	Contractor's Responsibility and Condition of Recruitment
Embankment/Annex- 5:	Sample – Method of Tree Plantation at Embankment Slope
Embankment/Annex- 6:	Template of Monthly Proress Report

Appendix 8: Strip Maps Showing PCRs (Religious Establishments) Along the Road Alignments

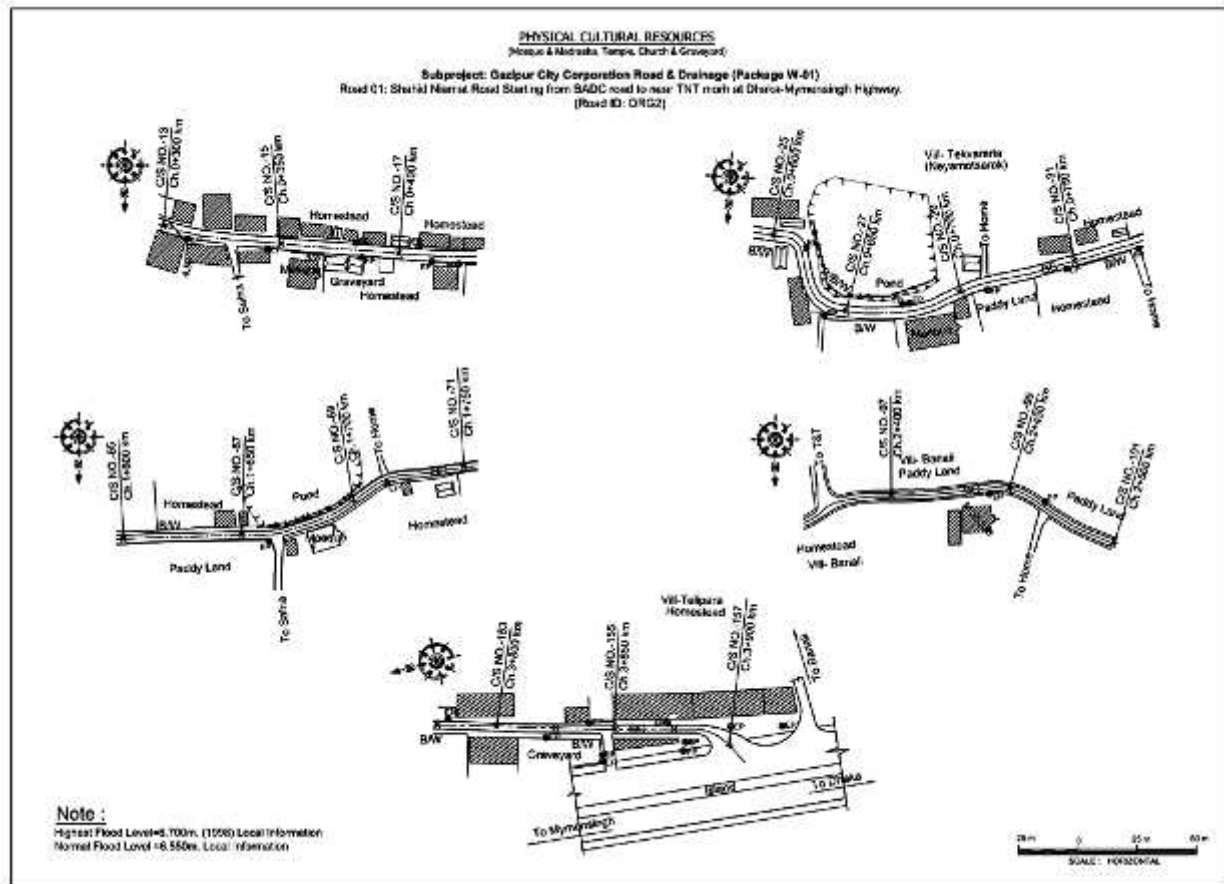

(Vogue & Madrasa, Temple, Church & Graveyard)


Road 02: Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morn (Road ID: LRG4).



PHYSICAL CULTURAL RESOURCES

(Mosque & Masjid, A, Temple, Church & Graveyard)

Subproject: Gazipur City Corporation Road & Drainage (Package W-01)
Road C/S: BUT to Ishwardi & S grnboard to Kamsanjuri Road. (ID: LR06)

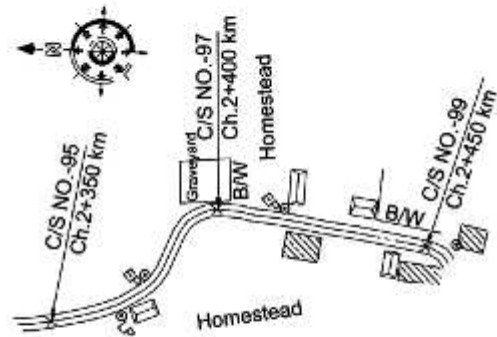


Note :

Highest Flood Level=6.700m. (1998) Local Information
Normal Flood Level =4.967m. Local Information




PHYSICAL CULTURAL RESOURCES
(Mosque & Madrasa, Tombs, Church & Graveyard)

Subproject: Gazipur City Corporation Road & Drainage (Package W-01)
Road 01: Sherid Nararat Road Starting from SADC road to near TNT north at Dhaka-Mymensingh Highway.
(Road ID: DRG2)

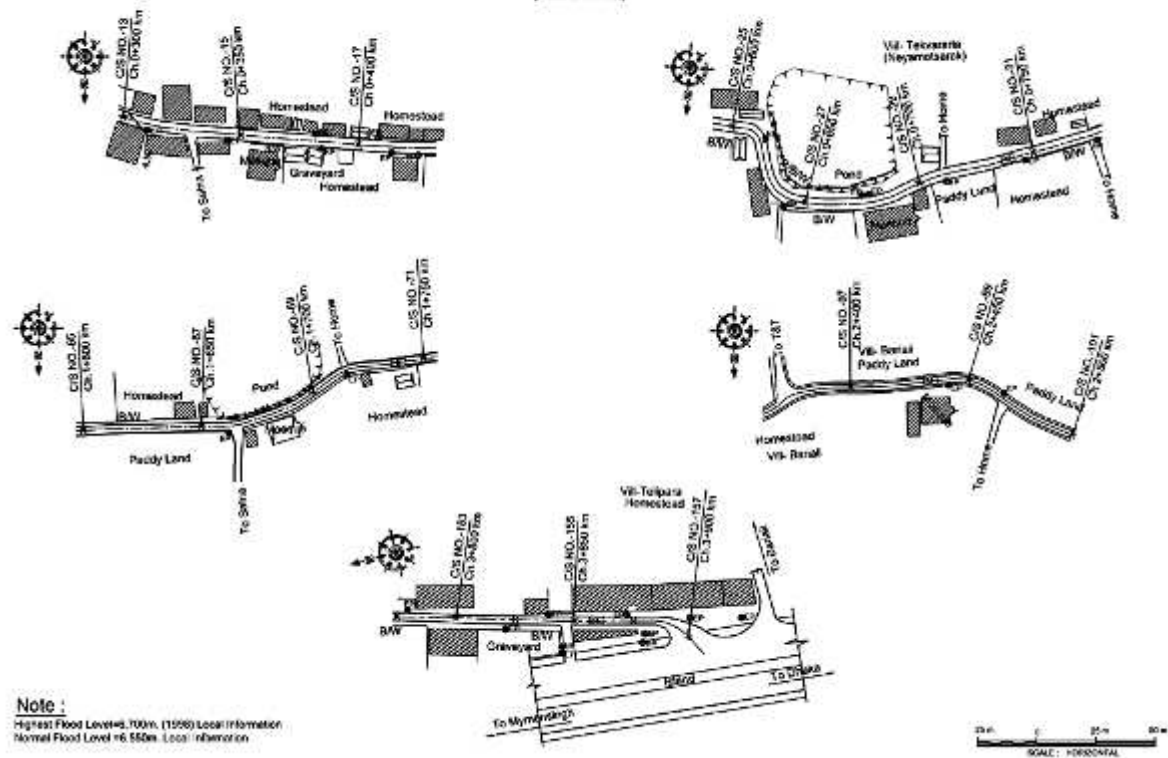

(Nogue & Madrasa, Temple, Church & Graveyard)

Road 02: Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morth (Road ID: LRG4).



PHYSICAL CULTURAL RESOURCES

(Mosque & Madrasa, Temple, Church & Graveyard)

Subproject: Gaspar City Corporation Road & Drainage (Package W-01)
Road 03: IUT to Ichankandi & Sgribard to Kananjuri Road. (ID: LINC6)



Note :
Highest Flood Level=6.700 m. (1988) Local Information
Normal Flood Level =4.967m. Local Information

25 m 0 25 m 50 m
SCALE : HORIZONTAL

Appendix 9: Public Consultation

Details of date, time, location, type of participants and discussed issues are presented in a tabular form below:

Sl. No	Date of Consultation	Road & Place of consultation	Number & Type of Participants	Issues Discussed
01	11.12. 17	For a) Shahid Niamat Road (Road ID ORG-2) - at roadside Councilor office	15 (Councilors, Retired Govt. Officials, Local Elite, Businessmen, project beneficiaries etc.)	<p>General perception about the project and the awareness about the proposed project are disseminated in the meeting. The following pre-defined issues are discussed in the consultation meetings:</p> <ul style="list-style-type: none"> • Information dissemination about the subproject • possible impacts of the subproject • participation of local people in different project activities • Employment potential for local people in the project works • Loss of residential/commercial structures, if any due to the project • Resettlement and land acquisition (if foreseen specially on private land). • Impact on social issues due to the project • Protected areas (national park, protected forest, religiously sensitive sites, historical or archaeological sites), if any • Any critical issue or concern by the local people regarding the project • Grievances redress mechanism etc.

02.	11.12.17	b) Ambagh Municipal road. Road (Road ID ORG-2) - at roadside school	18 (Councilors, Retired Govt. Officials, Local Elite, Businessmen, project beneficiaries etc.)	•
03	12.12.17	c) IUT Icharkandi road and signboard to Kamarjuri road (Road ID ORG- 2) at Roadside bazar	20(Councilors, Businessmen, Local Elites, Beneficiaries Service holders etc.)	

Finding in the public consultation meeting

- Local people will support the project activities.
- The main issue arising from the consultation is that the people of this area suffering huge traffic congestion due to movement of heavy container truck. They cannot easily move to the school, hospital, and their working place from their due to congestion. . Peoples will be benefitted who are residing alongside the road of area if the project will undertake..
- The area is dominating business area about 70% are depends on business and the rest service and cultivations.
- During construction period short term community activities will be affected.
- No resettlement and land acquisition required for due to the project, only compensation need for the unauthorized shop and residence.
- There is no protected area in and around the project area.

- The project will never impact on natural water body and not contaminate the soil resources.
- The NGOs within the areas are: ASA, BRAC, Grameen Bank, Karitas, MSS, ODC, UPPR, JIZ, Gonosasto, etc.
- It assured by the participant, that they will welcome the project, and will support/cooperate in all stages of the project works.

LIST OF PARTICIPANTS

GCC
ORU-21

Shahid Niamat road starting from BADE to
near TDT mark at - Dhaka Ulganesh RD

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	এমদা হুসন	ড্রাইভার	এমদা হুসন
২।	মোঃ আফজাদ (কাথোরা)	হাস	আফজাদ
৩।	মোঃ সাকিব (কাথোরা)	চাফ	সাকিব
৪।	মোঃ রাকিব	কমিসারী	রাকিব
৫।	মাদাম হোসেন (কাথোরা)	গ্রন্থ	হোসেন
৬।	মোঃ কিকির (কাথোরা)	ব্রহ্ম	কিকির
৭।	মোঃ সাফিউল ইসলাম	ব্রহ্ম	সাফিউল
৮।	আব্বাস হোসেন	হাস	আব্বাস
৯।	আব্দুল্লাহ আলী	ব্রহ্ম	আব্বাস
১০।	মোঃ নবীন হোসেন	ব্রহ্ম	নবীন


02

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	অনজিতা	ছাত্রী	অনজিতা
২।	হোসনা কাকুলী	গ্যাজেট	কাকুলী
৩।	হোসনা: আলী আকতার	গ্যাজেট	গ্যাজেট
৪।	হোসনা: কুহলী	ছাত্রী	হোসনা: কুহলী
৫।	মাহিমা	ছাত্রী	মাহিমা
৬।			
৭।			
৮।			
৯।			
১০।			

Ambagh Municipal Road

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	মোঃ হান্নানুল হক	কোডিং-১০	 ১২/১২/১৭
২।	মোঃ আবদুল হান্নান	গৃহস্থালী	মোঃ আবদুল হান্নান
৩।	মোঃ সিরাজুল ইসলাম	মোঃ হান্নানুল হক	বিলুটি
৪।	মোঃ মিলন হোসেন	হান্নান	মিলন
৫।	মোঃ মোঃ হান্নানুল হক	হান্নানুল হক	হান্নানুল হক ১২/১২/১৭
৬।	মোঃ হান্নানুল হক	হান্নানুল হক	হান্নান
৭।	মোঃ হান্নানুল হক	হান্নানুল হক	হান্নানুল হক
৮।	মোঃ হান্নানুল হক	হান্নানুল হক	হান্নানুল হক
৯।	মোঃ হান্নানুল হক	হান্নানুল হক	হান্নানুল হক
১০।	মোঃ হান্নানুল হক	হান্নানুল হক	হান্নানুল হক

LRC-6

107

①

Name of road:- 107 to IcharKauri road and Sign board to Kammuri road

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	আব্দুল্লাহ মোহন হামিদ হামিদ	কমিউনিটি ওয়েব ডেভেলপার সাইট ডিজাইন/কোডিং	আব্দুল্লাহ ২২/০২/২০২০
২।	ডাঃ মোকতার হোসন	চিকিৎসক	মোঃ মোকতার
৩।	ডাঃ আবু হান্না	শিক্ষক	আবু হান্না
৪।	মোঃ মোহাম্মদ আলী	চাকরি	মোঃ মোহাম্মদ আলী
৫।	ডাঃ বাবুল হোসন	কমিউনিটি	
৬।	মোঃ মাহমুদ আলী	কমিউনিটি	
৭।	ডাঃ মাহমুদ আলী	কমিউনিটি	
৮।	ডাঃ মোকতার হোসন (মোহাম্মদ)	কমিউনিটি	আবু হান্না
৯।	জহিরুল ইসলাম গারু	কমিউনিটি	জহিরুল ইসলাম গারু
১০।	ডাঃ মোকতার হোসন	কমিউনিটি	মোঃ মোকতার

LRC-6

107

~~107~~ ①

Name of road:- 107 to IcharKandi road and sign board
to Kamalpur road
যেগকসি গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	আব্দুল্লাহ আল মামুন হাউস	কাজিমুল তওন আল সাইদুল ইসলাম	আব্দুল্লাহ ০২/০২/২২
২।	মো: মোকতার হোসন	কামারী	মোঃ মোকতার
৩।	মো: আবু হান্নিফা	কিষ্কক	হিমাংশু
৪।	মোঃ মোহাম্মদ আলী	চাকরী	<u>মোঃ</u>
৫।	মো: বাবুল আলম	কামারী	
৬।	মো: মাহমুদ আলী	কামারী	
৭।	মো: মাহমুদ হোসন	কামারী	
৮।	মো: আবদুল হোসন (মোঃ আলী)	কামারী	আবদুল
৯।	জাহিদ হোসন আলী	কামারী	বাবু
১০।	মো: মাহমুদ হোসন	কামারী	মাহমুদ

02

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	ডাক্তার: কিউলী	সার্জন	কিউলী
২।	মোজা: সুমি	সার্জন	সুমি
৩।	মোজা: সিনি	।	সিনি
৪।	মুন্নিয়া	।	মুন্নিয়া
৫।	বিলু	।	মুন্নিয়া
৬।	এলেনা	।	
৭।	মোজা: মোজা	।	
৮।	চেলু	।	
৯।	জাহানারা	।	
১০।	জামিনা	হাজি	জামিনা

GCC
ORU-21

Shahid Niamet road starting from BADE to
near TNT mark at - Dhaka Uymurshah PAD

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	এমদা হুসন	ফ্রাইলার	এমদা হুসন
২।	মোঃ আফজাদ (কাথোরা)	হাস	আফ
৩।	মোঃ সাকিব (কাথোরা)	চাও	Sakib
৪।	মোঃ এত্বাব	কমিস্সী	এত্বাব
৫।	মাদাম হোসেন (কাথোরা)	গ্রুপ	Sadek
৬।	মোঃ জিকির (কাথোরা)	বিসয়	জিকির
৭।	মোঃ সাফিকুল ইসলাম	বায়ট	সাফিকুল
৮।	আব্বাস হাফিজ	হাস	আব্বাস
৯।	আব্দুল্লাহ আলী	বায়ট	Abul
১০।	মোঃ মনির হোসেন	বায়ট	Monir


02

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	আবদুল্লাহ	ছাত্রী	আবদুল্লাহ
২।	মোহাম্মদ: কাদুলী	গবেষক	কাদুলী
৩।	মোহাম্মদ: সুব্রী আক্তার	মোহাম্মদ: সুব্রী	সুব্রী
৪।	মোহাম্মদ: সুব্রী	ছাত্রী	মোহাম্মদ: সুব্রী
৫।	সুহানা	ছাত্রী	সুহানা
৬।			
৭।			
৮।			
৯।			
১০।			

Ambagh Municipal Road

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	মোঃ হাফিজুল ইসলাম	জাতিপিয়ন-১০	 ১২/১১/১৭
২।	মোঃ আব্দুল হান্নান	গৃহস্থালী	মোঃ আব্দুল হান্নান
৩।	মোঃ মিজানুর রহমান	প্রমাণ হনি প্রসিডিং	বিডিডি
৪।	মোঃ মিলন হোসেন	ছাত্র	মিলন
৫।	ডাঃ মোঃ ওসমান	ডাক্তার	১২/১২/১৭
৬।	ডাঃ ওসমান	ডাক্তার	১২/১২/১৭
৭।	মোঃ মাহবুবুল ইসলাম	চাকরি	মাহবুবুল ইসলাম
৮।	মোঃ মোস্তাফিজ হোসেন	বসবস	মোঃ মোস্তাফিজ
৯।	মোঃ মাহবুবুল ইসলাম	গৃহস্থালী	মাহবুবুল ইসলাম
১০।	মোঃ মোস্তাফিজ হোসেন	মহানগর সিদ্ধ	মোস্তাফিজ

LRC-6

107

~~107~~ ①

Name of road:- 107 to Icharkandi road and Sign board to Kammururi road

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	আব্দুল্লাহ মোহাম্মদ হামিদ	জমিদার ওয়েল্ডিং সাইনবোর্ড নির্মাণকারী	আব্দুল্লাহ ২২/০২/২০২১
২।	ডাঃ মোকতার হোসেন	কৃষক	মোঃ মোকতার
৩।	ডাঃ আবু হান্নিফা	কৃষক	আবু হান্নিফা
৪।	মোঃ জহেজ্জাজ্জিদ	চাফি	জহেজ্জাজ্জিদ
৫।	মোঃ বাবুল হোসেন	কৃষক	
৬।	মোঃ মাসুম নাসির	কৃষক	
৭।	মোঃ মাকসুম হোসেন	কৃষক	
৮।	ডাঃ মোকতার হোসেন (চাফি)	কৃষক	আবু হান্নিফা
৯।	জহেজ্জাজ্জিদ	কৃষক	জহেজ্জাজ্জিদ
১০।	ডাঃ মোকতার হোসেন	কৃষক	জহেজ্জাজ্জিদ

LRC-6

107

~~107~~ ①

Name of road:- 107 to Icharkausi road and sign board to Kamakuri road

ফোকাস গ্রুপ আলোচনায় অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	আব্দুল্লাহ আল হামুদ হামুদ	জাতিসংঘের তত্ত্বাবধায় গার্মেন্টস ইন্ডাস্ট্রি সেক্টর	আব্দুল্লাহ ২২/০২/২২
২।	মো: হোসেন হোসেন	কর্মসংস্থান	মোঃ মেজদার
৩।	মো: আবু হান্নান	জিএসসি	জিএসসি
৪।	মোঃ ফারুক হোসেন	চাকরি	<u>ফারুক</u>
৫।	মো: বাবুল হোসেন	কর্মসংস্থান	
৬।	মো: মাহমুদ হোসেন	কর্মসংস্থান	
৭।	মো: মুকুল হোসেন	চাকরি	
৮।	মো: আবদুল হোসেন (গোথাল)	কর্মসংস্থান	আবদুল
৯।	জিউল ইসলাম বাবু	কর্মসংস্থান	বাবু
১০।	মো: আরফ হোসেন	কর্মসংস্থান	আরফ

ফোকাস গ্রুপ আলোচনার অংশ গ্রহণকারীর হাজিরা

ক্রমিক সংখ্যা	নাম ও ঠিকানা	পেশা/পদবী	স্বাক্ষর
১।	ডোহা: কিউলী	সার্জন	কিউলী
২।	ডোহা: সুইস	সার্জন	সুইস
৩।	ডোহা: মিনি	।	মিনি
৪।	সুইসিয়া	।	সুইসিয়া
৫।	বিল	।	সুইসিয়া
৬।	সুইসিয়া	।	
৭।	ডোহা: জাফরজান	।	
৮।	সুইসিয়া	।	
৯।	জাহানারা	।	
১০।	জাহানারা	হাজী	জাহানারা

Photographs of Community Consultations



Consultation at Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway



Consultation at Shahid Niamat Road starting from BADC Road to TNT morh at Dhaka-Mymensingh Highway





Consultation at Ambagh Municipal Road from Era Filling Station on Dhaka-Tangail Road to Ambagh GP School via Dalai Morh, including Link Roads





Consultation at Road from IUT to Icharkandi Road & Road from
Signboard to Kamarjuri Road

Appendix 10: Sample Grievance Registration Form

(To be available in Bangla and Other Local Language, if any)

The _____ Project welcomes complaints, suggestions, queries and comments regarding project implementation. We encourage persons with grievance to provide their name and contact information to enable us to get in touch with you for clarification and feedback.

Should you choose to include your personal details but want that information to remain confidential, please inform us by writing/typing ***(CONFIDENTIAL)*** above your name. Thank you.

Date	Place of registration				
Contact Information/Personal Details					
Name		Gender	<input type="checkbox"/> Male <input type="checkbox"/> Female	Age	
Home Address					
Village / Town					
District					
Phone no.					
E-mail					
Complaint/Suggestion/Comment/Question Please provide the details (who, what, where and how) of your grievance below: If included as attachment/note/letter, please tick here:					
How do you want us to reach you for feedback or update on your comment/grievance?					

FOR OFFICIAL USE ONLY

Registered by: (Name of Official registering grievance)	
Mode of communication: <input type="checkbox"/> Note/Letter <input type="checkbox"/> E-mail <input type="checkbox"/> Verbal/Telephonic	
Reviewed by: (Names/Positions of Official(s) reviewing grievance)	
Action Taken:	
Whether Action Taken Disclosed:	<input type="checkbox"/> Yes <input type="checkbox"/> No
Means of Disclosure:	

Appendix 11: Suggested Template for Record-Keeping of Grievances

[illegible]

Appendix 12: Indicative Terms of Reference for Safeguards Specialist for PMCU, PIUs and PDSC

A. Preparation, Design, and Supervision Consultants (PDSC)

1. Environmental Safeguards Specialist (National)

1. **Experience.** A civil engineer with specialization in environment, having at least 5-10 years of working experience related to the integration of environmental issues in design, and construction of infrastructure projects. Past experience working on donor projects preferable.

2. Detailed Tasks:

- (i) Prepare Initial Environmental Examination (IEE) in accordance with the Environmental Assessment Review Framework (EARF) for subprojects;
- (ii) Assist PMCU Environment Officer in ensuring prepared IEEs are submitted to ADB for review;
- (iii) Assist PMCU in ensuring approved IEEs are disclosed on PMCU/LGED website;
- (iv) Ensure approved final IEEs and Environmental Management Plans (EMPs) are included in contract documents;
- (v) Assist PMCU in ensuring compliance of the project and its subprojects with all relevant national laws;
- (vi) Interact with the sector specialists and integrate environmentally sound practices into the detailed design of project components;
- (vii) Work out the site specific mitigation and adaptation measures for components as required and integrate the same into contractual provisions;
- (viii) Assist the international environment/Climate Change specialist in environmental training programs and workshops for the staffs of the PMCU, PIU and contractors and in accordance to the Capacity Building Program;
- (ix) Prepare activity plans as identified in IEE (includes site management plans, waste management plans, sludge management and disposal plans, occupational safety plans, etc.);
- (x) Assist PIU in reviewing the contractors' SEMP to ensure compliance with the IEE/EMP;
- (xi) Assist PIU in supervising the implementation of the EMP and SEMP by the contractors;
- (xii) Assist PIU in preparing quarterly environmental monitoring reports and submit to PMCU;
- (xiii) Review site specific environmental enhancement/mitigation designs worked out by the contractor and assist PIU in approving such designs;
- (xiv) Assist in providing occupational health and safety training for contractors' personnel before commencement of civil works for all sub-projects;
- (xv) Assist the PMCU environment officer in preparing semi-annual environmental monitoring reports and submit to ADB;
- (xvi) Establish dialogue with the affected communities and ensure that the environmental concerns and suggestions are incorporated and implemented in the project;
- (xvii) Assist PMCU and PIUs in attending to or facilitating responses to any public grievances per GRM; and
- (xviii) Assist in any other task assigned by the PMCU Environment Officer and/or supervising consultant in relevance to effective project implementation.

B. Project Management Coordination unit

1. Environmental Safeguards Officer – PMCU

3. **Experience.** An Environmental Engineer / scientist with experience in management of environmental issues of infrastructure projects and understanding of the regulatory framework for environmental management in Bangladesh.

4. Detailed Tasks:

- (i) Ensure the conformance of all Subprojects proposed under the project to the regulatory compliance to the Government, with reference to environmental requirements, with support from the Environmental Officer of the PIUs. This shall include preparation of the documents as required under the Environmental Conservation rules, submission of application forms, and obtaining clearances from the DOE; and ensuring conformance to the clearance conditions laid down in the clearances for the Subprojects by the DOE;
- (ii) Liaise with the various Government agencies on environmental and other regulatory matters pertaining to implementation of the subprojects;
- (iii) Work closely with the PIUs and provide guidance on the shifting of utilities and services, including obtaining necessary clearances from the respective line agencies, prior to award of civil works contracts;
- (iv) Provide support and assistance to the Government Agencies and the Asian Development Bank to supervise the implementation of the IEE during the construction as well as operation stage of the project ;
- (v) Monitor construction activities to ensure that identified and appropriate control measures are effective and in compliance with the IEE and advise PIUs for compliance with statutory requirements;
- (vi) Work in close co-ordination with the Social Safeguards officer of the PMCU and participate in the Grievance Redressal Mechanism for all grievances that are brought forward to the PMCU. Monitor on a continuous basis the effective functioning of the Grievance mechanisms at the PIU and Pourashava levels on all grievances related to environmental issues; and
- (vii) Jointly (with the environmental engineer of the PMCU), review the environmental performance of the project through an assessment of the periodic environmental monitoring reports submitted by the PDSC; provide a summary of the same to the Project Director, and initiate necessary follow-up actions.

2. Environmental Engineer - PMCU

5. **Experience.** A Civil Engineer with specialization in Environment with experience in implementation of environmental management plans of infrastructure projects, especially those funded by donor agencies.

6. Detailed Tasks.

- (i) Review the IEE Document and contract clauses and ensure adequacy under ADB's Environmental Assessment Guidelines, 2003 and the updated Safeguards Policy Statement, 2009 and identify any areas for improvement.
- (ii) Ensure that the subproject design and specifications adequately reflect the IEE.

- (iii) Monitor construction activities to ensure that identified and appropriate control measures are effective and in compliance with the IEE.
- (iv) Review and approve the Contractor's Implementation Plan for the environmental measures, as per IEEs/EMPs.
- (v) Liaise with the Contractors and Consultants on the implementation of the Environmental management measures proposed in the IEE/EMP.
- (i) Jointly (with the environmental safeguards officer of the PMCU), review the environmental performance of the project through an assessment of the periodic environmental monitoring reports submitted by the PDSC; provide a summary of the same to the Project Director, and initiate necessary follow-up actions.
- (ii) Document the good practices in the project, with support from Environmental Specialists of the PDSC and PIU on (a) incorporation and integration of environmental issues into engineering design and (b) on implementing environmental measures in the construction, and dissemination of the same.

C. Project Implementation Unit

1. Environmental Officer – Project Implementation Unit

7. **Experience.** A civil engineer with working experience related to the integration of environmental issues in design, and construction of infrastructure projects.

8. Detailed tasks:

- (i) Support the Environmental Safeguards officer of the PMCU towards ensuring the conformance of the subproject to the regulatory compliance to the Government, with reference to environmental requirements; including preparation of documents required for clearances, obtaining clearances from the divisional office of the DOE, etc..
- (ii) Work with the PDSC Environmental Specialists in the preparation of the Environmental Safeguards Documents; including integration of environmental provisions into the contract provisions of the respective subprojects.
- (iii) With support of the PMCU and PDSC Environmental Specialists, monitor compliance of the implementation of the environmental provisions; and ensure that identified control measures are effective and in compliance with the IEE.
- (iv) Review and approve the Contractor's Implementation Plan for the environmental measures, as per IEEs/EMPs.
- (v) Liaise with the Contractors and Consultants on the implementation of the Environmental management measures proposed in the IEE/EMP; including the implementation of the environmental monitoring plan outlined in the IEE.
- (vi) Establish dialogue with the affected communities and ensure that the environmental concerns and suggestions are incorporated and implemented in the project.
- (vii) Participate in the Grievance redressal of all grievances pertaining to environment and support the PIU/Pourashava in redressal of the same.
- (viii) Prepare and submit environmental monitoring and implementation progress reports with support from PDSC consultants, to the PMCU.
- (ix) Assist Environmental Specialist of the PMCU to prepare good practice dissemination notes based on the experience gained from site supervision.

Appendix 13: Traffic Management Plan Template

A. Principles

1. One of the prime objectives of this traffic management plan (TMP) is to ensure the safety of all the road users along the work zone, and to address the following issues:
 - the safety of pedestrians, bicyclists, and motorists travelling through the construction zone;
 - protection of work crews from hazards associated with moving traffic;
 - mitigation of the adverse impact on road capacity and delays to the road users;
 - maintenance of access to adjoining properties
 - Avoid hazards in addressing issues that may delay the project.

B. Operating Policies for Traffic Management Plan


2. The following principles will help promote safe and efficient movement for all road users (motorists, bicyclists, and pedestrians, including persons with disabilities) through and around work zones while reasonably protecting workers and equipment.
 - Make traffic safety and temporary traffic control an integral and high-priority element of every project from planning through design, construction, and maintenance.
 - Inhibit traffic movement as little as possible.
 - Provide clear and positive guidance to drivers, bicyclists, and pedestrians as they approach and travel through the temporary traffic control zone.
 - Inspect traffic control elements routinely, both day and night, and make modifications when necessary.
 - Pay increased attention to roadside safety in the vicinity of temporary traffic control zones.
 - Train all persons that select, place, and maintain temporary traffic control devices.
 - Keep the public well informed.
 - Make appropriate accommodation for abutting property owners, residents, businesses, emergency services, railroads, commercial vehicles, and transit operations.


C. Analyze the Impact Due to Street Closure

3. Apart from the capacity analysis, a final decision to close a particular street and divert the traffic should involve the following steps:
 - approval from the local authorities to use the local streets as detours;
 - consultation with businesses, community members, traffic police, etc, regarding the mitigation measures necessary at the detours where the road is diverted during the construction;
 - determining of the maximum number of days allowed for road closure, and incorporation of such provisions into the contract documents;
 - determining if additional traffic control or temporary improvements are needed along the detour route;
 - considering how access will be provided to the worksite;
 - contacting emergency service, school officials, and transit authorities to determine if there are impacts to their operations; and
 - developing a notification program to the public so that the closure is not a surprise. As part of this program, the public should be advised of alternate routes that commuters can take or will have to take as result of the traffic diversion.

4. If full road-closure of certain streets within the area is not feasible due to inadequate capacity of the Detour Street or public opposition, the full closure can be restricted to weekends.

Figure A8.1: Policy Steps for the TMP

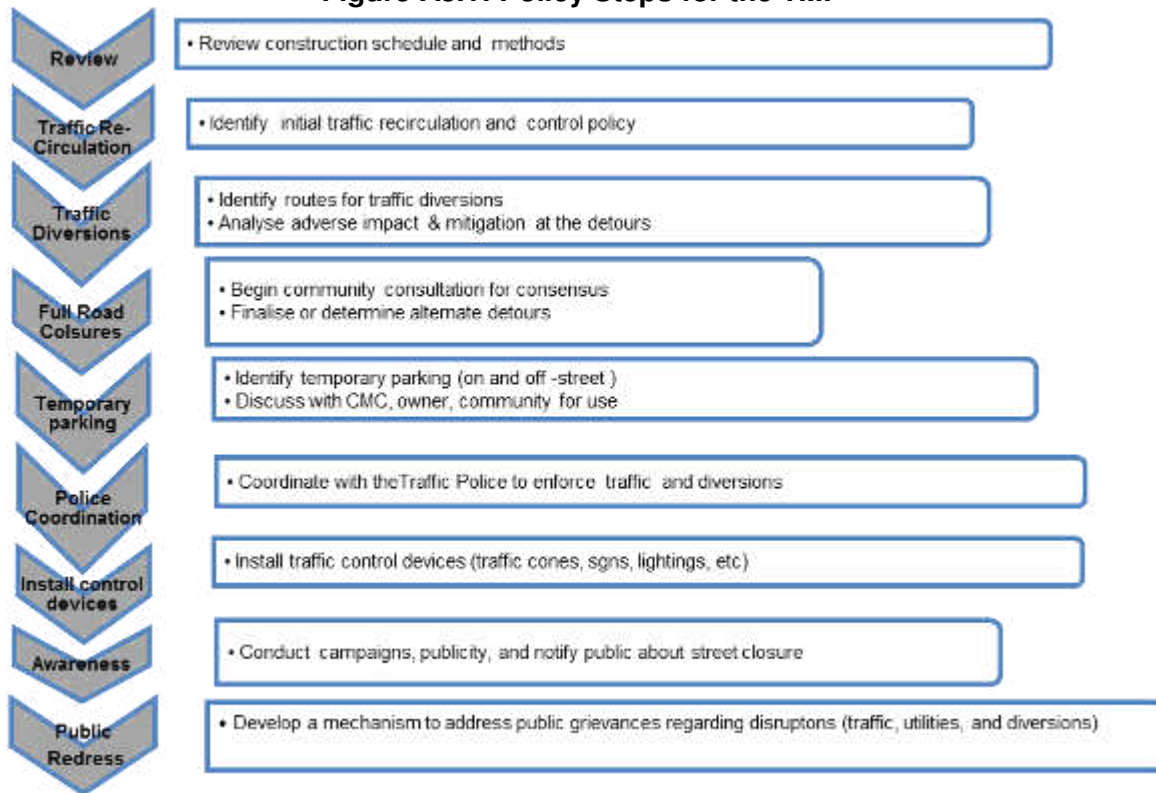

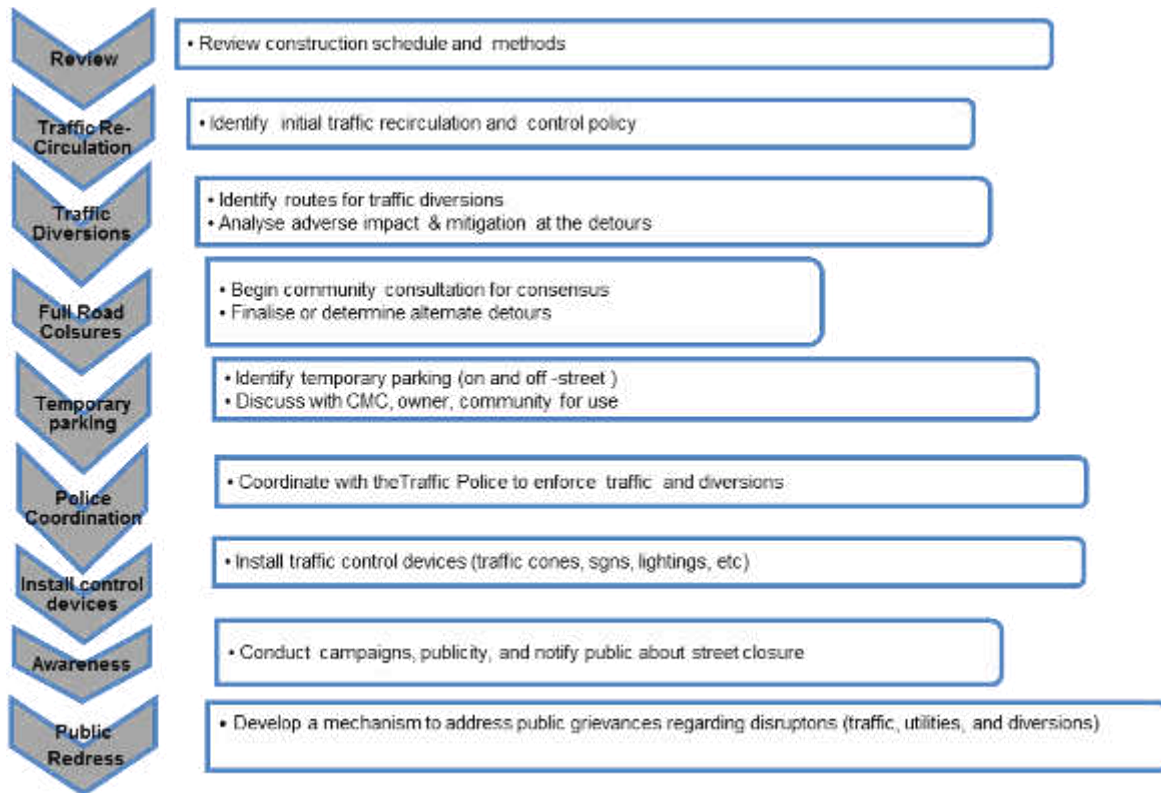

D. Public awareness and notifications

5. As per discussions in the previous sections, there will be travel delays during the constructions, as is the case with most construction projects, albeit on a reduced scale if utilities and traffic management are properly coordinated. There are additional grounds for travel delays in the area, as most of the streets lack sufficient capacity to accommodate additional traffic from diverted traffic as a result of street closures to accommodate the works.

6. The awareness campaign and the prior notification for the public will be a continuous activity which the project will carry out to compensate for the above delays and minimize public claims as result of these problems. These activities will take place sufficiently in advance of the time when the roadblocks or traffic diversions take place at the particular streets. The reason for this is to allow sufficient time for the public and residents to understand the changes to their travel plans. The project will notify the public about the roadblocks and traffic diversion through public notices, ward level meetings and city level meeting with the elected representatives.

7. The PMCU and PIU will also conduct an awareness campaign to educate the public about the following issues:

- traffic control devices in place at the work zones (signs, traffic cones, barriers, etc.);
- defensive driving behavior along the work zones; and
- reduced speeds enforced at the work zones and traffic diversions.

8. It may be necessary to conduct the awareness programs/campaigns on road safety during construction.

9. The campaign will cater to all types of target groups i.e. children, adults, and drivers. Therefore, these campaigns will be conducted in schools and community centers. In addition, the project will publish a brochure for public information. These brochures will be widely circulated around the area and will also be available at the PMCU, PIU and the contractor's site offices. The text of the brochure should be concise to be effective, with a lot of graphics. It will serve the following purpose:

- Explain why the brochure was prepared, along with a brief description of the project;
- Advise the public to expect the unexpected;
- Educate the public about the various traffic control devices and safety measures adopted at the work zones;
- Educate the public about the safe road user behavior to emulate at the work zones;
- Tell the public how to stay informed or where to inquire about road safety issues at the work zones (name, telephone, mobile number of the contact person; and
- Indicate the office hours of relevant offices.

E. Vehicle Maintenance and Safety

10. A vehicle maintenance and safety program shall be implemented by the construction contractor. The contractor should ensure that all the vehicles are in proper running condition and it comply with roadworthy and meet certification standards of Government of Bangladesh. All vehicles to be used shall be in perfect condition meeting pollution standards of Government of Bangladesh. The vehicle operator requires a prestate of shift checklist. Additional safety precautions will include the requirement for:

- Driver will follow the special code of conduct and road safety rules of Government of Bangladesh.
- Drivers to ensure that all loads are covered and secured drivers to ensure operation equipment can't leak materials hauled
- Vehicles will be cleaned and maintained in designed places.

F. Install traffic control devices at the work zones and traffic diversion routes

11. The purpose of installing traffic control devices at the work zones is to delineate these areas to warn, inform, and direct the road users about a hazard ahead, and to protect them as well as the workers. As proper delineation is a key to achieve the above objective, it is important to install good traffic signs at the work zones. The following traffic control devices are used in work zones:

- Signs
- Pavement Markings
- Channelizing Devices
- Arrow Panels
- Warning Lights

12. Procedures for installing traffic control devices at any work zone vary, depending on road configuration, location of the work, construction activity, duration, traffic speed and volume, and pedestrian traffic. Work will take place along major roads, and the minor internal roads. As such, the traffic volume and road geometry vary. The main roads carry considerable traffic; internal roads in the new city areas are wide but in old city roads very narrow and carry considerable traffic. However, regardless of where the construction takes place, all the work zones should be cordoned off, and traffic shifted away at least with traffic cones, barricades, and temporary signs (temporary “STOP” and “GO”).

13. The work zone should take into consideration the space required for a buffer zone between the workers and the traffic (lateral and longitudinal) and the transition space required for delineation, as applicable. For the works, a 30 cm clearance between the traffic and the temporary STOP and GO signs should be provided. In addition, at least 60 cm is necessary to install the temporary traffic signs and cones.

14. Traffic police should regulate traffic away from the work zone and enforce the traffic diversion result from full street closure in certain areas during construction. Flaggers/ personnel should be equipped with reflective jackets at all times and have traffic control batons (preferably the LED type) for regulating the traffic during night time.

15. In addition to the delineation devices, all the construction workers should wear fluorescent safety vests and helmets in order to be visible to the motorists at all times. There should be provision for lighting beacons and illumination for night constructions.

16. The PIU and contractor will coordinate with the local administration and traffic police regarding the traffic signs, detour, and any other matters related to traffic. The contractor will prepare the traffic management plan in detail and submit it along with the EMP for the final approval.

Appendix 14: Sample Daily Monitoring Sheet for Contractors

CITY REGIONS DEVELOPMENT PROJECT II Contractor Monitoring Sheet

Name of Subproject: _____
 Location of Subproject: _____
 Chainage covered (for linear works): _____
 Supervising PIU: _____
 Contractor: _____
 Contractor EHS Supervisor (or equivalent): _____
 Date of monitoring: _____

Summary of Findings

Monitoring Item	Status	Remarks
1. Compliance with Local Permit Requirements	(Secured / Application Submitted / Not Applicable)	
<i>Location/zoning permits</i>		
<i>Permit to construct</i>		
<i>Building permit</i>		
<i>Transport / hauling permits</i>		
2. Compliance with IEE Requirements	(Approved / Under Preparation / Submitted to PIU for Approval)	
<i>Site-specific EMP (SEMP)</i>		
<i>Corrective Action Plan, if any</i>		
3. Compliance with SEMP		
Construction Site	(Satisfactory / Needs Improvement / Not Implemented)	
- Conduct of toolbox talk		
- Use of PPE		
- Rest areas for male and female workers		
- Toilets for male and female workers		
- Medical kits		
- Drinking water supply		
- Dust control		
- Noise control		
- Solid waste management		
- Wastewater management		
- Chemicals storage (fuel, oil, etc.)		
- Siltation or erosion control		
- Heavy equipment staging / parking area		
- Barricades around excavation sites		
- Access to residential houses/shops/businesses		
- Traffic routing signages		
- Lightings at night		

Monitoring Item	Status	Remarks
- Trench shoring / landslide protection		
Construction Workers' Camp Site	(Available / Needs Improvement / Not Available)	
- Quarters for male and female workers		
- Sleeping utilities (e.g. beds, pillows, blankets, mosquito nets, etc.)		
- Power/Electricity supply		
- Drinking water supply		
- Toilets for male and female workers		
- General purpose water supply (cooking, washing, bathing)		
- Cooking facilities and areas		
- Solid waste management		
- Wastewater management		
- Pest control		
4. Implementation of GRM	(Yes / No or None / Under Resolution)	
<i>Complaints</i>		
<i>Complaints resolution</i>		
5. Environmental Quality Measurement	(Passed / Failed / Not Applicable)	
<i>Ambient air quality sampling</i>		
<i>Noise level measurement</i>		
<i>Receiving water quality sampling</i>		

Other Issues: _____

Attachments:

1. Copies of permits secured, if any.
2. Photos taken at worksites, if any.
(photos attached in previous monitoring sheets should not be used again).
3. Laboratory results of environmental quality measurements, if any.

Prepared by: _____
Name, Designation and Signature

Appendix 15: Sample Inspection Report for PMCU and PIUs

CITY REGIONS DEVELOPMENT PROJECT II SITE INSPECTION CHECKLIST

Subproject: _____

Date: _____

Location: _____

Chainage (for linear works): _____

MONITORING/INSPECTION QUESTIONS		FINDINGS			COMMENTS / CLARIFICATIONS
1.	Supervision and Management On-Site	Yes	No	NA	
	a. Is an EHS supervisor available?				
	b. Is a copy of the SEMP available?				
	c. Are daily toolbox talks conducted on site?				
2.	The Facilities	Yes	No	NA	
	a. Are there a medical and first aid kits on site?				
	b. Are emergency contact details available on-site?				
	c. Are there PPEs available? What are they?				
	d. Are the PPEs in good condition?				
	e. Are there firefighting equipment on site?				
	f. Are there separate sanitary facilities for male and female workers?				
	g. Is drinking water supply available for workers?				
	h. Is there a rest area for workers?				
	i. Are storage areas for chemicals available and with protection? in safe locations?				
3.	Occupational Health and Safety	Yes	No	NA	
	a. Are the PPEs being used by workers?				
	b. Are excavation trenches provided with shores or protection from landslide?				
	c. Is breaktime for workers provided?				
	d. How many for each type of collection vehicle is in current use?				
4.	Community Safety	Yes	No	NA	
	a) Are excavation areas provided with barricades around them?				
	b) Are safety signages posted around the sites?				
	c) Are temporary and safe walkways for pedestrians available near work sites?				

MONITORING/INSPECTION QUESTIONS		FINDINGS			COMMENTS / CLARIFICATIONS
	d) Is there a record of treated wastewater quality testing/measurement?				
5.	Solid Waste Management	Yes	No	NA	
	a. Are excavated materials placed sufficiently away from water courses?				
	b. Is solid waste segregation and management in place?				
	c. Is there a regular collection fo solid wastes from work sites?				
6.	Wastewater Management	Yes	No	NA	
	a) Are there separate sanitary facilities for various types of use (septic tanks, urination, washing, etc.)?				
	b) Is any wastewater discharged to storm drains?				
	c) Is any wastewater being treated prior to discharge?				
	d) Are measures in place to avoid siltation of nearby drainage or receiving bodies of water?				
	e) Are silt traps or sedimentation ponds installed for surface runoff regularly cleaned and freed of silts or sediments?				
7.	Dust Control	Yes	No	NA	
	a. Is the construction site watered to minimize generation of dust?				
	b. Are roads within and around the construction sites sprayed with water on regular intervals?				
	c. Is there a speed control for vehicles at construction sites?				
	d. Are stockpiles of sand, cement and other construction materials covered to avoid being airborne?				
	e. Are construction vehicles carrying soils and other spoils covered?				
	f. Are generators provided with air pollution control devices?				
	g. Are all vehicles regularly maintained to minimize emission of black smoke? Do they have valid permits?				
8.	Noise Control	Yes	No	NA	
	a) Is the work only taking place between 7 am and 7 pm, week days?				

MONITORING/INSPECTION QUESTIONS		FINDINGS			COMMENTS / CLARIFICATIONS
	b) Do generators operate with doors closed or provided with sound barrier around them?				
	c) Is idle equipment turned off or throttled down?				
	d) Are there noise mitigation measures adopted at construction sites?				
	e) Are neighboring residents notified in advance of any noisy activities expected at construction sites?				
9.	Traffic Management	Yes	No	NA	
	a) Are traffic signages available around the construction sites and nearby roads?				
	b) Are re-routing signages sufficient to guide motorists?				
	c) Are the excavation sites along roads provided with barricades with reflectors?				
	d) Are the excavation sites provided with sufficient lighting at night?				
10.	Recording System	Yes	No	NA	
	a) Do the contractors have recording system for SEMP implementation?				
	b) Are the daily monitoring sheets accomplished by the contractor EHS supervisor (or equivalent) properly compiled?				
	c) Are laboratory results of environmental sampling conducted since the commencement of construction activities properly compiled?				
	d) Are these records readily available at the site and to the inspection team?				

Other Issues: _____

Prepared by: _____

Name, Designation and Signature

Appendix 16: Semi-Annual Environmental Monitoring Template

- Introduction
- Overall project description and objectives
- Environmental category as per ADB Safeguard Policy Statement, 2009
- Environmental category of each subproject as per national laws and regulations
- Project Safeguards Team

Name	Designation/Office	Email Address	Contact Number	Roles
1. PMU				
2. PIUs				
3. Consultants				

- Overall project and sub-project progress and status
- Description of subprojects (package-wise) and status of implementation (preliminary, detailed design, on-going construction, completed, and/or O&M stage)

Package Number	Components/List of Works	Contract Status (specify if under bidding or contract awarded)	Status of Implementation (Preliminary Design/Detailed Design/On-going Construction/Completed/O&M) ²²	If On-going Construction	
				%Physical Progress	Expected Completion Date

²² If on-going construction, include %physical progress and expected date of completion

- COMPLIANCE STATUS WITH NATIONAL/STATE/LOCAL STATUTORY ENVIRONMENTAL REQUIREMENTS²³

Package No.	Subproject Name	Statutory Environmental Requirements ²⁴	Status of Compliance ²⁵	Validity if obtained	Action Required	Specific Conditions that will require environmental monitoring as per Environment Clearance, Consent/Permit to Establish ²⁶

- Compliance status with environmental loan covenants

No. (List schedule and paragraph number of Loan Agreement)	Covenant	Status of Compliance	Action Required

- Compliance status with the environmental management plan (refer to EMP TaBLES in APPROVED IEE/S)
- Confirm if IEE/s require contractors to submit site-specific EMP/construction EMPs. If not, describe the methodology of monitoring each package under implementation.

Package-wise IEE Documentation Status

Package Number	Final IEE based on Detailed Design				Site-specific EMP (or Construction EMP) approved by Project Director? (Yes/No)	Remarks
	Not yet due (detailed design not yet completed)	Submitted to ADB (Provide Date of Submission)	Disclosed on project website (Provide Link)	Final IEE provided to Contractor/s (Yes/No)		

²³ All statutory clearance/s, no-objection certificates, permit/s, etc. should be obtained prior to award of contract/s. Attach as appendix all clearance obtained during the reporting period. If already reported, specify in the "remarks" column.

²⁴ Specify (environmental clearance? Permit/consent to establish? Forest clearance? Etc.)

²⁵ Specify if obtained, submitted and awaiting approval, application not yet submitted

²⁶ Example: Environmental Clearance requires ambient air quality monitoring, Forest Clearance/Tree-cutting Permit requires 2 trees for every tree, etc.

- For each package, provide name/s and contact details of contractor/s' nodal person/s for environmental safeguards.

Package-wise Contractor/s' Nodal Persons for Environmental Safeguards

[illegible]

- With reference to approved EMP/site-specific EMP/construction EMP, complete the table below

Summary of Environmental Monitoring Activities (for the Reporting Period)²⁷

Impacts (List from IEE)	Mitigation Measures (List from IEE)	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name of Person Who Conducted the Monitoring
Design Phase						
Pre-Construction Phase						
Construction Phase						
Operational Phase						

²⁷ Attach Laboratory Results and Sampling Map/Locations

Overall Compliance with CEMP/ EMP

No.	Sub-Project Name	EMP/ CEMP Part of Contract Documents (Y/N)	CEMP/ EMP Being Implemented (Y/N)	Status of Implementation (Excellent/ Satisfactory/ Partially Satisfactory/ Below Satisfactory)	Action Proposed and Additional Measures Required

- **APPROACH AND METHODOLOGY FOR ENVIRONMENTAL MONITORING OF THE PROJECT**
- Briefly describe the approach and methodology used for environmental monitoring of each sub-project.
- **MONITORING OF ENVIRONMENTAL IMPACTS ON PROJECT SURROUNDINGS (AMBIENT AIR, WATER QUALITY AND NOISE LEVELS)**
- Discuss the general condition of surroundings at the project site, with consideration of the following, whichever are applicable:
 - Confirm if any dust was noted to escape the site boundaries and identify dust suppression techniques followed for site/s.
 - Identify if muddy water is escaping site boundaries or if muddy tracks are seen on adjacent roads.
 - Identify type of erosion and sediment control measures installed on site/s, condition of erosion and sediment control measures including if these are intact following heavy rain;
 - Identify designated areas for concrete works, chemical storage, construction materials, and refueling. Attach photographs of each area in the Appendix.
 - Confirm spill kits on site and site procedure for handling emergencies.
 - Identify any chemical stored on site and provide information on storage condition. Attach photograph.
 - Describe management of stockpiles (construction materials, excavated soils, spoils, etc.). Provide photographs.
 - Describe management of solid and liquid wastes on-site (quantity generated, transport, storage and disposal). Provide photographs.
 - Provide information on barricades, signages, and on-site boards. Provide photographs in the Appendix.
 - Indicate if there are any activities being under taken out of working hours and how that is being managed.
- Briefly discuss the basis for environmental parameters monitoring.

- Indicate type of environmental parameters to be monitored and identify the location.
- Indicate the method of monitoring and equipment used.
- Provide monitoring results and an analysis of results in relation to baseline data and statutory requirements.

As a minimum the results should be presented as per the tables below.

Air Quality Results

Site No.	Date of Testing	Site Location	Parameters (Government Standards)		
			PM10 µg/m3	SO2 µg/m3	NO2 µg/m3

Site No.	Date of Testing	Site Location	Parameters (Monitoring Results)		
			PM10 µg/m3	SO2 µg/m3	NO2 µg/m3

Water Quality Results

Site No.	Date of Sampling	Site Location	Parameters (Government Standards)					
			pH	Conductivity µS/cm	BOD mg/L	TSS mg/L	TN mg/L	TP mg/L

Site No.	Date of Sampling	Site Location	Parameters (Monitoring Results)					
			pH	Conductivity µS/cm	BOD mg/L	TSS mg/L	TN mg/L	TP mg/L

Noise Quality Results

Site No.	Date of Testing	Site Location	LA _{eq} (dBA) (Government Standard)	
			Day Time	Night Time

Site No.	Date of Testing	Site Location	LA _{eq} (dBA) (Monitoring Results)	
			Day Time	Night Time

- **GRIEVANCE REDRESS MECHANISM**

- Provide information on establishment of grievance redress mechanism and capacity of grievance redress committee to address project-related issues/complaints. Include as appendix Notification of the GRM (town-wise if applicable).

- **COMPLAINTS RECEIVED DURING THE REPORTING PERIOD**
- Provide information on number, nature, and resolution of complaints received during reporting period. Attach records as per GRM in the approved IEE. Identify safeguards team member/s involved in the GRM process. Attach minutes of meetings (ensure English translation is provided).

- **SUMMARY OF KEY ISSUES AND REMEDIAL ACTIONS**
- Summary of follow up time-bound actions to be taken within a set timeframe.

- **APPENDIXES**
- Photos
- Summary of consultations
- Copies of environmental clearances and permits
- Sample of environmental site inspection report
- all supporting documents including **signed** monthly environmental site inspection reports prepared by consultants and/or contractors
- Others