

গণপ্রজাতন্ত্রী বাংলাদেশ সরকার
স্থানীয় সরকার প্রকৌশল অধিদপ্তর
আগারগাঁও, শেরেবাংলা নগর
ঢাকা-১২০৭।
www.lged.gov.bd

স্মারক নং-এলজিইডি/সিই/পরিকল্পনা/জি-০৩/২০১৩/৬৭৩

তারিখ : ১৫/১২/২০১৫ খ্রিঃ।


অফিস আদেশ

বিষয় : প্রকল্পের ডিপিপি/আরডিপিপি প্রস্তুত বিষয়ক নির্দেশনা।

উপর্যুক্ত বিষয়ের প্রেক্ষিতে জানানো যাচ্ছে যে, এখন হতে ডিপিপি/আরডিপিপি প্রস্তুতকালে নিম্নবর্ণিত নির্দেশনাবলী অনুসরণ করতে হবে:

- ১। ডিপিপি'র নির্ধারিত ছকের পাট-বি অংশের ২৪ নং ক্রমিকে ৬ষ্ঠ পঞ্চবার্ষিক পরিকল্পনা (SFYP)-র পরিবর্তে ৭ম পঞ্চবার্ষিক পরিকল্পনা (7FYP)-র তথ্যাদি সন্নিবেশ করতে হবে;
- ২। পাট-বি অংশের ২৪ নং ক্রমিকে Millennium Development Goal (MDG)-র পরিবর্তে Sustainable Development Goal (SDG)-র তথ্যাদি প্রদান করতে হবে;
- ৩। প্রকল্প এলাকার সড়ক ও সেতু সংক্রান্ত পরিসংখ্যান নির্ধারিত ছকে প্রদান করতে হবে (নমুনা-ক);
- ৪। প্রকল্পভূক্ত প্রতিটি স্কীমের তথ্য নির্ধারিত ছকে প্রদান করতে হবে (নমুনা-খ);
- ৫। ব্রীজ এবং কালভার্টের তথ্য আলাদা আলাদাভাবে প্রদান করতে হবে;
- ৬। সড়কের ক্ষেত্রে ক্যাটাগরীভিত্তিক ক্রস-সেকশন এবং একক ব্যয়ের হিসাব প্রদান করতে হবে (নমুনা-গ)।

সকল ডিপিপি/আরডিপিপি-তে প্রদেয় তথ্যের ক্ষেত্রে অভিন্নতা আনার জন্য পরিকল্পনা কমিশনের পরামর্শের প্রেক্ষিতে এ নির্দেশনা জারী করা হ'ল।


(শ্যামা প্রসাদ অধিকারী)

প্রধান প্রকৌশলী

ফোন : ০২-৯১২৪০২৭

ই-মেইল : ce@lged.gov.bd

অনুলিপি:

- ১। অতিরিক্ত প্রধান প্রকৌশলী (সকল), এলজিইডি, সদর দপ্তর ঢাকা।
- ২। তত্ত্বাবধায়ক প্রকৌশলী (সকল), এলজিইডি, সদর দপ্তর ঢাকা।
- ৩।প্রকল্প পরিচালক (সকল), এলজিইডি, সদর দপ্তর ঢাকা।

Category wise Road Status in the Project Area

District: Pabna

Sl. No.	Road category/Type	Total length (km)	Already developed length (km)	Length included in other on-going projects (km)	Length to be developed (km)	Length proposed in this project (km)
1	2	3	4	5	6	7
1	UZR	725.00	533.00	100.00	92.00	50.00
2	UNR	739.00	416.00	150.00	173.00	75.00
3	VR- Type A	3944.00	766.00	300.00	2878.00	100.00
4	VR- Type B	5000.00	800.00	500.00	3700.00	120.00

District: Sirajganj

Sl. No.	Road category/Type	Total length (km)	Already developed length (km)	Length included in other on-going projects (km)	Length to be developed (km)	Length proposed in this project (km)
1	2	3	4	5	6	7
1	UZR	599.00	458.00	100.00	41.00	30.00
2	UNR	735.00	318.00	150.00	267.00	75.00
3	VR- Type A	3123.00	260.00	300.00	2563.00	100.00
4	VR- Type B	5000.00	800.00	500.00	3700.00	120.00

Proposed Scheme Details (Roads)

District: Pabna

Upazila: Ishwardi

Sl. No.	Road ID- (Scheme Name)	Total length (km)	Already developed length (km)	Length included in other on-going projects (km)	Remaining length (km)	Proposed for development in this project	
						Length (km)	Chainage
1	2	3	4	5	6	7	8
UZR							
1.	176392007- Improvement of Muladi UP- RHD- Dulthihat Road	8.05	1.00	2.00	5.05	2.00	Ch. 3000-5000 m
2.	176392008- Sahapur Up - Baraichara hat via Sakregari Mora R&H road.	14.50	9.50	2.00	3.00	1.00	Ch. 11500-12500 m
3.							
4.							
UNR							
1.	176393006 – Upazila H/Q (Rail gate) - Civil hat Taltola RHD via jhaudia school Rd.	5.00	4.00	0.50	0.50	0.50	Ch. 4500-5000 m
2.							
3.							
VR-Type A							
1.	176394050 -Civil Hat Taltala (R&H) - Sara Ghat road.	3.50	1.00	1.50	1.00	0.50	Ch. 2500-3000 m
2.							
3.							
VR- Type-B							
1.	176395001-Athail Shimul shop of Mussa - SultanpurShop of Isahak Rd.	3.25	2.00	-	1.25	1.00	Ch. 2000-3000 m
2.	176395005-Dekshail Shop of Israil - Dekshail Dayan Mosque RHD.	2.50	1.00	1.00	0.50	0.50	Ch. 2000-2500 m
3.							
4.							

- Note: Please provide the information by road category [UZR, UNR, VR-A, VR-B]

Proposed Scheme Details (Structure)


District: Joypurhat

Upazila: Akkelpur

Sl. No.	Road ID- Scheme Name	Proposed structure for development in this project		
		Chainage	Length (m)	Width (m)
1	2	3	4	5
Bridge				
1.	138135032-Construction of 20m long Bridge on Lengapir Mazar(Sonamukhi ghat)-Rajkanda mallapara Road	Ch. 750 m	20.00	8.00
2.	138135033- Construction of 30m bridge on Bagunbari pucca road - Dhakin Kanupur Govt. primary school road.	Ch. 350 m	30.00	8.00
3.				
4.				
Culvert				
1.	176393005- Construction of 5m culvert on Laxmikunda UP - Charkurulia hat via Billkadar GPS road.	Ch. 750 m	5.00	4.00
2.	176394007- Construction of 6m culvert on Arpara UZR Road - Majhgram RailWay station Via Mokarampur road.	Ch. 350 m	6.00	4.00
3.				
4.				

- Note: Please provide the information by type of structure [Bridge, Culvert]

Calculation for unit cost: Improvement of 1 km Upazila Road by bituminous Carpeting (Design Type-6)

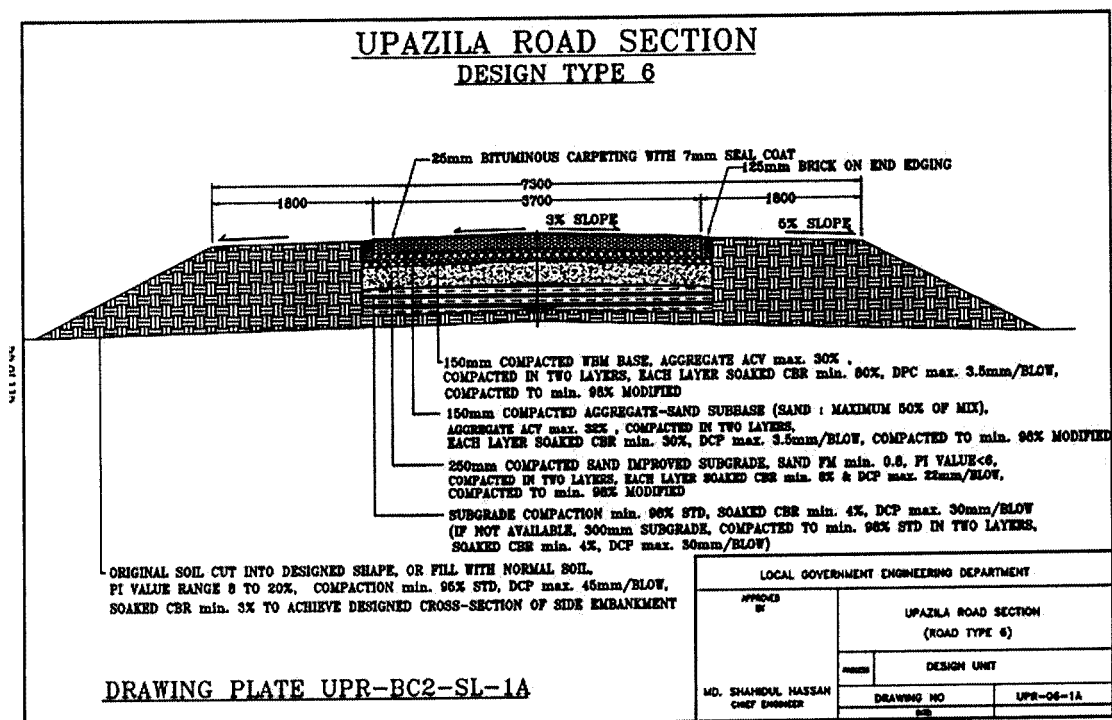

X-section: Design Type 6

Sample Unit Cost Calculation:

Sl. No.	Name of Item	Unit	Quantity	Unit rate (As per 2015 rate schedule)	Amount (Tk.) (col.4xcol.5)	Remarks
1	2	3	4	5	6	7
1.	E/W in box cutting	sqm	A	X	AX	
2.	ISG	cum	B	Y	BY	
3.	Sub base Course	cum	C	Z	CZ	
4.	Brick on End Edging	cum	D	P	DP	
5.	Supplying & Spreading Brick Chips	cum	E	Q	EQ	
6.	Labour Charge for Compaction	cum	F	R	FR	
7.	Prime Coat	sqm	G	S	GS	
8.	Tack Coat	sqm	H	T	HT	
9.	25mm Bituminous carpeting	sqm	I	U	IU	
10.	Levelling & Dressing	sqm	J	V	JV	
11.	Kilometer Post, Name Plate, Sign board etc.	sqm	K	W	KW	
12.						
13.						
14.						
Total					XYZ	

- Note: Please provide the same for each design type